


Puro Plinth

US-N16PCS



Installation Instructions

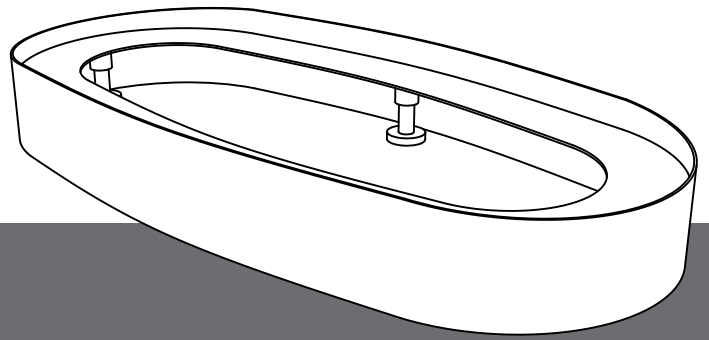

Introduction

This plinth has been fully inspected throughout the production process and only leaves our factory after a 15-step QC process. Carefully remove the plinth from the box, checking that all parts have been supplied.

Before beginning installation please check for any damage that may have occurred during transport. **Note: Damage claims cannot be made during or after installation.**

Improper installation shall result in loss of warranty in case of damage caused by impacts or rubbing against rough surfaces.

When fitting the bathtub, please follow the installation procedure supplied with the bathtub.

IMPORTANT: Please read these instructions carefully before you begin and retain for future reference.

We do not accept responsibility for any problems that may occur through incorrect installation.

RECOMMENDATIONS:

It is recommended that walls and floor are fully tiled and finished before installation. This ensures that the product is installed flat to the tile face and allows it to be easily removed if required in the future.

Installation notes

The installation must comply with all plumbing codes including local codes and be installed by a licensed plumbing contractor.




Store the plinth in a safe place until you begin installation to avoid any damage.

Avoid getting cement, grit, sand or masonry products on to the surface. Protect and cover the bathtub and plinth during the installation period to prevent damage from occurring.

IMPORTANT: Turn off the main water supply before connecting to any existing pipework or doing any maintenance.

WARNING! Please check for any hidden pipes and cables, electric or otherwise, before drilling holes in a wall or floor.

Dimensions

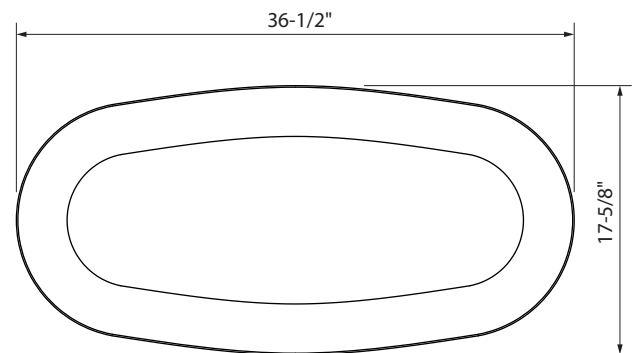


Tools required



Tape measure




Safety glasses




Set square



Pencil




Spirit level




Silicone sealant

1 Installation


- 2** Place the plinth on two wooden blocks. Apply silicone on the surface where the bathtub sits on it.

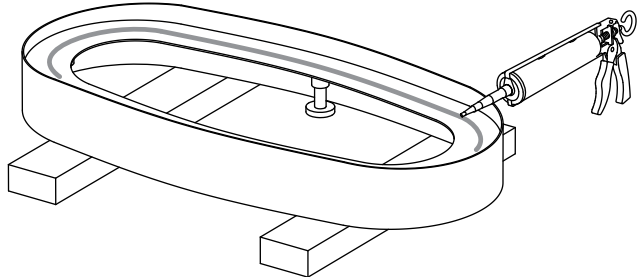


- 3** Apply silicone on the bottom of the bathtub.

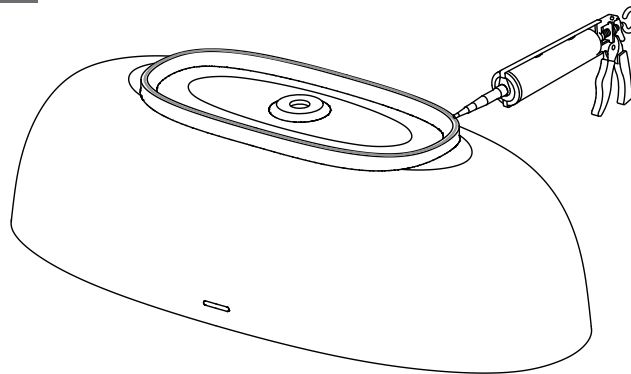


- 4** Place the bathtub onto the plinth and adjust the tub slightly to ensure it is in the proper position. Allow the silicone to dry.

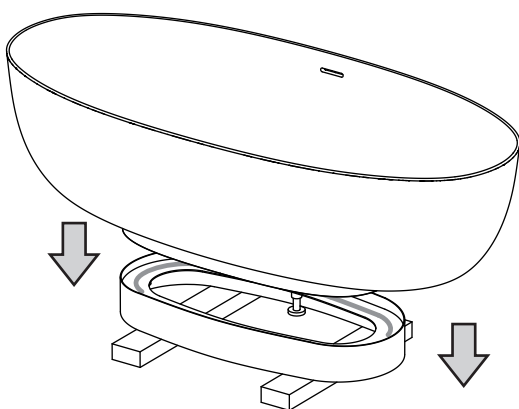


- 5** Install the waste by following the instructions supplied with both the bathtub and waste.

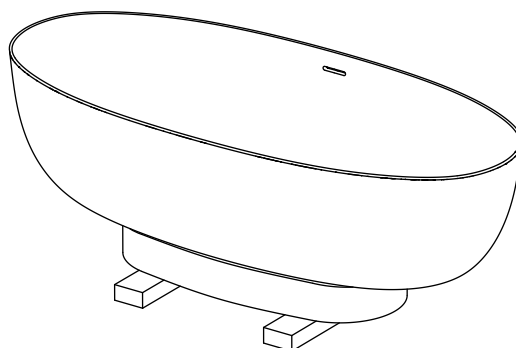

- 6** Make sure the four feet underneath the plinth level with the bottom of the plinth. The feet are for leveling only and not to bear the weight of the bathtub. Please adjust any of the feet as shown if the floor is not perfectly flat.

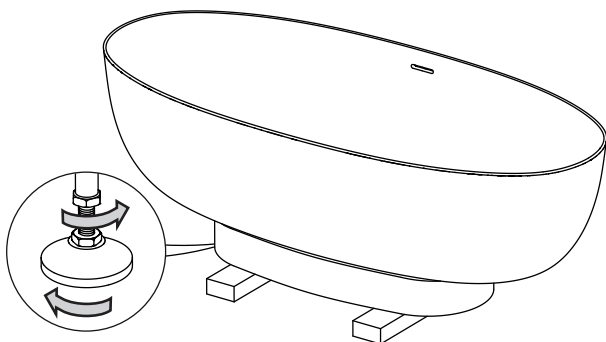

- 7** Secure the bathtub to the floor. When the bathtub is in position and the installation is complete, it is recommended that you apply a bead of silicone around the bottom of the plinth to secure it to the floor.

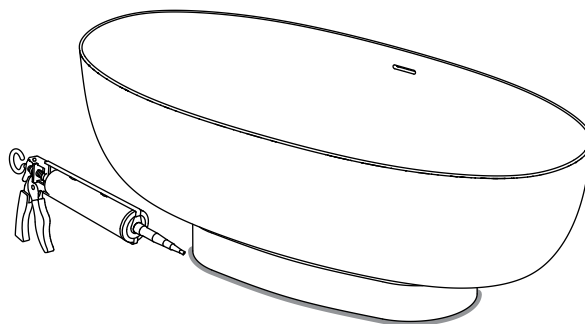

8 Cleaning Instructions

Use a mild detergent, warm water and a soft cloth to remove normal dirt and soap accumulations from the surface. Do not use caustic cleaners or disinfectants as they can alter the surface finish and void the warranty. If desired, a stainless steel cleaner such as Flitz® can be used.

Warranty - This **Crosswater London** product is covered by a limited lifetime warranty. For full details, terms and conditions visit our website.

For further information contact: **Crosswater London**, 393 Fortune Blvd., Milford, MA 01757

Toll free number: 844-XWATER-1 (844-992-8371) tel: 508-381-6062 fax: 508-381-6068

www.crosswaterlondon.com

email: technical@crosswaterlondon.com