



"I wanted to build a company that was focused entirely on its customers, their specific needs and delivering exceptional levels of service.

From the start, we introduced new and innovative products that differentiated us from the competition and delight our customers... always.'

Dave Hance, Founder

Jana Mana

crosswater' - LONDON

Crosswater London offers a complete bathroom solution, delivering European design and British style in distinctive ranges of brassware, fixtures and accessories. A curated collection of instinctively innovative products, Crosswater London offers products for every design genre from the sleek and modern to classic and traditional. Sourcing the finest materials, skilled craftsmanship and time-honored manufacturing techniques, Crosswater London is dedicated to creating products of form, function and beauty for every bath space. Founded in 1998, Crosswater London is part of the Bathroom Brands Group, Europe's largest independentlyowned bathroom manufacturer serving 25 countries. Global headquarters are located in the UK, at Lake View House, our purpose-built 129,000 square foot state-of-the art facility. Dedication to product design, innovation, craftsmanship, and keen attention to customer service are the primary reasons for continued success.

British Style. European Design. Distinctive Character.


M

λs

ell

Explore the hand-forged artistry and exquisite quality of Crosswater London.



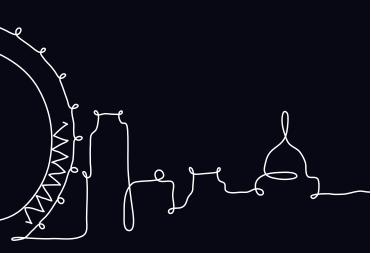





PRECISION BRASSWARE CAST IN ITALY

UNION, setting a new standard in brassware engineering, style and performance. This innovative collection is a leap forward in design for the contemporary bathroom. Presenting Italian artisanry at its finest, each component is expertly cast, precision machined, polished and perfected to offer an uplifting bathroom experience.

In a move to challenge the traditional concept of bathroom fittings, UNION is engineered to provide unparalleled functionality and designed to make a statement. Only the very best components are used, coupled with stringent quality standards resulting in a product that will stand the test of time.

UNION brings you four distinctive finishes available across a complete collection of bathroom faucets, shower valves, shower heads and bath fillers.


AN INTERNATIONAL BATHROOM COMPANY

Built upon a solid foundation from humble beginnings, Crosswater London takes great pride in creating original designs that are truly inspirational and extraordinary.

Led by founder David Hance, an international design team combines the finest in materials with precision engineering to create the highest quality products of beauty, form and function. From modern and contemporary to classic and traditional, Crosswater London offers distinctive collections for every bathroom design.

International in scope. Entrepreneurial in spirit.

Welcome to Crosswater London.



A PASSION FOR BATHROOMS THAT SETS US APART



Today we celebrate 20 years of leadership in the industry. Global resources and long-trusted relationships ensure world-class design, craftsmanship and cutting-edge technology behind every collection.





Trusted by designers, architects and homeowners, we are proud to continue our tradition of excellence here in North America. Our London Headquarters, Lake View House, is home campus to a global operation. More than 130,000 square feet of office and warehouse space featuring a dramatic and dynamic, 10,000 square foot showroom. As a part of Bathroom Brands, we continue our journey as the largest independentlyowned bathroom company in Europe.



WHY CHOOSE CROSSWATER LONDON?

Product Design and Materials

Our talented design team, led by the company's founder David Hance, brings a fresh approach to creating beautiful products with cutting-edge technology. In pursuit of flawless perfection, instinctively innovative collections combine exquisite design and ground-breaking materials for a statement in every bathroom space.

Trademark Customer Service

A cornerstone of the Crosswater way is unparalleled customer service, from technical assistance to dispatch within 24 hours of order placement.

Our philosophy is "Going the Extra Mile" for every customer, every day.

We join forces with the best luxury plumbing showrooms in the industry. Working together, we research, design and bring to market the products and services that define luxury and value.











FINISHES

	Finish code	Description	Production method	Range(s) available	Warranty
Brushed Brass	BB	A warm brass finish which is machine brushed for an even texture.	PVD	MPRO	Limited Lifetime
Brushed Black Chrome	BBC	Chrome is chemically darkened then hand brushed and finished.	Electroplated	UNION	Limited Lifetime
Brushed Nickel	BN	A heavy coating of nickel is applied then hand-relieved to achieve a subtle, sophisticated texture.	Electroplated	UNION	Limited Lifetime
Bronze	ΒZ	A chemically darkened surface with copper undertones.	Powdercoated	Berea, Leyden, Taos	Limited Lifetime
Matte Black	MB	Polished to a smooth surface then a hard-wearing, durable finish with a matte appearance is applied.	Electroplated	MPRO	Limited Lifetime
Polished Chrome	PC	A hard-wearing, durable finish, highly polished with a slightly cool tone.	Electroplated	All	Limited Lifetime
Polished Nickel	PN	A durable, highly-polished finish with a warm tone.	PVD	All except UNION	Limited Lifetime
Satin Nickel	SN	Similar to brushed nickel but with a slight matte appearance. A heavy coating of nickel is applied then hand brushed to achieve a subtle, sophisticated texture.	PVD	Berea, Leyden, Darby, Taos	Limited Lifetime
Stainless	S or V	A finish designed to simulate stainless steel. Matte in appearance with a slightly warm tone.	PVD	Wisp, MPRO	Limited Lifetime
Unlacquered Brass	В	Raw brass is polished and left uncoated to naturally patina over time. A rich, living finish which can be left to gently tarnish or polished to restore its brilliance.	Living finish	UNION	No Warranty













BEREA 220



LEYDEN 244

UNION 11

WISP 137

WALDORF 41

BELGRAVIA 75

ARCADE 107











SHOWERING 321



TIT

BASINS 336

BATH FURNITURE 359

$\cap | | F$ ٧S R ()

MPRO 169

From the quintessentially British to the sleek and modern, we are proud to offer a range of exquisitely designed products to suit all bathroom requirements.



BASIN TRAPS 440 WASTES 442

ROUGHS 444





DARBY 270



TAOS 296





TOILETS 371



BATHTUBS 382



FINISHES 6 WARRANTY & DIRECTORY 460









Inspired by iconic industrial forms and renowned Italian artisanry, UNION sets a new standard for contemporary brassware engineering, style and performance. Each component is precision-machined, cast, polished and perfected to offer an elevated bathing experience. Born of innovation. Built to exceed expectation.

• NEW •

UNION





PRECISION BRASSWARE, CAST IN ITALY






AVAILABLE FINISHES



Polished Chrome



Brushed Nickel




Brushed Black Chrome



Unlacquered Brass

HANDLE OPTIONS

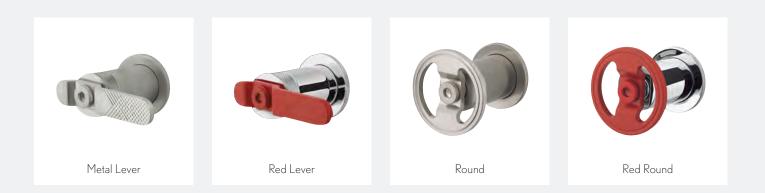

UNION


UNION SINGLE-HOLE BASIN FAUCET

Single-hole basin faucet with lever handle
Solid brass construction
Kerox ceramic disc cartridge
Push drain assembly included
Spout reach: 5-1/8"



Metal Lever Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN110DPC_LV US-UN110DPBN_LV US-UN110DPBBC_LV US-UN110DPB_LV

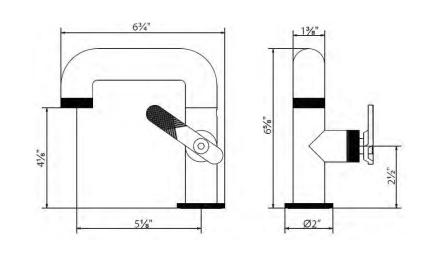



Red Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass US-UN110DPC_RLV US-UN110DPBN_RLV US-UN110DPBBC_RLV US-UN110DPB_RLV Basin faucets

UNION WALL-MOUNT SINGLE-HOLE BASIN FAUCET

Single-hole basin faucet with lever handle	
Solid brass construction	
Kerox ceramic disc cartridge	
Rough included	
Drain sold separately: US-BSW906/US-BSW0103	
Spout reach: 8"	
Spout swivel: No	




Metal Lever

Polished Chrome Brushed Nickel Unlacquered Brass

US-UN111WNC_LV US-UN111WNBN_LV Brushed Black Chrome US-UN111WNBBC_LV US-UN111WNB_LV

Red Lever

Polished Chrome US-UN111WNC_RLV Brushed Nickel US-UN111WNBN_RLV Brushed Black Chrome US-UN111WNBBC_RLV Unlacquered Brass US-UN111WNB_RLV

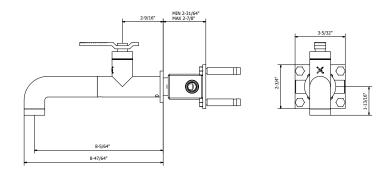



US-BSW0103C Polished Chrome

US-BSW906BN Brushed Nickel

US-BSW906BBC Brushed Black Chrome

US-BSW906B Unlacquered Brass

See page 440 for detailed information

UNION VESSEL FAUCET


Solid brass construction	
Kerox ceramic disc cartridge	
Drain sold separately: US-BSW906/US-BSW0103	
Spout reach: 6-1/4"	
Spout swivel: Yes	



Metal Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN112DNC_LV US-UN112DNBN_LV US-UN112DNBBC_LV US-UN112DNB_LV



14



RECOMMENDED WASTES

Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW906BN Brushed Nickel

US-BSW906BBC Brushed Black Chrome

US-BSW906B Unlacquered Brass

See page 440 for detailed information



Red Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN112DNC_RLV US-UN112DNBN_RLV US-UN112DNBBC_RLV US-UN112DNB_RLV

ROUGH

Rough for three-hole wall-

RECOMMENDED WASTES Basin push drain with overflow

mount basin faucet US-130ROUGH See page 444 for detailed information

US-BSW0103C

Polished Chrome

US-BSW906BN

US-BSW906BBC

Brushed Black Chrome

Brushed Nickel

US-BSW906B Unlacquered Brass See page 440 for detailed information

UNION WIDESPREAD BASIN FAUCET

Solid brass construction
-lühs quarter-turn ceramic disc cartridges
Push drain assembly included
Spout reach: 6-1/4"
Spout swivel: No





UNION WALL-MOUNT WIDESPREAD BASIN FAUCET TRIM

Trim for wall-mount basin faucet
Solid brass construction
Flühs quarter-turn ceramic disc cartridges
Required rough (sold separately): US-130ROUGH



Red Lever

Polished Chrome

Unlacquered Brass

Brushed Nickel



Metal Lever Polished Chrome US-UN131WNC_LV Brushed Nickel US-UN131WNBN_LV Brushed Black Chrome US-UN131WNBBC_LV Unlacquered Brass US-UN131WNB_LV



Round Handle

Polished Chrome Brushed Nickel Unlacquered Brass

US-UN131WNC_RND US-UN131WNBN RND Brushed Black Chrome US-UN131WNBBC_RND US-UN131WNB_RND

Red Round Handle

Polished Chrome US-UN131WNC_RR Brushed Nickel US-UN131WNBN RR Brushed Black Chrome US-UN131WNBBC_RR US-UN131WNB_RR Unlacquered Brass


US-UN131WNC_RLV

US-UN131WNBN_RLV


US-UN131WNB_RLV


Brushed Black Chrome US-UN131WNBBC_RLV

Round



Lever





Round Handle

Metal Lever

Polished Chrome

Brushed Nickel

Brushed Black Chrome

Unlacquered Brass

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN135DPC_RND US-UN135DPBN_RND US-UN135DPBBC_RND US-UN135DPB_RND


US-UN135DPC_LV

US-UN135DPBN_LV

US-UN135DPBBC_LV

US-UN135DPB LV

Round





Red Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass


US-UN135DPC_RLV US-UN135DPBN_RLV US-UN135DPBBC_RLV US-UN135DPB_RLV



Red Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN135DPC_RR US-UN135DPBN_RR US-UN135DPBBC_RR US-UN135DPB_RR

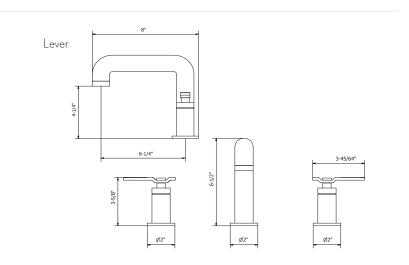

UNION FLOOR-MOUNT TUB FILLER

Dual-handle operation

Solid brass construction Flühs quarter-turn ceramic disc cartridges Single-function handshower with vacuum breaker

and 60" hose Spout reach: 9"

Required rough (sold separately): US-399ROUGH



Metal Lever

Polished Chrome Brushed Nickel Unlacquered Brass

US-UN399TFC_LV US-UN399TFBN_LV Brushed Black Chrome US-UN399TFBBC_LV US-UN399TFB_LV



Red Lever

Polished Chrome Brushed Nickel Unlacquered Brass





Red Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UN399TFC_RR US-UN399TFBN_RR US-UN399TFBBC_RR US-UN399TFB_RR

Height to spout: 32-1/2" Spout swivel: Yes Tub filler flow rate: 10GPM at 45PSI Handshower flow rate: 1.75 GPM Optional floor plate (sold separately) US-UNPLATE



Round Handle Polished Chrome

Brushed Nickel

US-UN399TFC_RND US-UN399TFBN_RND Brushed Black Chrome US-UN399TFBBC_RND Unlacquered Brass US-UN399TFB_RND


REQUIRED ROUGH




Rough for floor-mount tub filler

US-399ROUGH

See page 445 for detailed information






UNION FLOOR PLATE FOR FREESTANDING TUB FILLER

Optional floor plate for use with Union freestanding tub filler Size: 16-3/8" x 6"

Polished Chrome US-UNPLATEC Brushed Nickel **US-UNPLATEBN** Brushed Black Chrome US-UNPLATEBBC Unlacquered Brass US-UNPLATEB







Two water outlets

control cartridge

thermal shock

US-WLBP1500R

cross flow

UNION 1000 THERMOSTATIC VALVE TRIM

One water outlet

Vernet thermostatic cartridge and Flühs flow control cartridge

Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or thermal shock

Integral shut-off return valve with filters to prevent cross flow

Required rough (sold separately): US-WLBP1000R

Flow rate: 12GPM at 60 PSI



Round/Lever Polished Chrome Brushed Nickel

Round/Round

Polished Chrome

Brushed Nickel

Unlacquered Brass

US-UNTH2HC_LVRND US-UNTH2HBN_LVRND Brushed Black Chrome **US-UNTH2HBBC_LVRND** Unlacquered Brass US-UNTH2HB_LVRND

US-UNTH2HC RND

US-UNTH2HB_RND

Brushed Black Chrome US-UNTH2HBBC_RND

US-UNTH2HBN_RND



Red Round/Lever Polished Chrome ushed Nickel Unlacquered Brass

US-UNTH2HC_RLVRR US-UNTH2HBN_RLVRR shed Black Chrome US-UNTH2HBBC_RLVRR



Unlacquered Brass

MAX 3-11/32" MIN 2-5/32"

Red Round/Round Polished Chrome US-UNTH2HC RR US-UNTH2HBN RR Brushed Nickel Brushed Black Chrome **US-UNTH2HBBC_RR** US-UNTH2HB_RR



Round/Round

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

UNION 1500 THERMOSTATIC VALVE TRIM

Vernet thermostatic cartridge and Flühs flow

Cartridge restricts water supply should the hot

Integral shut-off return valve with filters to prevent

Round/Lever

Polished Chrome

Brushed Black Chrome

Unlacquered Brass

Brushed Nickel

or cold supply fail, to prevent scalding or

Required rough (sold separately):

Flow rate: 11GPM at 60 PSI

US-UNTH2HC RND US-UNTH2HBN_RND US-UNTH2HBBC_RND US-UNTH2HB_RND

US-UNTH2HC_LVRND


US-UNTH2HBN_LVRND


US-UNTH2HBBC_LVRND

US-UNTH2HB_LVRND

Round


20









Lever









REQUIRED ROUGH



1000 3/4" thermostatic rough with single integrated volume control

US-WLBP1000R

See page 446 for detailed information

US-UNTH2HB_RLVRR





REQUIRED ROUGH



1500 3/4" thermostatic rough with integrated volume control/ diverter for independent twooutlet use

US-WLBP1500R

See page 446 for detailed information



Red Round/Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTH2HC_RLVRR US-UNTH2HBN_RLVRR US-UNTH2HBBC_RLVRR US-UNTH2HB_RLVRR





Red Round/Round

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTH2HC RR US-UNTH2HBN_RR US-UNTH2HBBC_RR US-UNTH2HB_RR







Three water outlets

control cartridge

thermal shock

US-WLBP2500R

cross flow

UNION 2500 THERMOSTATIC VALVE TRIM

Vernet thermostatic cartridge and Flühs flow

Cartridge restricts water supply should the hot

Integral shut-off return valve with filters to prevent

or cold supply fail, to prevent scalding or

Required rough (sold separately):

Flow rate: 12 GPM at 60 PSI

UNION 2000 THERMOSTATIC VALVE TRIM

Two water outlets

Vernet thermostatic cartridge and Flühs flow control cartridge

Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or thermal shock

Integral shut-off return valve with filters to prevent cross flow

Required rough (sold separately): US-WLBP2000R

Flow rate: 13GPM at 60 PSI



Lever/Round/Lever

US-UNTH3HC_LV Polished Chrome US-UNTH3HBN_LV Brushed Nickel US-UNTH3HBBC_LV Brushed Black Chrome Unlacquered Brass US-UNTH3HB_LV



Round

Round/Round/Round

Polished Chrome US-UNTH3HC_RND US-UNTH3HBN_RND Brushed Nickel Brushed Black Chrome US-UNTH3HBBC_RND US-UNTH3HB_RND Unlacquered Brass

REQUIRED ROUGH



2000 3/4" thermostatic rough with two integrated volume controls

US-WLBP2000R

See page 447 for detailed information


Red Lever/Round/Lever

Polished Chrome Brushed Nickel Unlacquered Brass

US-UNTH3HC_RLV US-UNTH3HBN RLV Brushed Black Chrome US-UNTH3HBBC_RLV US-UNTH3HB_RLV

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

Red Round/Round/Round US-UNTH3HC_RR US-UNTH3HBN_RR US-UNTH3HBBC_RR US-UNTH3HB_RR

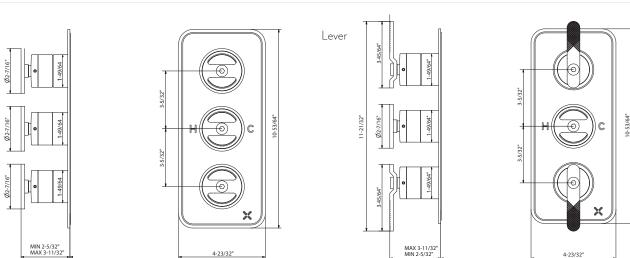

Round


Round/Round

Polished Chrome


Unlacquered Brass

Brushed Nickel

Brushed Black Chrome US-UNTH2HBBC_RND US-UNTH2HB_RND



MAX 3-11/32" MIN 2-5/32"





US-UNTH2HC_RND US-UNTH2HBN RND

REQUIRED ROUGH



2500 3/4" thermostatic rough with single integrated volume control/three-way diverter

US-WLBP2500R

See page 448 for detailed information



Red Round/Round

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTH2HC_RR US-UNTH2HBN RR US-UNTH2HBBC_RR US-UNTH2HB_RR

UNION 3000 THERMOSTATIC VALVE TRIM

Three water outlets

Vernet thermostatic cartridge and Flühs flow control cartridge

Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or thermal shock

Integral shut-off return valve with filters to prevent cross flow
Required rough (sold separately): US-WLBP3000R
Flow rate: 12 GPM at 60 PSI



3000 3/4" thermostatic rough with integrated volume control and volume control/two-way diverter

US-WLBP3000R

See page 448 for detailed information

Lever/Round/Lever Polished Chrome US-UNTH3HC LV US-UNTH3HBN_LV Brushed Nickel Brushed Black Chrome US-UNTH3HBBC_LV US-UNTH3HB_LV Unlacquered Brass



Red Lever/Round/Lever

Polished Chrome Brushed Nickel Unlacquered Brass

US-UNTH3HC_RLV US-UNTH3HBN RLV Brushed Black Chrome US-UNTH3HBBC_RLV US-UNTH3HB_RLV


Round/Round/Round

Polished Chrome US-UNTH3HC_RND US-UNTH3HBN_RND Brushed Nickel Brushed Black Chrome US-UNTH3HBBC RND US-UNTH3HB_RND Unlacquered Brass

Red Round/Round/Round Polished Chrome Brushed Nickel



US-UNTH3HC_RR US-UNTH3HBN_RR Brushed Black Chrome **US-UNTH3HBBC RR** US-UNTH3HB_RR

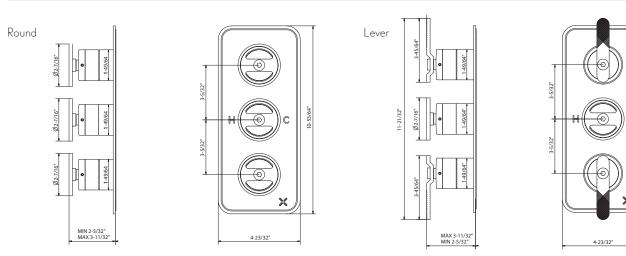

UNION THERMOSTATIC VALVE TRIM

Temperature control only; volume control(s) sold separately
Vernet thermostatic cartridge
Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or



thermal shock

Metal Lever Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTHC_LV US-UNTHBN_LV US-UNTHBBC_LV US-UNTHB_LV





Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTHC_RND US-UNTHBN_RND US-UNTHBBC_RND US-UNTHB_RND

Round





24

Integral shut-off return valve with filters to prevent

Required rough (sold separately): TH-RGH Flow rate: 10-12 GPM at 45 PSI

cross flow



3/4" thermostatic rough

TH-RGH

ROUGH

See page 450 for detailed information



Red Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTHC_RLV US-UNTHBN_RLV US-UNTHBBC_RLV US-UNTHB_RLV




Red Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNTHC_RR US-UNTHBN RR US-UNTHBBC_RR US-UNTHB_RR

Lever





One water outlet

cold supply

UNION VOLUME CONTROL AND DIVERTER TRIM

Volume control controls on/off and volume functions for a single component in a shower system

Diverter alternates water flow between two or three water outlets



Metal Lever Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass



Round Handle

Round

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNVCDIVC_RND US-UNVCDIVBN_RND US-UNVCDIVBBC_RND US-UNVCDIVB_RND

US-UNVCDIVC LV

US-UNVCDIVBN_LV

US-UNVCDIVBBC_LV

US-UNVCDIVB_LV

Flühs quarter-turn ceramic disc cartridge Required rough (sold separately): VC-RGH - Volume control DIV-RGH - two-way diverter 3DV-RGH - three-way diverter



Red Lever Polished Chrome Brushed Nickel

Brushed Black Chrome Unlacquered Brass



Red Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNVCDIVC_RR US-UNVCDIVBN_RR US-UNVCDIVBBC_RR US-UNVCDIVB_RR

for detailed information

Kerox pressure-balance cartridge

Pressure-balance cartridge maintains constant

temperature in response to changes to hot and

UNION PRESSURE-BALANCE VALVE TRIM



Metal Lever Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNPBSC_LV US-UNPBSBN_LV US-UNPBSBBC_LV US-UNPBSB_LV




Round Handle Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass


Round


US-UNPBSC_RND US-UNPBSBN RND US-UNPBSBBC_RND US-UNPBSB RND

2-3/32"









REQUIRED ROUGH Volume control rough VC-RGH Two-way diverter rough DIV-RGH Three-way diverter rough 3DV-RGH See pages 452-453

US-UNVCDIVC RLV US-UNVCDIVBN_RLV US-UNVCDIVBBC_RLV US-UNVCDIVB_RLV

Required rough (sold separately): PBS-RGH Flow rate: 3-5 GPM at 45 PSI Extension kit: 5T1C0319NT. 5P0C0582NT

REQUIRED ROUGH



Pressure-balance rough

PBS-RGH

See page 453 for detailed information



Red Lever

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNPBSC_RLV US-UNPBSBN_RLV US-UNPBSBBC_RLV US-UNPBSB_RLV




Red Round Handle

Polished Chrome Brushed Nickel Brushed Black Chrome Unlacquered Brass

US-UNPBSC_RR US-UNPBSBN RR US-UNPBSBBC_RR US-UNPBSB RR

Lever





UNION EXPOSED THERMOSTATIC SHOWER SET WITH RAIN HEAD AND HANDSHOWER

One round handle, one lever handle	
Available with 5-5/8" shower head (1.75 GPM) o 10" shower head (2.0 GPM)	or
Solid brass construction	
Vernet thermostatic cartridge and Flühs flow control ceramic disc cartridges	
Shower head features EasyClean nozzles	
Single-function handshower with vacuum breaker and 60" hose	r
Height: 41-3/4"	
Projection: 21-5/8"	
Maximum shower head flow rate: 1.75GPM or 2.0GPM	
Maximum handshower flow rate: 1.75 GPM	
Inlet connection size: 1/2"	
Inlet connection type: Straight pipe with compression fitting	
Inlet supply spread: 5-5/8" to 6-1/4"	
Shower head swivel: Yes	

Metal Round/Lever (with 1.75GPM shower head) Polished Chrome US-UN800C

Polished Chrome	03-010800C
Brushed Nickel	US-UN800BN
Brushed Black Chrome	US-UN800BBC
Unlacquered Brass	US-UN800B

Metal Round/Lever (with 2.00GPM shower head)

Polished Chrome	US-UN820C
Brushed Nickel	US-UN820BN
Brushed Black Chrome	US-UN820BBC
Unlacquered Brass	US-UN820B

Red Round/Lever (with 1.75GPM shower head)

Polished Chrome	US-UN800C_R
Brushed Nickel	US-UN800BN_R
Brushed Black Chrome	US-UN800BBC_R
Unlacquered Brass	US-UN800B_R

Red Round/Lever (with 2.00GPM shower head)

US-UN820C_R
US-UN820BN_R
US-UN820BBC_R
US-UN820B_R



He






UNION 10" SHOWER HEAD

Solid brass Single rain spray EasyClean anti-limescale nozzles Shower arm and flange sold separately (US-SH400) 9-7/8" diameter Maximum flow rate: 2.0 GPM Inlet connection size: G 1/2" (compatible with 1/2" NPT) Swivel: Yes Polished ChromeUS-MA250CBrushed NickelUS-MA250BNBrushed Black ChromeUS-MA250BBCUnlacquered BrassUS-MA250B





1/2-14NPT

ø3-1/2"

UNION 5-5/8" SHOWER HEAD



ELEMENTS 8-JET SHOWER HEAD

Solid brass Adjustable spray - wide to narrow rain Anti-limescale nozzles Wall-mounted using shower arm (sold separately) 3-1/2" diameter Swivel: Yes Maximum flow rate: 1.75 GPM Inlet connection type: 1/2" NPT



US-SH08C

US-SH08N

US-SH08S

US-SH08BN*

Polished Chrome

Polished Nickel

Brushed Nickel

Stainless



UNION 15-3/4" WALL-MOUNT SHOWER ARM AND FLANGE

Solid Brass	Polished Chrome	US-S
Projection: 15-3/4"	Brushed Nickel	US-S
nlet connection size: 1/2" male NPT	Brushed Black Chrome	US-S
	Unlacquered Brass	US-S

MODERN SHOWER ARM AND FLANGE

Solid brass	Polished Chrome	US-F
Round flange	Polished Nickel	US-F
Projection: 5-3/4"	Stainless	US-F
Inlet connection type: 1/2" male NPT	Brushed Nickel	US-F
	Brushed Black Chrome	US-F


UNION HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray	Polished Chrome	US-L
Wall bracket includes vacuum breaker	Brushed Nickel	US-L
Handshower hose length: 60"	Brushed Black Chrome	US-L
Flange size: 2"	Unlacquered Brass	03-0
Maximum flow rate: 1.75 GPM		
Inlet connection: 1/2" NPT		

UNION WALL TUB SPOUT

Solid brass construction	Polished Chrome L	JS
Spout reach: 9"	Brushed Nickel L	JS
	Brushed Black Chrome L	JS
	Unlacquered Brass L	JS

*6-WEEK LEADTIME

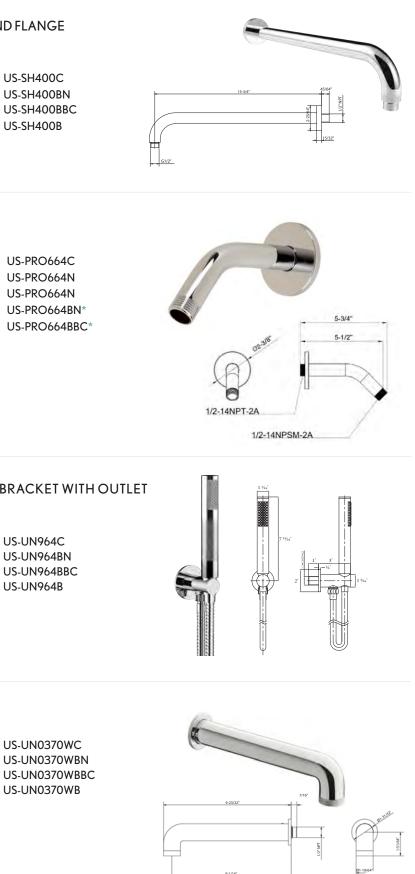


Accessories

UNION

UNION PAPER HOLDER


Polished Chrome US-UN029C Brushed Nickel US-UN029BN Brushed Black Chrome US-UN029BBC Unlacquered Brass US-UN029B





Polished Chrome	US-UN013C
Brushed Nickel	US-UN013BN
Brushed Black Chrome	US-UN013BBC
Unlacquered Brass	US-UN013B


Note: Bar cannot be cut

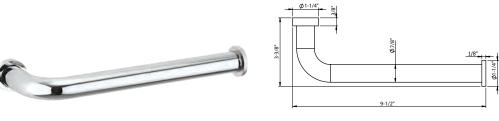

UNION ROBE HOOK

Polished Chrome US-UN022C Brushed Nickel US-UN022BN Brushed Black Chrome US-UN022BBC Unlacquered Brass US-UN022B





1/8"_

UNION 20" TOWEL BAR

Polished Chrome	US-UN023C
Brushed Nickel	US-UN023BN
Brushed Black Chrome	US-UN023BBC
Unlacquered Brass	US-UN023B

Note: Bar cannot be cut




UNION WALL-MOUNT TOILET BRUSH HOLDER


Polished Chrome	US-UN025C
Brushed Nickel	US-UN025BN
Brushed Black Chrome	US-UN025BBC
Unlacquered Brass	US-UN025B


UNION WALL-MOUNT SOAP DISPENSER

US-UN011C

Polished Chrome Brushed Nickel US-UN011BN Brushed Black Chrome US-UN011BBC US-UN011B Unlacquered Brass



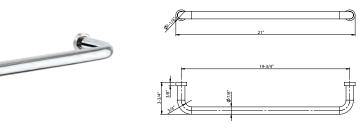

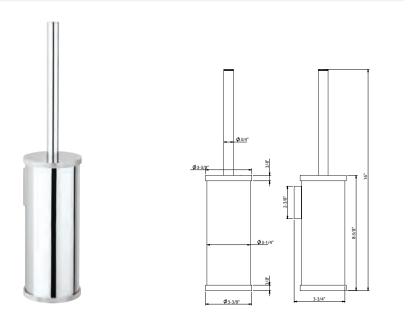



UNION single-hole basin faucet with red leve handle in Polished Chrome (US-UN110DPC_RLV















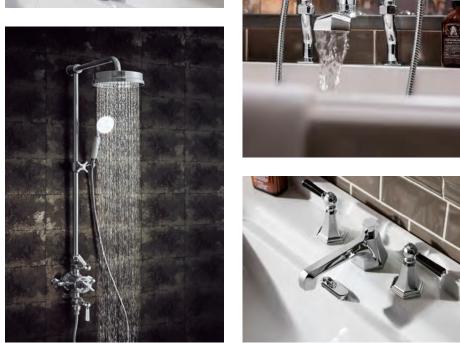

A modern interpretation of Art Deco excellence, Waldorf blends geometric intricacy with softened lines for a striking profile. Expertly designed in Europe and displaying the highest level of quality and aesthetics, the Waldorf collection represents the ultimate in bathroom luxury. Enduring. Elegant. Waldorf.



TRULY EVOCATIVE

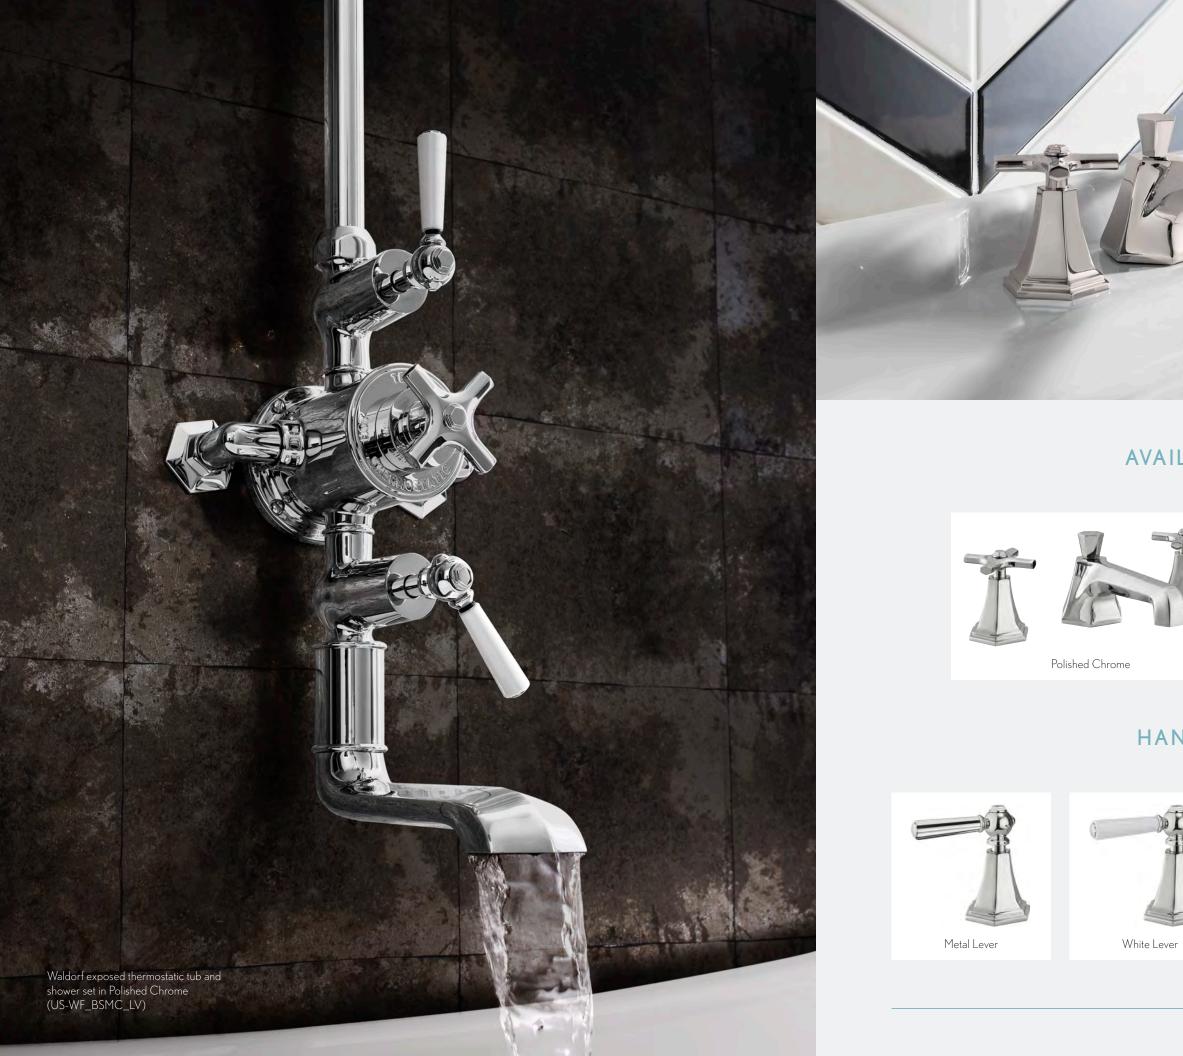




AVAILABLE FINISHES



Polished Nickel

HANDLE OPTIONS

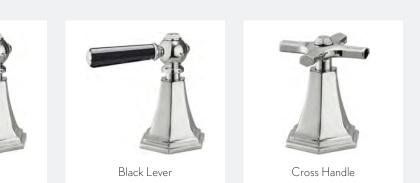

Basin faucets

WALDORF

WALDORF LOW SPOUT WIDESPREAD BASIN FAUCET

Solid brass construction Flühs quarter-turn ceramic disc valves Pop-up drain assembly included Spout reach: 5-1/2"

Spout swivel: No	
Handle spread: 5" - 22"	
Maximum flow rate: 1.2 GPM	



Crosshead Polished Chrome US-WF130DPC Polished Nickel US-WF130DPN





Metal Lever Polished Chrome US-WF130DPC_CLV Polished Nickel US-WF130DPN_NLV






Black Lever Polished Chrome US-WF130DPC_BLV Polished Nickel US-WF130DPN_BLV



White Lever Polished Chrome US-WF130DPC_LV US-WF130DPN_LV Polished Nickel

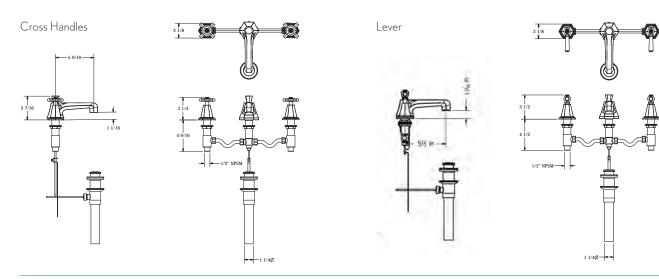

WALDORF TALL SPOUT WIDESPREAD BASIN FAUCET

Solid brass construction	Spout swi
Flühs quarter-turn ceramic disc valves	Handle sp
Pop-up drain assembly included	Maximum
Spout reach: 5-1/4"	








Crosshead Polished Chrome US-WF135DPC Polished Nickel US-WF135DPN



Black Lever Polished Chrome US-WF135DPC_BLV Polished Nickel US-WF135DPN_BLV



vivel: No spread: 5″ - 22″ im flow rate: 1.2 GPM



Metal Lever Polished Chrome Polished Nickel


US-WF135DPC_CLV US-WF135DPN_NLV





White Lever Polished Nickel

Polished Chrome US-WF135DPC_LV US-WF135DPN_LV

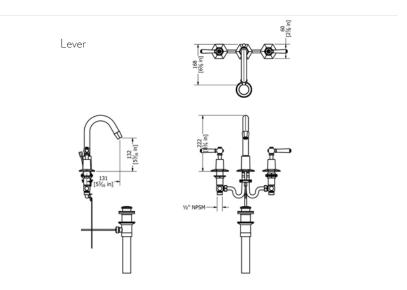

WALDORF WALL-MOUNT BASIN FAUCET TRIM

Solid brass construction
Flühs quarter-turn ceramic disc valves
Push drain assembly sold separately
Required rough sold separately (US-130ROUGH)

Spout reach: 5-1/2"	
Spout swivel: No	
Handle spread: 8"	
Maximum flow rate: 1.	2 GPM



Crosshead Polished Chrome US-WF131WNC Polished Nickel







US-WF131WNC_CLV Polished Nickel US-WF131WNN_NLV



Black Lever Polished Chrome US-WF131WNC BLV US-WF131WNN_BLV Polished Nickel




White Lever Polished Chrome US-WF131WNC LV Polished Nickel US-WF131WNN_LV




See page 440

Cross Handles





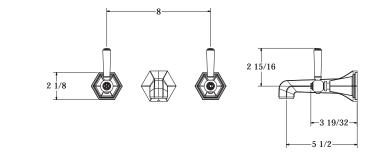

REQUIRED ROUGH



Rough for three-hole wallmount basin faucet

US-130ROUGH

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel



Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

for detailed information

WALDORF SINGLE-HOLE BASIN FAUCET

Solid brass construction	Spout reach: 5-1/4'	
Flühs quarter-turn ceramic disc valves	Spout swivel: No	
Pop-up drain assembly included	Maximum flow rate	



Polished Chrome US-WF110DPC

US-WF110DPN

Crosshead


Polished Nickel





Black Lever Polished Chrome US-WF110DPC BLV Polished Nickel US-WF110DPN_BLV

Cross Handles



4"

te: 1.2 GPM

Metal Lever Polished Nickel


Polished Chrome US-WF110DPC_CLV US-WF110DPN_NLV



White Lever

Polished Nickel

Polished Chrome US-WF110DPC LV US-WF110DPN_LV



Tub faucets

WALDORF EXPOSED DECK-MOUNT TUB FAUCET WITH HANDSHOWER

Solid brass construction

Flühs quarter-turn ceramic disc valves

Single-function handshower with vacuum breaker and 60″ hose

Can be used for floorstanding installation with US-WF002F floor pillar legs, US-AA002ROUGH rough and US-WF_PLATE floor plate



Crosshead Polished Chrome US-WF422DC Polished Nickel US-WF422DN



Black Lever Polished Chrome US-WF422DC_BLV Polished Nickel US-WF422DN_BLV Wall unions US-BL004WC/N are compatible with this tub faucet. Please see page 48. Spout reach: 7-5/8" Spout swivel: No Tub filler flow rate: 25 GPM at 45 PSI Handshower flow rate: 2.0 GPM Inlet supply: 3/4" NPSM connectors




Metal Lever Polished Chrome US-WF422DC_CLV US-WF422DN_NLV Polished Nickel




White Lever Polished Chrome US-WF422DC_LV Polished Nickel US-WF422DN_LV

Cross Handles



Lever





US-WF422D

Height: 27-5/8"

Polished Nickel

legs US-WF002F Size: 11-3/4" x 6-3/4"

Polished Nickel

(OPTIONAL)

Polished Nickel

Solid brass

3/4" NPT

Polished Nickel

Solid brass construction

(US-WF_PLATE) sold separately

Polished Chrome US-WF002FC

Polished Chrome US-WF_PLATE

Polished Chrome US-PLS002C

Polished Chrome US-BL004WC

WALDORF FLOOR-STANDING PILLAR LEGS

Floor-mounting legs for Waldorf deck tub filler

Required rough (US-AA002ROUGH) and plate

Floor plate for use with Waldorf freestanding pillar

US-WF002FN

WALDORF FLOOR PLATE FOR PILLAR LEGS

US-WF_PLATEN

US-PLS002N

WALL UNIONS FOR EXPOSED TUB FILLER

US-BL004WN

Wall mounting unions for two-handle tub faucets

REQUIRED ROUGH

WALDORF EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD

Integrated volume control	Maximum showe	
Vernet thermostatic cartridge and Flühs volume	PSI	
control cartridge	Shower head swi	
Shower head features EasyClean nozzles	Inlet connection s	
Plug at bottom of the valve is removable for future addition of handshower or tub spout, if desired	Inlet connection t compression fittin	



Metal Lever Polished Chrome US-WF_SHOWERC_CLV Polished Nickel US-WF_SHOWERN_NLV




Black Lever Polished Chrome Polished Nickel

US-WF_SHOWERC_BLV US-WF_SHOWERN_BLV



White Lever Polished Chrome US-WF_SHOWERC_LV Polished Nickel US-WF_SHOWERN_LV

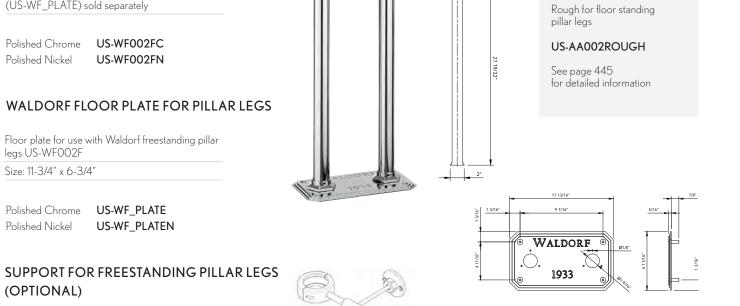


FD |

WALDORF WALL TUB SPOUT

Solid brass construction
Spout reach: 7-1/2"
nlet supply: 1/2" NPT

Polished Chrome Polished Nickel US-WF0370WN







3¹/8″

7%16 in

6% in





50

er head flow rate: 2.5 GPM at 80

vivel: No

size: 1/2"

type: Straight pipe with ing





WALDORF EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND TUB SPOUT

	Two integrated volume controls
	Vernet thermostatic cartridge and Flühs volume control cartridge
	Shower head features EasyClean nozzles
	Maximum shower head flow rate: 2.5 GPM at 80 PSI

Shower head swivel: No
Inlet connection size: 1/2"
Inlet connection type: Straight pipe with compression fitting



Metal Lever Polished Chrome US-WF_BSMC_CLV US-WF_BSMN_NLV Polished Nickel



Black Lever Polished Nickel

Polished Chrome US-WF_BSMC_BLV US-WF_BSMN_BLV






White Lever Polished Chrome US-WF BSMC LV Polished Nickel

US-WF_BSMN_LV







WALDORF EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND HANDSHOWER ON HOOK

Two integrated volume controls	Maximum hands	
Vernet thermostatic cartridge and Flühs volume	Shower head s	
control cartridges	Inlet connection	
Shower head features EasyClean nozzles	Inlet connection t	
Handshower includes vacuum breaker and 60" hose		
Maximum shower head flow rate: 2.5 GPM at 80 PSI		



Metal Lever (metal hand shower) Polished Chrome US-WF_BRACKETC_CLV Polished Nickel US-WF_BRACKETN_NLV



Black Lever (metal hand shower with black insert) Polished Chrome US-WF_BRACKETC_BLV Polished Nickel US-WF_BRACKETN_BLV



White Lever (metal hand shower with white insert) Polished Chrome US-WF_BRACKETC_LV Polished Nickel US-WF_BRACKETN_LV


dshower flow rate: 2.0 GPM at 80 PSI

swivel: No

on size: 1/2″

n type: Straight pipe with compression fitting



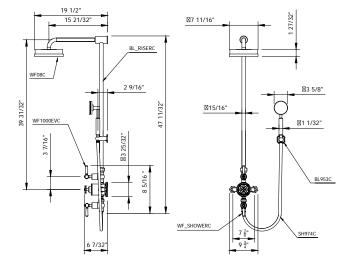

WALDORF EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND HANDSHOWER ON CRADLE

Inlet connection type: Straight pipe with

Shower head swivel: No

Inlet connection size: 1/2"

compression fitting

Maximum handshower flow rate: 2.0 GPM at 80 PSI

Two integrated volume controls
Vernet thermostatic cartridge and Flühs volume control cartridges
Shower head features EasyClean nozzles
Handshower includes vacuum breaker and 60" hose
Maximum shower head flow rate: 2.5 GPM at 80 PS



Metal Lever (metal hand shower) Polished Chrome US-WF_CRADLEC_CLV Polished Nickel US-WF_CRADLEN_NLV




Black Lever (metal hand shower with black insert) Polished Chrome US-WF_CRADLEC_BLV US-WF_CRADLEN_BLV Polished Nickel



White Lever (metal hand shower with white insert) Polished Chrome US-WF_CRADLEC_LV Polished Nickel US-WF_CRADLEN_LV



un 3



WALDORF THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND HANDSHOWER ON SLIDER

Two integrated volume controls	Maximum handsł	
Vernet thermostatic cartridge and Flühs volume	Shower head sw	
control cartridges	Inlet connection	
Shower head features EasyClean nozzles	Inlet connection	
Handshower includes vacuum breaker and 60" hose		
Maximum shower head flow rate: 2.5 GPM at 80 PSI		



Metal Lever (metal hand shower) Polished Chrome US-WF_SLIDERC_CLV Polished Nickel US-WF_SLIDERN_NLV



Black Lever (metal hand shower with black insert) Polished Chrome US-WF_SLIDERC_BLV Polished Nickel US-WF_SLIDERN_BLV




White Lever (metal hand shower with white insert) Polished Chrome US-WF SLIDERC LV

Polished Nickel US-WF_SLIDERN_LV shower flow rate: 2.0 GPM at 80 PSI

wivel: No

n size: 1/2"

n type: Straight pipe with ting

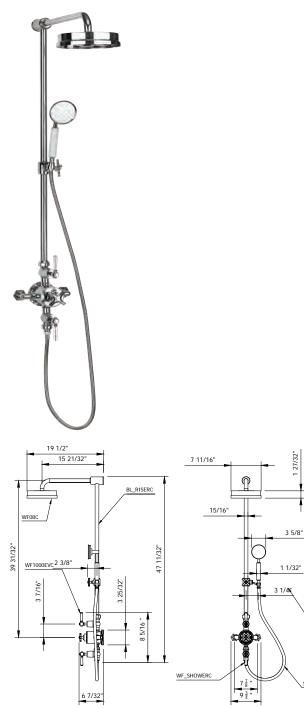

3 5/8"

BL953C

Two water outlets

US-WLBP1500R

Vernet thermostatic cartridge

Required rough (sold separately)

WALDORF 1000 THERMOSTATIC VALVE TRIM

One water outlet

Vernet thermostatic cartridge Required rough (sold separately) US-WLBP1000R



Crosshead Polished Chrome US-WF1000RC US-WF1000RN Polished Nickel



Black Lever Polished Nickel

Polished Chrome US-WF1000RC_BLV US-WF1000RN_BLV Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel

Flow rate: 12 GPM at 60 PSI



Metal Lever Polished Chrome US-WF1000RC_CLV Polished Nickel US-WF1000RN_NLV



White Lever Polished Chrome US-WF1000RC_LV Polished Nickel US-WF1000RN_LV

REQUIRED ROUGH



1000 3/4" thermostatic rough with single integrated volume control

US-WLBP1000R

See page 446 for detailed information

Crosshead

Polished Chrome US-WF1500RC Polished Nickel US-WF1500RN


WALDORF 1500 THERMOSTATIC VALVE TRIM




Black Lever Polished Chrome Polished Nickel

US-WF1500RC_BLV US-WF1500RN_BLV


Cross Handles



Lever



Cross Handles



Flow rate: 11 GPM at 60 PSI

Extension kit:

US-EK101525C Polished Chrome US-EK101525N Polished Nickel




Metal Lever Polished Chrome Polished Nickel

US-WF1500RC_CLV US-WF1500RN_NLV



White Lever Polished Chrome Polished Nickel

US-WF1500RC_LV US-WF1500RN_LV



REQUIRED ROUGH



1500 3/4" thermostatic rough with single integrated volume control/diverter for independent two outlet use

US-WLBP1500R

See page 446 for detailed information **REQUIRED ROUGH**

2000 3/4" thermostatic rough

with two integrated volume

controls

US-WLBP2000R

See page 447 for detailed information

WALDORF 2000 THERMOSTATIC VALVE TRIM

Two water outlets Vernet thermostatic cartridge Required rough (sold separately) US-WLBP2000R



Crosshead Polished Chrome US-WF2000RC Polished Nickel

US-WF2000RN



Black Lever Polished Chrome US-WF2000RC_BLV US-WF2000RN_BLV Polished Nickel


Flow rate: 13 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel



Metal Lever Polished Chrome US-WF2000RC_CLV US-WF2000RN_NLV Polished Nickel



White Lever Polished Chrome US-WF2000RC_LV Polished Nickel US-WF2000RN_LV

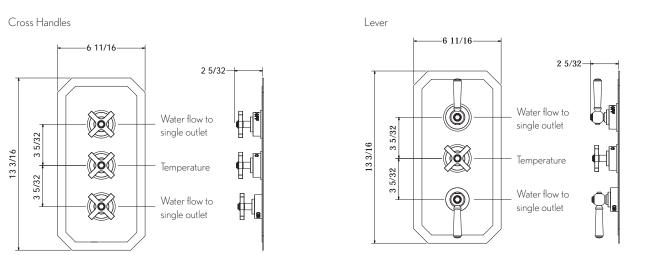

WALDORF 2500 THERMOSTATIC VALVE TRIM




Three water outlets

Required rough (sold separately) US-WLBP2500R

Extension kit:

Polished Nickel

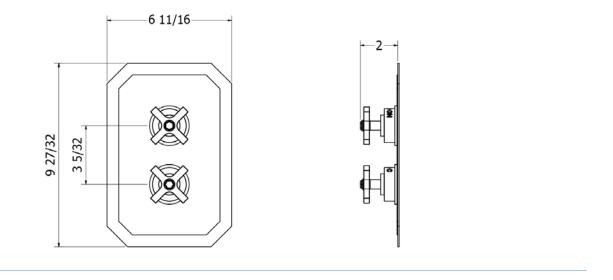

Vernet thermostatic cartridge

Flow rate: 12 GPM at 60 PSI

US-EK101525C Polished Chrome UK-EK101525N Polished Nickel

Polished Chrome US-WF2500RC US-WF2500RN

REQUIRED ROUGH



2500 3/4" thermostatic rough with single integrated volume control/three-way diverter

US-WLBP2500R

See page 448 for detailed information

Single spray

Wall bracket includes vacuum breaker

Handshower hose length: 60"

Flange size: 2-1/8" x 2-1/8"

WALDORF 3000 THERMOSTATIC VALVE TRIM

Three water outlets Vernet thermostatic cartridge and Flühs volume control cartridge Required rough (sold separately) US-WLBP3000R



Crosshead Polished Chrome Polished Nickel



US-WF3000RC US-WF3000RN



Black Lever Polished Nickel


Polished Chrome US-WF3000RC BLV US-WF3000RN_BLV Flow rate: 12 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome UK-EK2000N Polished Nickel




Metal Lever Polished Chrome US-WF3000RC_CLV US-WF3000RN_NLV Polished Nickel



White Lever Polished Chrome US-WF3000RC_LV US-WF3000RN_LV Polished Nickel







with integrated volume control and volume control/two-way diverter

US-WLBP3000R

See page 448 for detailed information

REQUIRED ROUGH



3000 3/4" thermostatic rough

Metal

Polished Chrome US-WF964C Polished Nickel US-WF964N

Poli Poli

Ø3-9-



Metal with white insert Polished Chrome US-WF964C W Polished Nickel

US-WF964N_W




WALDORF HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Shower face size: 3-1/2" Maximum flow rate: 2.0 GPM Inlet connection: 1/2" NPT



Metal with black insert

lished Chrome	US-WF964C_	В
lished Nickel	US-WF964N_	В



Shower heads

WALDORF

TRADITIONAL 12" WALL-MOUNT SHOWER ARM

Projection: 11"	(-
Height: 3-5/8"	
Inlet connection size: 1/2" male NPT	

Polished Chrome US-BL684C Polished Nickel US-BL684N

8" CEILING-MOUNT SHOWER ARM

Solid brass
Projection: 7-3/4"
Inlet connection size: 1/2" male NPT

Polished Chrome US-PRO689C US-PRO689N Polished Nickel

WALDORF SHOWER ARM AND FLANGE

Solid brass		
Hexagonal flange		
Projection: 5-3/4"		
Inlet connection typ	pe: 1/2" male NPT	
Polished Chrome Polished Nickel	US-WF664C US-WF664N	

WALDORF 8" RAIN HEAD

	Solid brass
	Single rain spray
	EasyClean, anti-limescale nozzles
	Can be wall or ceiling mounted using the appropriate shower arm (sold separately)
	Swivel: No

Maximum flow rate: 2.5 GPM

Inlet connection size: G 1/2" (compatible with 1/2" NPT)


Polished Chrome US-WF08C_EC Polished Nickel US-WF08N_EC

WALDORF 12" RAIN HEAD

Solid brass

Swivel: No







Inlet connection size: G 1/2" (compatible with 1/2" NPT)


Polished Chrome	US-WF12C
Polished Nickel	US-WF12N


ELEMENTS 8-JET SHOWER HEAD


Solid brass	
Adjustable spray - wide to narrow rair	า
Anti-limescale nozzles	
Wall-mounted using shower arm (sold separately)	
3-1/2" diameter	
Swivel: Yes	
Maximum flow rate: 1.75 GPM	
Inlet connection type: 1/2" NPT	

Polished Chrome US-SH08C Polished Nickel US-SH08N





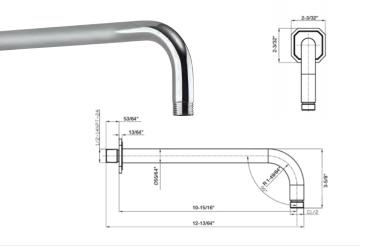






Accessories


WALDORF

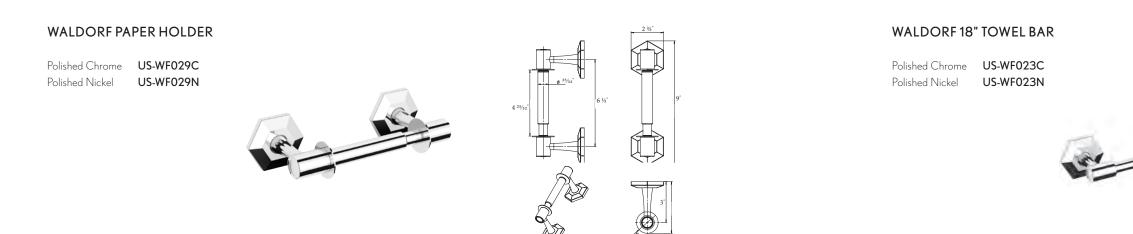

WALDORF ROBE HOOK


Polished Chrome US-WF021C Polished Nickel US-WF021N






WALDORF 24" TOWEL BAR

Polished Chrome US-WF026C Polished Nickel US-WF026N

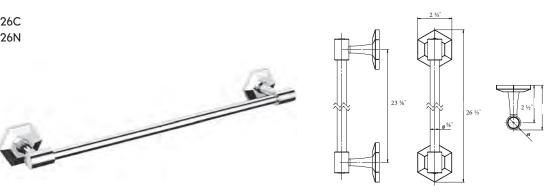


WALDORF TOWEL RING

Polished Chrome	US-WF013C
Polished Nickel	US-WF013N

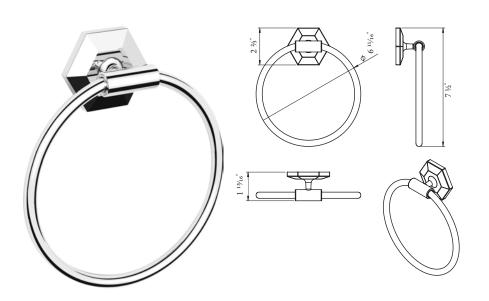


WALDORF 32" TOWEL BAR

Polished Chrome US-WF028C Polished Nickel US-WF028N

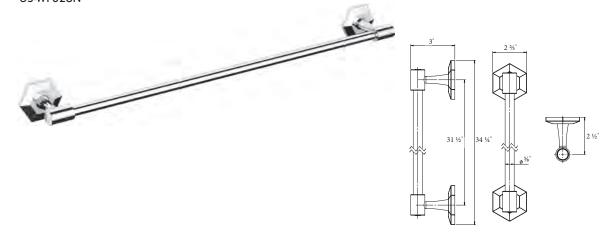



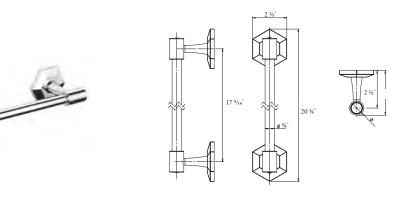


Mirrors

WALDORF LED LIGHTED MIRROR

Mirror back has safety film and edges are treated to prevent oxidization Size: 23-5/8" x 23-5/8" Installation method: Hardwire Brightness: 562 lumens Color temperature: 6400K cUL approved Note: Not compatible with dimmer

US-WF6060

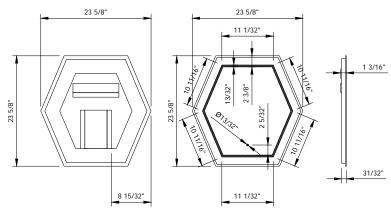




WALDORF MIRROR

Mirror back has safety film and edges are treated to prevent oxidization Size: 24-3/4" x 31-1/2"

US-WF_MIRROR







Waldorf back-to-walf bathtub (US-WF_BTWBATH) Waldorf exposed tub faucet with handshower and cross handles (US-WF422DC) Waldorf 31-1/2' basin console set in Polished Chrome (US-WF0813SCW) Waldorf widespread basin faucet with cross handles in Polished Chrome (US-WF130DPC) Waldorf LED hexagonal mirror (US-WF6060)

Waldorf 39-1/2" basin (UW-WF1003SCW) Waldorf widespread basin faucet with cross handles in Polished Chrome (WF130DPC) Contemporary bottle trap in Polished Chrome (US-BTR0402C) Waldorf mirror (US-WF_MIRROR) Coloring .


Waldorf widespread basin faucet with cross handles in Polished Chrome (US-WF130DPC)












Exceptionally crafted, Belgravia lends an historic pedigree to traditional bathroom design. Precise detailing and inscribed indices set this collection apart, creating a bathroom that is period in style yet superior in function. Hand-polished across the entire range, Belgravia indulges the bathroom with stately style and sensibility. Authentic luxury for discerning tastes. Belgravia.

cross handles in Polished Nickel (US-BL130DPN)

BELGRAVIA • EST. 1899 •

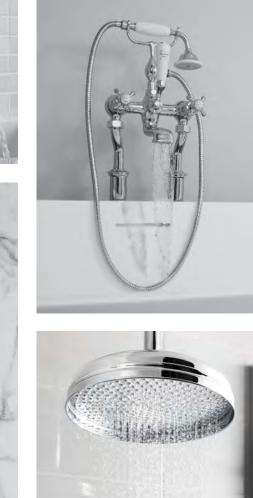

STUNNING & CLASSICALLY DESIGNED BRASSWARE









White Lever

Belgravia tall spout widespread basin faucet in Polished Nickel (US-BL135DPN)

AVAILABLE FINISHES

HANDLE OPTIONS

Basin faucets

BELGRAVIA

BELGRAVIA LOW SPOUT WIDESPREAD BASIN FAUCET

Solid brass construction	
Flühs quarter-turn ceramic disc valves	
Pop-up drain assembly included	
Spout reach: 4-1/2"	
Spout swivel: No	
Handle spread: 5" - 22"	
Maximum flow rate: 1.2 GPM	

BELGRAVIA TALL SPOUT WIDESPREAD BASIN FAUCET

Solid brass construction
Flühs quarter-turn ceramic disc valves
Pop-up drain assembly included
Spout reach: 5"
Spout swivel: No
Handle spread: 5" - 22"
Maximum flow rate: 1.2 GPM






Crosshead Polished Chrome US-BL130DPC Polished Nickel US-BL130DPN

ET)



White Lever Polished Chrome US-BL130DPC_LV US-BL130DPN_LV Polished Nickel

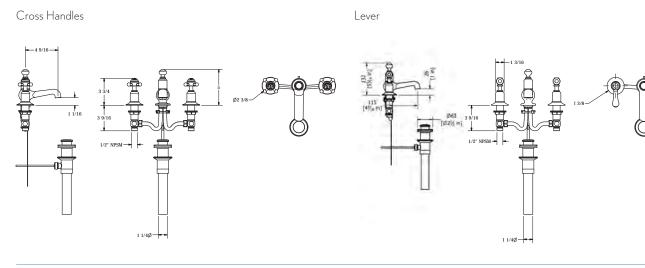


ar in AND DO

Crosshead Polished Chrome US-BL135DPC Polished Nickel

US-BL135DPN

Cross Handles

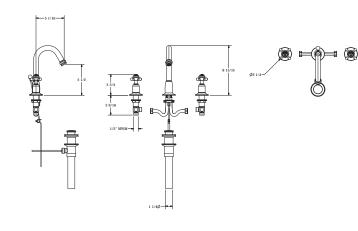




White Lever

Polished Nickel

Polished Chrome US-BL135DPC_LV US-BL135DPN_LV

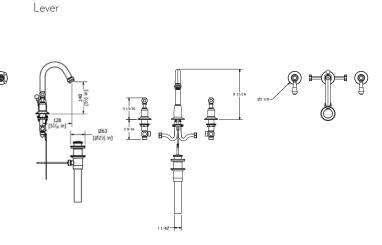

Basin faucets

BELGRAVIA WALL-MOUNT BASIN FAUCET TRIM

Trim for wall-mount basin faucet	
Solid brass construction	
Flühs quarter-turn ceramic disc valves	
Push drain assembly sold separately	
Required rough sold separately (US-130ROU	JGH)
Spout reach: 6"	
Spout swivel: No	
Handle spread: 8"	
Maximum flow rate: 1.2 GPM	






CrossheadPolished Chrome US-BL131WNC Polished Nickel


US-BL131WNN

White Lever Polished Chrome US-BL131WNC_LV Polished Nickel US-BL131WNN_LV

Cross Handles







REQUIRED ROUGH



Rough for three-hole wallmount basin faucet

US-130ROUGH

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel



Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

See page 440 for detailed information


BELGRAVIA SINGLE-HOLE BASIN FAUCET

Solid brass construction
Flühs quarter-turn ceramic disc valves
Pop-up drain assembly included
Spout reach: 5″
Spout swivel: No
Maximum flow rate: 1.2 GPM



Crosshead Polished Chrome US-BL112DPC Polished Nickel US-BL112DPN

Cross Handles






White Lever

Polished Nickel

Polished Chrome US-BL112DPC_LV US-BL112DPN_LV



Tub faucets

BELGRAVIA EXPOSED DECK-MOUNT TUB FAUCET WITH HANDSHOWER

Spout reach: 6-1/2" Spout swivel: No

Tub filler flow rate: 25 GPM at 45 PSI Handshower flow rate: 2.0 GPM Inlet supply: 3/4" NPSM connectors


Solid brass con	struction
Flühs quarter-tu	ırn ceramic disc valves
Single-function and 60" hose	handshower with vacuum breaker
	r floorstanding installation with oor pillar legs and US- H rough

R		Contract of the second
(Thomas)		
Ce		
17	and the	
C D	2	


CrossheadPolished Chrome US-BL422DC US-BL422DN Polished Nickel

White Lever US-BL422DC_LV Polished Chrome Polished Nickel US-BL422DN_LV

Cross Handles



Lever



BELGRAVIA FLOOR-STANDING PILLAR LEGS

Floor-mounting legs for Belgravia deck tub filler US-BL422D	Required rou (US-AA002)
Solid brass construction	Tub faucet so
Height: 27-7/8"	

Polished Chrome US-BL002FC Polished Nickel

US-BL002FN 7 3/32"


WALL UNIONS FOR EXPOSED TUB FILLER


Wall-mounting unions for Belgravia two-handle tub faucet	
Solid brass	
3/4" NPT	

Polished Chrome US-BL004WC Polished Nickel

Ø3 5/32"

US-BL004WN





ugh sold separately 2ROUGH) old separately (US-BL422D)

REQUIRED ROUGH



Rough for floor standing pillar legs

US-AA002ROUGH

See page 445 for detailed information

SUPPORT FOR FREESTANDING PILLAR LEGS (OPTIONAL)

Polished Chrome US-PLS002C Polished Nickel

US-PLS002N

BELGRAVIA WALL TUB SPOUT

Solid brass construction Spout reach: 7"


Inlet supply: 1/2" NPT

Polished Chrome US-BL0370WC Polished Nickel

US-BL0370WN







Tub faucets

BELGRAVIA

BELGRAVIA DECK-MOUNT TUB FAUCET WITH HANDSHOWER

Flühs quarter-turn ceramic disc valves
Single-function handshower with vacuum break and 60" hose
Spout reach: 6-1/2"
Spout swivel: No
Tub filler flow rate: 25 GPM at 45 PSI
Handshower flow rate: 2.0 GPM
nlet supply: 3/4" NPSM connectors




Crosshead Polished Nickel

Polished Chrome US-BL440DC US-BL440DN




White Lever Polished Chrome US-BL440DC_LV Polished Nickel US-BL440DN_LV

Cross Handles




Lever




BELGRAVIA EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD

Integrated volume control
White lever handle
Vernet thermostatic cartridge and Flühs volume control cartridge
Shower head features EasyClean nozzles
Plug at bottom of the valve is removable for future addition of handshower or tub spout, if desired.
Maximum shower head flow rate: 2.5 GPM at 80 PSI
Shower head swivel: No
Inlet connection size: 1/2"
Inlet connection type: Straight pipe with compression fitting

Polished Chrome US-BEL_SHOWERC US-BEL_SHOWERN Polished Nickel








BELGRAVIA EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND TUB SPOUT

Vernet thermostatic cartridge and Flühs volume control cartridge Shower head features EasyClean nozzles Maximum shower head flow rate: 2.5 GPM at
Maximum shower head flow rate: 2.5 GPM at
80 PSI
Shower head swivel: No
Inlet connection size: 1/2"
Inlet connection type: Straight pipe with compression fitting

Polished Chrome US-BEL_BSMC Polished Nickel US-BEL_BSMN






BELGRAVIA EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND HANDSHOWER ON HOOK


White lever handles
/ernet thermostatic cartridge and Flühs volum control cartridges
Shower head features EasyClean nozzles
Handshower includes vacuum breaker and 50" hose
Maximum shower head flow rate: 2.5 GPM at 80 PSI
Maximum handshower flow rate: 2.0 GPM at 80 PSI
Shower head swivel: No
nlet connection size: 1/2"
nlet connection type: Straight pipe with compression fitting

Polished Chrome US-BEL_BRACKETC Polished Nickel US-BEL_BRACKETN



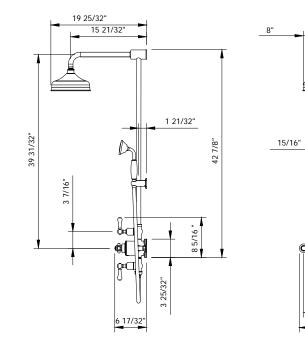






BELGRAVIA EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAIN HEAD AND HANDSHOWER ON SLIDER

1/2

wo integrated volume controls
Vhite lever handles
'ernet thermostatic cartridge and Flühs volume ontrol cartridges
hower head features EasyClean nozzles
landshower includes vacuum breaker and O" hose
1aximum shower head flow rate: 2.5 GPM at O PSI
1aximum handshower flow rate: 2.0 GPM at 0 PSI
hower head swivel: No
let connection size: 1/2"
let connection type: Straight pipe with ompression fitting

Polished Chrome US-BEL_SLIDERC US-BEL_SLIDERN Polished Nickel






BELGRAVIA EXPOSED THERMOSTATIC SHOWER SET WITH 8" RAINHEAD AND HANDSHOWER ON CRADLE

White lever handles	
Vernet thermostatic cartridge and Flühs volu control cartridges	ime
Shower head features EasyClean nozzles	
Handshower includes vacuum breaker and 60″ hose	
Maximum shower head flow rate: 2.5 GPM 80 PSI	at
Maximum handshower flow rate: 2.0 GPM a 80 PSI	at
Shower head swivel: No	
nlet connection size: 1/2"	
nlet connection type: Straight pipe with compression fitting	

Polished Chrome US-BEL_CRADLEC US-BEL_CRADLEN Polished Nickel










BELGRAVIA 1000 THERMOSTATIC VALVE TRIM

One water outlet Vernet thermostatic cartridge Required rough (sold separately) US-WLBP1000R Flow rate: 12 GPM at 60 PSI


Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel



Crosshead Polished Nickel










White Lever Polished Chrome US-BL1000RC_LV Polished Nickel US-BL1000RN_LV

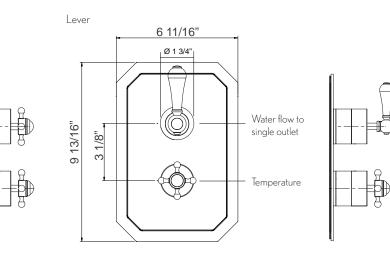

REQUIRED ROUGH




1000 3/4" thermostatic rough with single integrated volume control


US-WLBP1000R

See page 446 for detailed information

BELGRAVIA 1500 THERMOSTATIC VALVE TRIM

Two water outlets
Vernet thermostatic cartridge
Required rough (sold separately) US-WLBP1500R
Flow rate: 11 GPM at 60 PSI






CrossheadPolished Chrome US-BL1500RC Polished Nickel US-BL1500RN

Cross Handles 6 11/16" Ø 1 3/4" | Water control with diverter for 9 13/16" two separate 3 1/8" outlets O Temperature

90

US-EK101525C Polished Chrome



REQUIRED ROUGH



1500 3/4" thermostatic rough with single integrated volume control/diverter for independent two outlet use


US-WLBP1500R

See page 446 for detailed information

White Lever

Polished Nickel

Polished Chrome US-BL1500RC_LV US-BL1500RN_LV

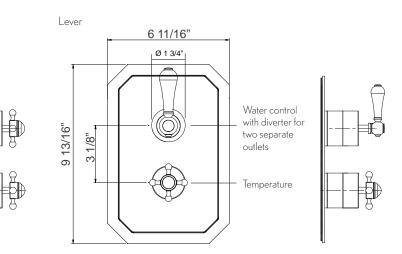

BELGRAVIA 2000 THERMOSTATIC VALVE TRIM


Two water outlets Vernet thermostatic cartridge Required rough (sold separately) US-WLBP2000R Flow rate: 13 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel



Crosshead Polished Chrome US-BL2000RC Polished Nickel US-BL2000RN Star

White Lever

Polished ChromeUS-BL2000RC_LVPolished NickelUS-BL2000RN_LV

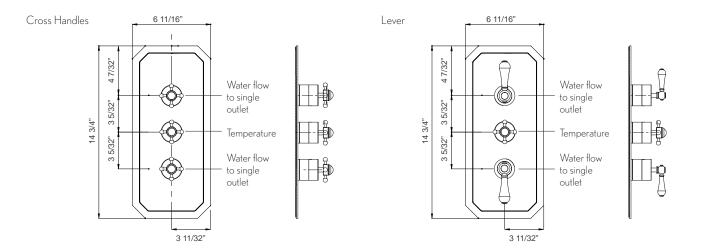

REQUIRED ROUGH



2000 3/4" thermostatic rough with two integrated volume controls

US-WLBP2000R

See page 447 for detailed information


BELGRAVIA 2500 THERMOSTATIC VALVE TRIM

Three water outlets	Polished Chrome
Vernet thermostatic cartridge	Polished Nickel
Required rough (sold separately) US-WLBP2500R	

Flow rate: 12 GPM at 60 PSI

Extension kit: US-EK101525C Polished Chrome UK-EK101525N Polished Nickel



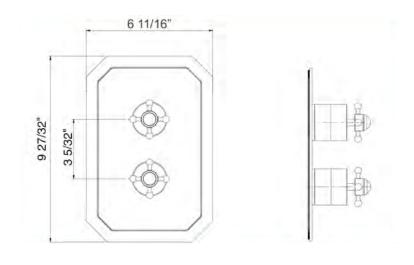

where we want was been warded with the second secon

REQUIRED ROUGH



2500 3/4" thermostatic rough with single integrated volume control/three-way diverter

US-WLBP2500R

See page 448 for detailed information

BELGRAVIA 3000 THERMOSTATIC VALVE TRIM

Three water outlets Vernet thermostatic cartridge and Flühs volume control cartridge Required rough (sold separately) US-WLBP3000R

Flow rate: 12 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome UK-EK2000N Polished Nickel




Crosshead Polished Chrome US-BL3000RC Polished Nickel

US-BL3000RN



White Lever Polished Chrome US-BL3000RC_LV US-BL3000RN_LV Polished Nickel



REQUIRED ROUGH



3000 3/4" thermostatic rough with integrated volume control and volume control/two-way diverter

US-WLBP3000R

See page 448 for detailed information

BELGRAVIA HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray	
Wall bracket includes vacuum breaker	
Handshower hose length: 60"	
Flange size: 2-1/8" x 2-1/8"	
Shower face size: 3"	
Maximum flow rate: 2.0 GPM	
Inlet connection: 1/2" NPT	

Polished Chrome US-BL964C Polished Nickel US-BL964N


BELGRAVIA HANDSHOWER RAIL

Length: 25-3/4"

Polished Chrome US-BL850C Polished Nickel

US-BL850N



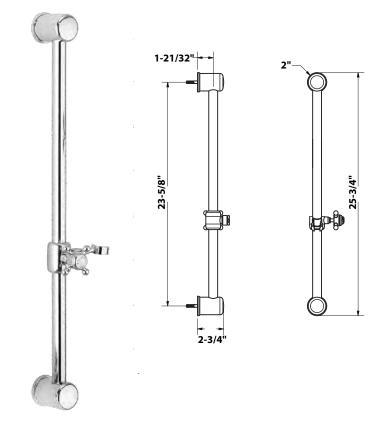

Shower heads

BELGRAVIA

Polished Nickel

BELGRAVIA 8" RAIN HEAD

Solid	brass
-------	-------

Single rain spray

EasyClean, anti-limescale nozzles Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Swivel: No

Solid brass

Swivel: No

Single rain spray

Polished Nickel

shower arm (sold separately)

Maximum flow rate: 2.5 GPM

Polished Chrome US-FH12C

Maximum flow rate: 2.5 GPM

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

Polished Chrome US-FH08C_EC US-FH08N_EC Polished Nickel


BELGRAVIA 12" RAIN HEAD

Can be wall or ceiling mounted using the appropriate

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

US-FH12N





G1/2"

12"

8" CEILING-MOUNT SHOWER ARM

Solid brass		
Projection: 7-3/4"		
Inlet connection size	e: 1/2" male NPT	
Polished Chrome	US-BL684C	

US-BL684N

TRADITIONAL 12" WALL-MOUNT SHOWER ARM

Solid brass	
Projection: 11"	
Height: 3-5/8"	
Inlet connection size: 1/2" male NPT	

Polished Chrome US-PRO689C Polished Nickel

US-PRO689N


ELEMENTS 8-JET SHOWER HEAD

Solid brass

Adjustable spray - wide to narrow rain Anti-limescale nozzles	
Anti-limescale nozzles	
Wall-mounted using shower arm (sold separately)	
3-1/2" diameter	
Swivel: Yes	
Maximum flow rate: 1.75 GPM	
Inlet connection type: 1/2" NPT	

Polished Chrome US-SH08C Polished Nickel US-SH08N





BELGRAVIA SHOWER ARM AND FLANGE


Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	pe: 1/2" male NPT	
Polished Chrome	US-BL664C	
Polished Nickel	US-BL664N	



96








BELGRAVIA

Accessories

BELGRAVIA PAPER HOLDER Polished Chrome US-BL029C Polished Nickel US-BL029N	Contraction of the second seco	2 ³ / ₄ " 7 ¹ / ₁₆ "	BELGRAVIA FRAME 20" X 28Framed mirror with ball corner detailsSize: 19-3/4" x 27-1/2"Concealed hanging systemPolished ChromeUS-A11CPolished NickelUS-A11N	3" MIRROR
BELGRAVIA TOWEL RING Polished Chrome US-BL013C Polished Nickel US-BL013N		2 ³ / ₄ " 7 ¹ / ₁₆ "		
BELGRAVIA ROBE HOOK Polished Chrome US-BL022C Polished Nickel US-BL022N		2 ³ / ₄ " 2 ³ / ₂ "		
BELGRAVIA 24" TOWEL BAR Polished Chrome US-BL023C Polished Nickel US-BL023N Note: Bars cannot be cut		2 3%" 2 3%"		O O
BELGRAVIA 24" DOUBLE TOWEL BA Polished Chrome US-BL028C Polished Nickel US-BL028N Note: Bars cannot be cut	R	4" 4" 26"		8



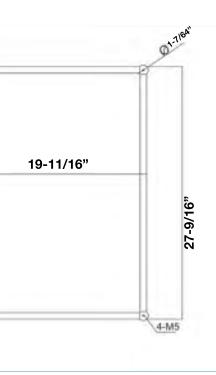

Belgravia exposed thermostatic shower set with 8" rain head in Polished Nickel (US-BEL_SHOWERN)

OFF

1

38

30

711

J

Belgravia exposed thermostatic shower set with 8" rain head and handshower on slider in Polished Nickel (US-BEL_SLIDERN)

•

...

12

:.



cross handles in Polished Chrome (US-BL422DC)

- - -



Belgravia 12" rain head (US-FH12C) with 8" ceiling+mount shower arm in Polished Chrome (US-PRO689C)




ARCADE






TRANSCENDING TIME, ARCADE DEFINES SPACE WITH A NOD TO BYGONE DESIGN ERAS

Exquisite fittings and ceramics of strong form and graceful lines tell a story of refined elegance. State-of-the-art craftsmanship combines with Belle Époque styling to create masterpiece bath fittings and fixtures for a truly unique decor. Arcade is the art of the bath.

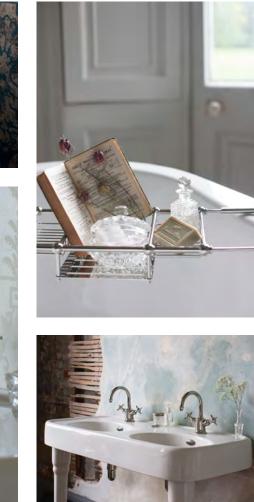






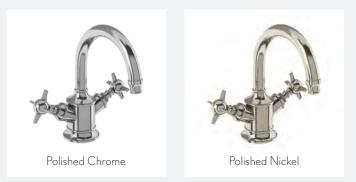



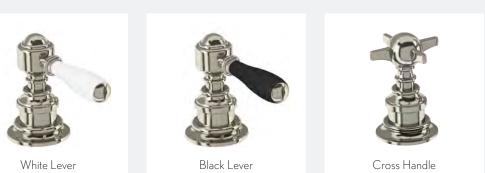

Metal Lever

Arcade widespread basin faucet with black lever handles in Polished Chrome (US-ARC15DPC_BLV)

AVAILABLE FINISHES

HANDLE OPTIONS

Basin faucets

ARCADE WIDESPREAD BASIN FAUCET

```
Cast brass spout and side valves
Flühs guarter-turn ceramic disc valves
Push drain included
Spout reach: 7"
```

Spout swivel: Yes Handle spread: 4" - 44" Maximum flow rate: 1.2 GPM



Crosshead Polished Chrome US-ARC15DPC Polished Nickel US-ARC15DPN




Black Lever Polished Chrome US-ARC15DPC_BLV Polished Nickel US-ARC15DPN_BLV



Metal Lever Polished Chrome US-ARC15DPC_CLV Polished Nickel US-ARC15DPN_NLV

US-ARC15DPC_WLV


US-ARC15DPN_WLV



PUSH DRAIN ASSEMBLY

INCLUDED

¢1 1/4*



Black Lever Polished Chrome Polished Nickel

US-ARC16C_BLV US-ARC16N_BLV



Crossh Handles Lever ñ 5 8 12 đĐ ШÞ 8 1⁷8

White Lever

Polished Nickel

Polished Chrome

Cross Handles

ARCADE WALL-MOUNT BASIN FAUCET TRIM

Trim for wall-mount basin faucet	Spout reach: 9-1/	
Solid brass construction	Spout swivel: Yes	
Flühs quarter-turn ceramic disc valves	Handle spread: 8	
Push drain assembly sold separately	Maximum flow ra	
Required rough sold separately (US-130ROUGH)		



Crosshead Polished Chrome US-ARC16C Polished Nickel US-ARC16N





110

Spout reach: 9-1/2"
Spout swivel: Yes
Handle spread: 8"
Maximum flow rate: 1.2 GPM



Metal Lever Polished Chrome Polished Nickel

US-ARC16C_CLV US-ARC16N_NLV

White Lever Polished Chrome Polished Nickel

US-ARC16C WLV US-ARC16N_WLV

REQUIRED ROUGH



Rough for three-hole wallmount basin faucet

US-130ROUGH

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel




Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

See page 440 for detailed information

Lever

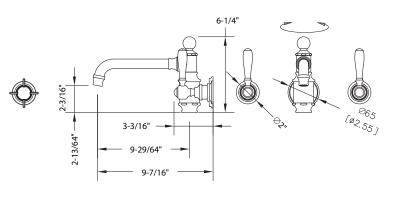

Basin faucets


ARCADE

ARCADE SINGLE-HOLE BASIN FAUCET


Flühs quarter-turn ceramic disc valves Push drain assembly included
Push drain assembly included
r ush uran assembly included
Spout reach: 5-1/2"
Spout swivel: Yes
Maximum flow rate: 1.2 GPM

Polished ChromeUS-ARC14DPCPolished NickelUS-ARC14DPN

PUSH DRAIN ASSEMBLY INCLUDED





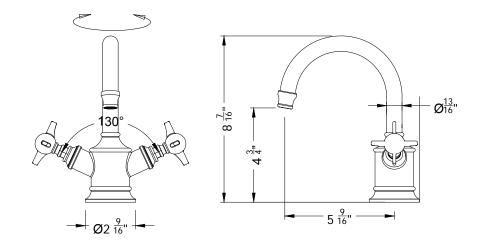

ARCADE WALL-MOUNT EXPOSED TUB FAUCET WITH HANDSHOWER

S	olid brass construction
F	lühs quarter-turn ceramic disc valves
	ingle-function handshower with vacuum breaker nd 60" hose
S	pout reach: 10-1/4"
S	pout swivel: Yes
Τι	ub filler flow rate: 6 GPM
Η	landshower flow rate: 1.75 GPM
lr	nlet supply: 3/4" NPSM connectors

Crosshead handles

Polished Chrome US-ARC19C Polished Nickel US-ARC19N

Metal lever handles


Polished Chrome US-ARC19C_CLV Polished Nickel US-ARC19N_NLV

Black lever handles


Polished Chrome US-ARC19C_BLV Polished Nickel US-ARC19N_BLV

White lever handles

Polished ChromeUS-ARC19C_WLVPolished NickelUS-ARC19N_WLV







Tub faucets

ARCADE DECK-MOUNT EXPOSED TUB FAUCET WITH HANDSHOWER

Solid brass construction

Flühs quarter-turn ceramic disc valves
Single-function handshower with vacuum breaker and 60" hose
Can be used for floorstanding installation with US-AA002D floor pillar legs and US- AA002ROUGH rough (sold separately)
Spout reach: 11-3/4"
Spout swivel: Yes
Tub filler flow rate: 6 GPM
Handshower flow rate: 1.75 GPM
Inlet supply: 3/4" NPSM connectors

Crosshead handles

Polished Chrome US-ARC18C Polished Nickel US-ARC18N

Metal lever handles

Polished Chrome US-ARC18C_CLV Polished Nickel US-ARC18N_NLV


Black lever handles

Polished Chrome US-ARC18C_BLV Polished Nickel US-ARC18N_BLV

White lever handles

Polished Chrome	US-ARC18C_WLV
Polished Nickel	US-ARC18N_WLV






ARCADE FLOOR-STANDING PILLAR LEGS

Floor-mounting legs for Arcade tub filler	Height: 29"
US-ARC18	Required rough
Solid brass construction	(US-AA002RO

Polished Chrome US-AA002DC Polished Nickel US-AA002DN

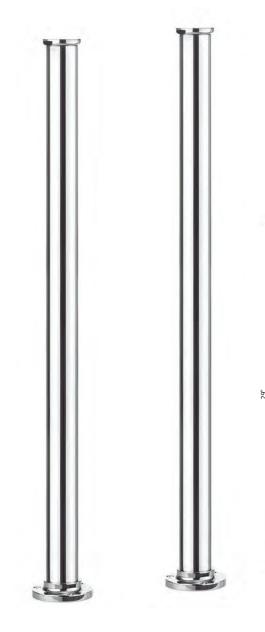

n sold separately OUGH)

REQUIRED ROUGH




Rough for floor standing pillar legs

US-AA002ROUGH

See page 445 for detailed information

SUPPORT FOR FREESTANDING PILLAR LEGS (OPTIONAL)

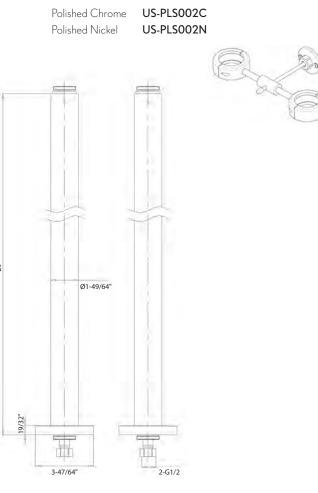

Tub faucets

ARCADE

ARCADE FLOOR-MOUNT SINGLE-LEVER TUB FILLER WITH HANDSHOWER

Single-handle operation with lever handle		
Solid brass construction		
Kerox ceramic disc cartridge		
Handshower includes vacuum breaker and 60" hose		
Required rough sold separately (US-418ROUGH)		



Metal Lever Polished Chrome US-ARC20C_CLV Polished Nickel US-ARC20N_NLV




Black Lever Polished Chrome US-ARC20C_BLV US-ARC20N_BLV Polished Nickel



White Lever Polished Chrome US-ARC20C_WLV Polished Nickel

US-ARC20N_WLV




- 100



Rough for floor-mount single-lever tub filler

See page 445 for detailed information




0 └**----**└Ø4-3/4"

REQUIRED ROUGH








Black Lever Polished Chrome Polished Nickel

US-H401-ARCC_BLV US-H401-ARCN_BLV

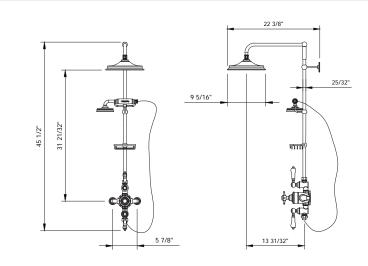

Two integrated volume controls	Max
Available with black, white or metal lever handles	Max
Vernet thermostatic cartridge and Flühs volume control cartridges	Shov Inlet
Shower head features EasyClean nozzles	
Shower head leadures Lasy Crean hozzies	Inlet
Handshower includes vacuum breaker and 60" hose	com



Metal Lever Polished Nickel

Polished Chrome US-H401-ARCC_CLV US-H401-ARCN_NLV aximum shower head flow rate: 1.75 GPM at 80 PSI aximum handshower flow rate: 1.75 GPM at 80 PSI ower head swivel: Yes et connection size: 1/2" et connection type: Straight pipe with mpression fitting **T** White Lever Polished Chrome US-H401-ARCC Polished Nickel US-H401-ARCN



ARCADE EXPOSED THERMOSTATIC SHOWER SET WITH 9" RAIN HEAD AND HANDSHOWER ON BAR

Two water outlets

Vernet thermostatic cartridge

Required rough (sold separately) US-WLBP1500R

ARCADE 1000 THERMOSTATIC VALVE TRIM

One water outlet Vernet thermostatic cartridge Required rough (sold separately) US-WLBP1000R



Flow rate: 12 GPM at 60 PSI Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel



Metal Lever Polished Chrome Polished Nickel

US-ARCV34C_CLV US-ARCV34N_NLV

White Lever US-ARCV34C Polished Chrome US-ARCV34N Polished Nickel



1000 3/4" thermostatic rough with single integrated volume control

US-WLBP1000R

See page 446 for detailed information

Metal Lever Polished Chrome Polished Nickel


US-ARCV35C_CLV US-ARCV35N_NLV

ARCADE 1500 THERMOSTATIC VALVE TRIM




Black Lever Polished Chrome Polished Nickel


US-ARCV35C_BLV US-ARCV35N_BLV



Black Lever Polished Chrome

US-ARCV34C_BLV Polished Nickel US-ARCV34N_BLV





Flow rate: 11 GPM at 60 PSI

Extension kit:

US-EK101525C Polished Chrome US-EK101525N Polished Nickel



White Lever Polished Chrome Polished Nickel

US-ARCV35C US-ARCV35N

REQUIRED ROUGH




1500 3/4" thermostatic rough with single integrated volume control/diverter for independent two outlet use

US-WLBP1500R

See page 446 for detailed information

Water flow to single outlet

Temperature






ARCADE

ARCADE HANDSHOWER WITH HOSE AND BRACKET WITH OUTLET

Single spray	
Wall bracket includes vacuum breaker	
Handshower hose length: 60"	
Flange size: 2-1/8" x 2-1/8"	
Shower face size: 4-1/8"	
Maximum flow rate: 1.75 GPM	
Inlet connection: 1/2" NPT	

Polished ChromeUS-ARC963CPolished NickelUS-ARC963N





Shower heads

ÌE

ARCADE

8" CEILING-MOUNT SHOWER ARM

Solid brass	
Projection: 7-3/4"	
Inlet connection size	e: 1/2" male NPT
Polished Chrome	US-BL684C
Polished Nickel	US-BL684N

ARCADE 9" AIR BOOST RAIN HEAD

Featuring air boost technology which infuses the water with air creating droplets that are dense but light and soft, while maintaining superior pressure Solid brass

Single rain spray

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Swivel: Yes

Solid brass Single rain spray

Swivel: Yes

1/2" NPT)

Maximum flow rate: 1.75 GPM

Inlet connection size: G 1/2"(compatible with 1/2" NPT)

ARCADE 13" AIR BOOST RAIN HEAD

Featuring air boost technology which infuses the

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Inlet connection size: G 1/2"(compatible with

Polished Chrome US-ARCV60C Polished Nickel US-ARCV60N


Maximum flow rate: 1.75 GPM

water with air creating droplets that are dense but light and soft, while maintaining superior pressure

Polished Chrome US-ARCV17C Polished Nickel US-ARCV17N







TRADITIONAL 12" WALL-MOUNT SHOWER ARM

Solid brass	í.
Projection: 11"	
Height: 3-5/8″	C
Inlet connection size: 1/2" male NPT	

Polished Chrome US-PRO689C Polished Nickel

US-PRO689N

ARCADE SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	pe: 1/2" male NPT	
Polished Chrome Polished Nickel	US-ARC064C US-ARC064N	




ELEMENTS 8-JET SHOWER HEAD


Solid brass


Adjustable spray - wide to narrow rain	
Anti-limescale nozzles	
Wall-mounted using shower arm (sold separately)	
3-1/2" diameter	
Swivel: Yes	
Maximum flow rate: 1.75 GPM	
Inlet connection type: 1/2" NPT	


Polished Chrome US-SH08C Polished Nickel US-SH08N








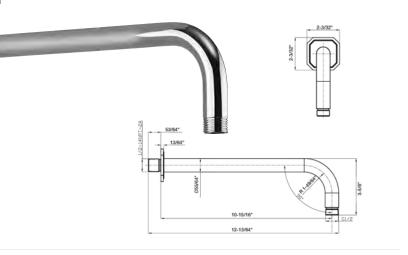

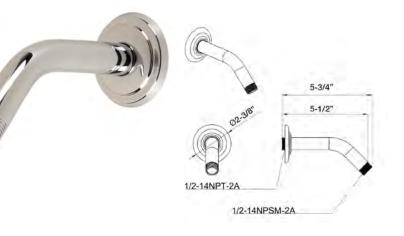

Accessories

ARCADE

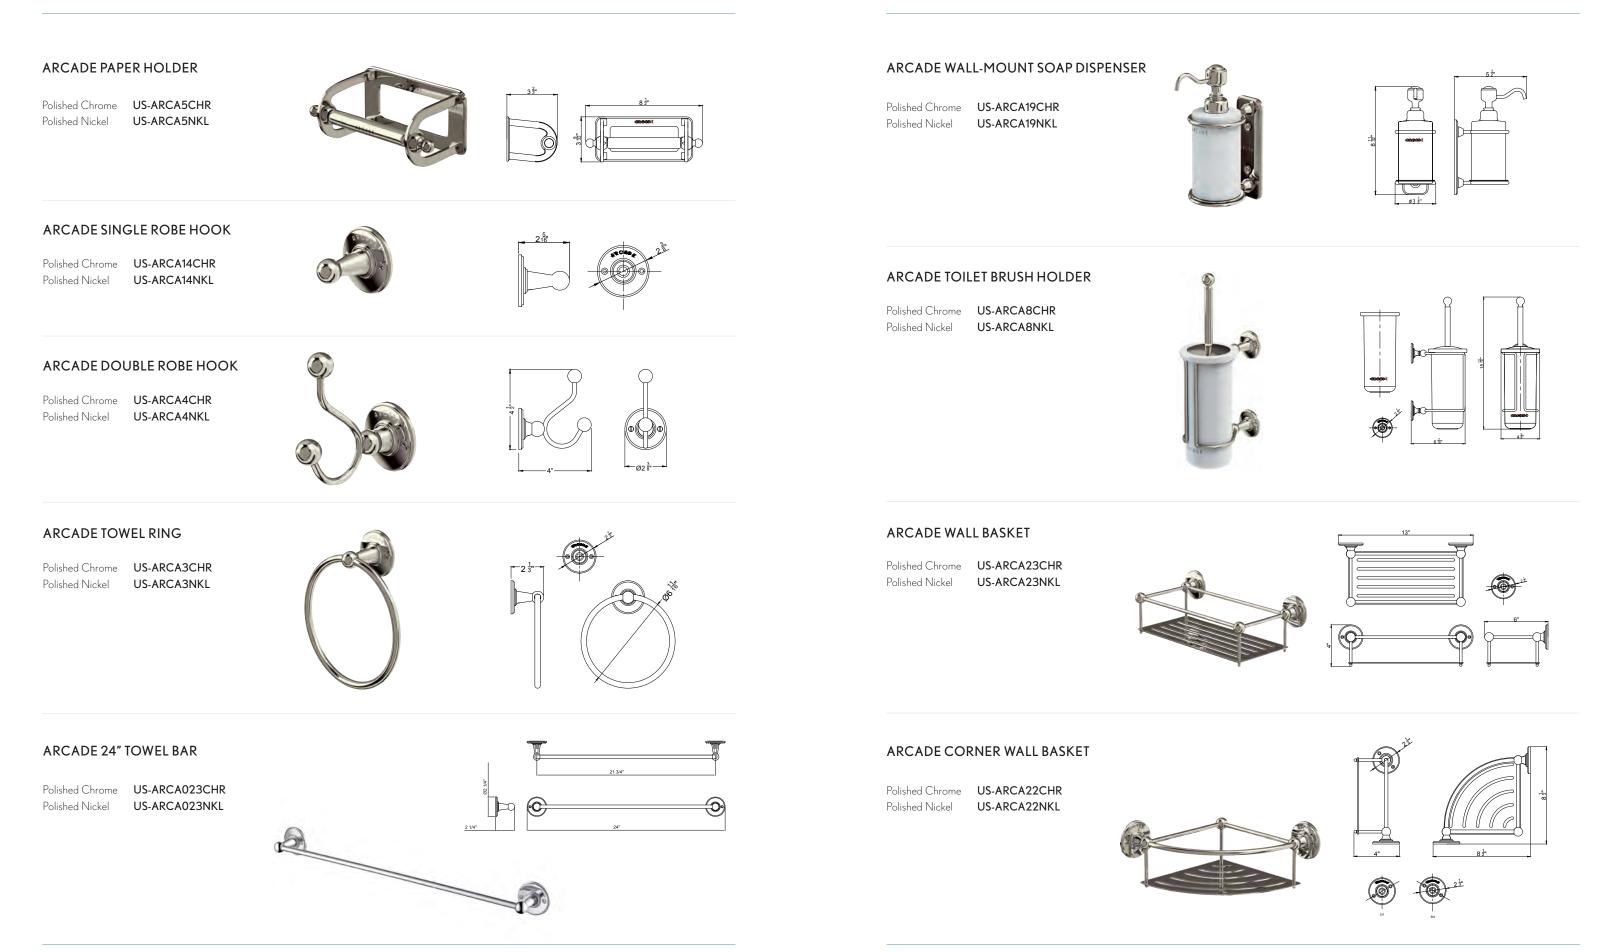


Accessories

ARCADE

ARCADE FREESTANDING DOUBLE PAPER HOLDER










ARCADE ELEMENTS TUB TRAY

Polished Chrome US-A27CHR Polished Nickel US-A27NKL

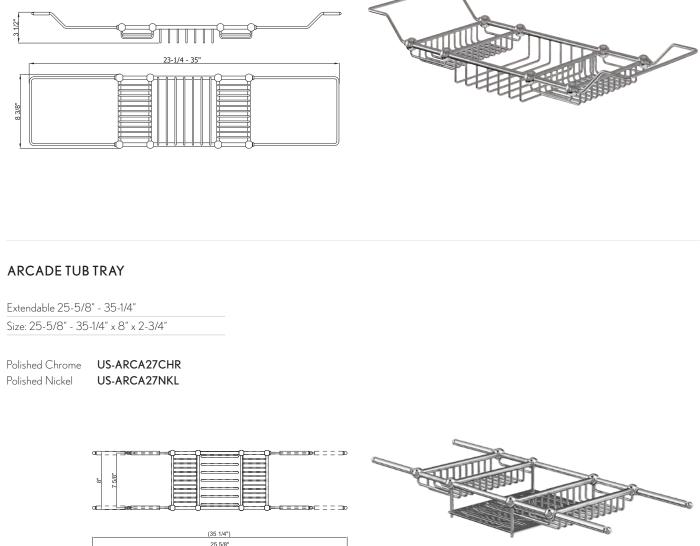


Extendable 25-5/8" - 35-1/4"	
Size: 25-5/8" - 35-1/4" x 8" x 2-3/4"	

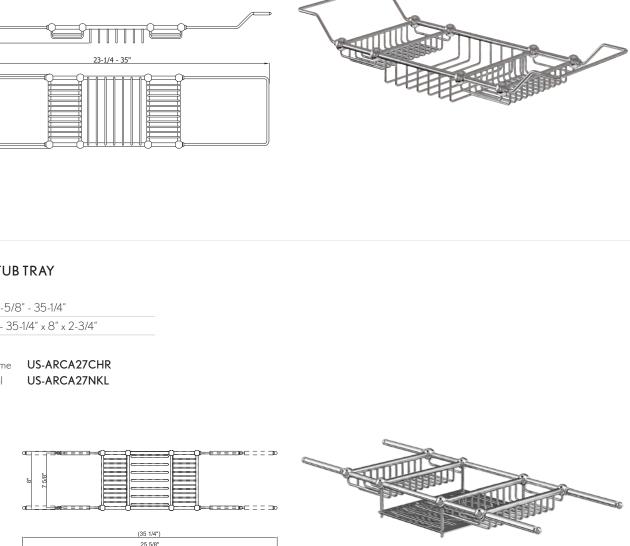



ARCADE FREESTANDING TOWEL HOLDER

Polished Chrome US-ARCA43CHR Polished Nickel US-ARCA43NKL









Mirrors

ARCADE 23" X 20" SQUARE SWIVEL MIRROR

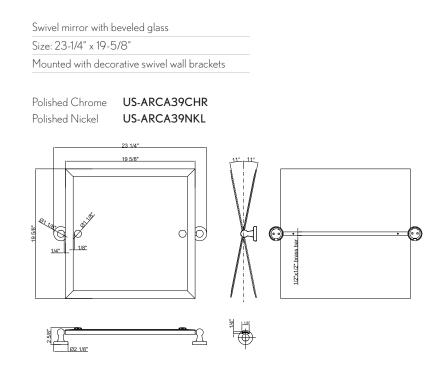



ARCADE 23" X 24" CURVED SQUARE SWIVEL MIRROR

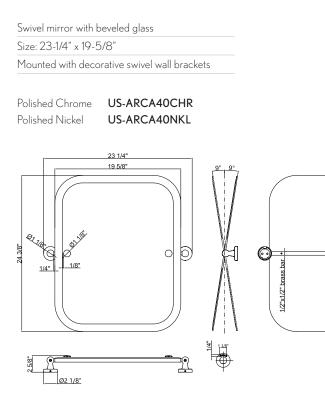



-0

Arcade double robe hook in Polished Nicke (US-ARCA4NKL)

Arcade 36" metal console set in Polished Chrome (US-ARC9003TH, US-ARC23C) Arcade widespread basin faucet with cross handles in Polished Chrome (US-ARC15DPC) Contemporary bottle trap in Polished Chrome (US-BTR0402C) Arcade curved square swivel mirror in Polished Chrome (US-ARCA40CHR)

Se al

C



1

A. S.

Arcade 47" double-basin console set (US-ARC12001TH, US-ARC2) Arcade single-hole faucet in Polished Nickel (US-ARC14DPN) 1

16 au



Contraction of the

Arcade single-hole basin faucet in Polished Chrome (US-ARC14DPC)


IT


SOAP

Arcade 24" console set (US-ARC6001TH, US-ARC2) Arcade single-hole basin faucet in Polished Chrome (US-ARC14DPC) Contemporary bottle trap in Polished Chrome (US-BTR0402C)





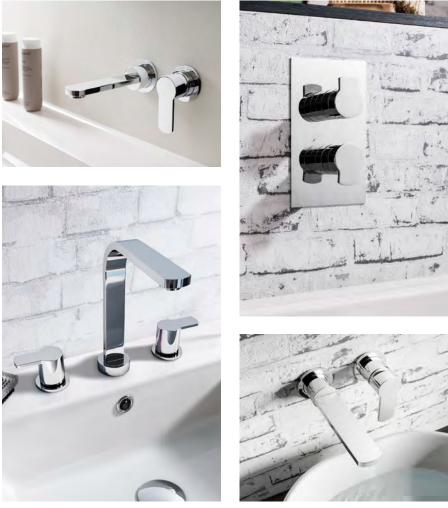

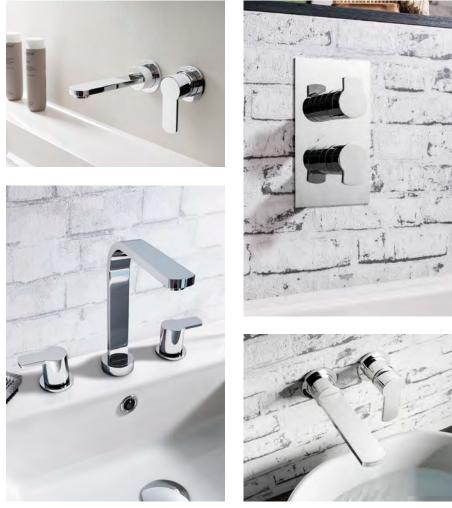


The Wisp Collection offers a sleek profile in luxuriously smooth finishes for a crisp, cohesive bathroom design. Defining contemporary with simple elegance. Wisp.


• NEW •

WISP

MINIMALIST LINES. MAXIMUM IMPACT.

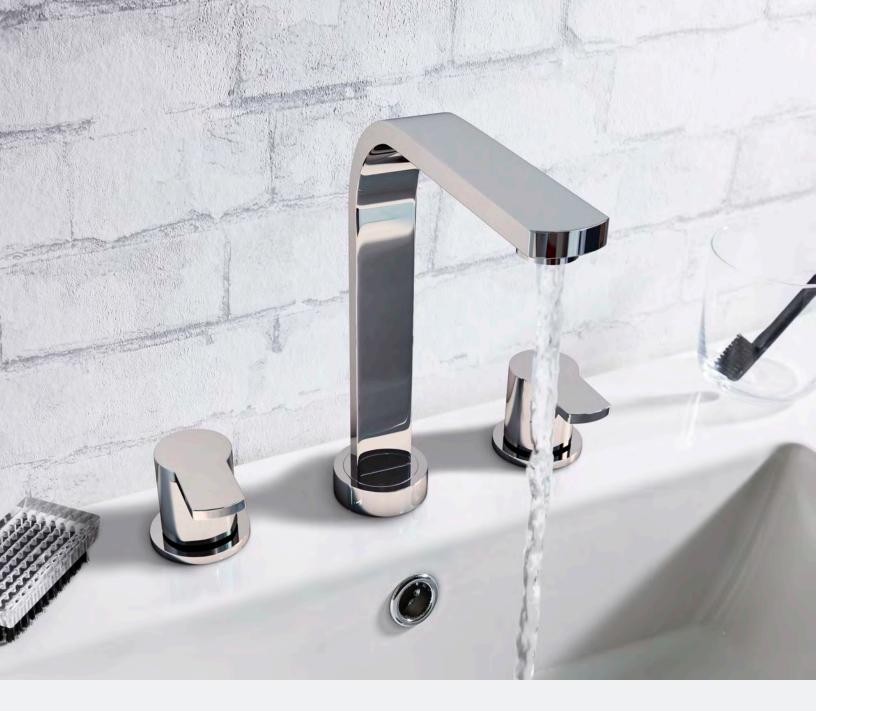

AVAILABLE FINISHES









Stainless

WISP

WISP WIDESPREAD BASIN FAUCET


Solid brass construction
Flühs quarter-turn ceramic disc valves
Push drain assembly included
Spout reach: 6-3/4"
Spout swivel: Yes
Handle spread: 4" - 32"
Maximum flow rate: 1.2 GPM

Polished Chrome US-WP130DPC Polished Nickel Stainless

PUSH DRAIN ASSEMBLY INCLUDED





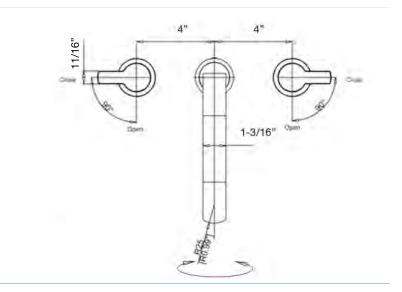

US-WP130DPN US-WP130DPV

Basin faucets


WISP

WISP WIDESPREAD BASIN FAUCET (LONG SPOUT)

lühs quarter-turn ceramic disc valves	
Push drain assembly included	
Spout reach: 8-5/8"	
Spout swivel: Yes	
landle spread: 4″ - 32″	
1aximum flow rate: 1.2 GPM	

Polished Chrome US-WP135DPC Polished Nickel Stainless






WISP WALL-MOUNT SINGLE-LEVER BASIN FAUCET TRIM


Trim for wall-mount basin faucet	Required rough sc
Right-hand mixer handle (handle orientation	Spout reach: 7"
cannot be changed)	Spout swivel: No
Solid brass construction	Handle to spout s
Kerox ceramic disc cartridge	 Maximum flow rate
Push drain assembly sold separately	

Polished Chrome Polished Nickel Stainless

US-WP120WNC US-WP120WNN US-WP120WNV



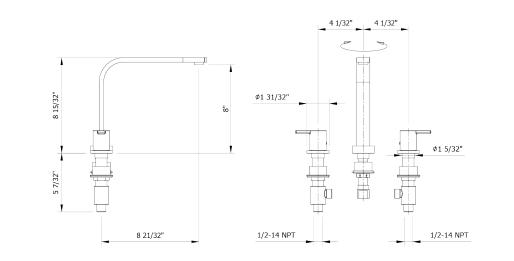



igh sold separately (US-120ROUGH)

out spread: 4-1/32" w rate: 1.2 GPM

REQUIRED ROUGH



Rough for wall-mount basin faucet

US-120ROUGH-C Polished Chrome

US-120ROUGH-N Polished Nickel

US-120ROUGH-V Stainless

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel

US-BSW0103V Stainless




Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

US-BSW0101V Stainless

See page 440 for detailed information



Rough sold separately

Basin faucets

WISP SINGLE-HOLE BASIN FAUCET

Solid brass construction Kerox ceramic disc cartridge Push drain assembly included

Spout reach: 4-3/4" Spout swivel: No Maximum flow rate: 1.2 GPM

Polished Chrome US-WP110DPC US-WP110DPN Polished Nickel Stainless US-WP110DPV

PUSH DRAIN ASSEMBLY INCLUDED





CLOSE 7 15/32" COLD 9/16" 2 9/16' Ø2 5/32" 2 нот MAX 1 13/16" 4 23/32"

WISP SINGLE-HOLE MINI BASIN FAUCET


Solid brass construction	
Kerox ceramic disc cartridge	
Push drain assembly included	
Spout reach: 3-3/4"	
Spout swivel: No	
Maximum flow rate: 1.0 GPM	

Polished Chrome US-WP114DPC Polished Nickel Stainless


US-WP114DPN US-WP114DPV

PUSH DRAIN ASSEMBLY INCLUDED









3 17/32"



WISP

WISP VESSEL FAUCET

Solid brass construction	Polished Chrome
Kerox ceramic disc cartridge	Polished Nickel
Push drain assembly sold separately	Stainless
Spout reach: 5-1/2"	
Spout swivel: No	
Maximum flow rate: 1.2 GPM	



Chrome US-WP112DNC Nickel US-WP112DNN US-WP112DNV

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel

US-BSW0103V Stainless




Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

US-BSW0101V Stainless

See page 440 for detailed information

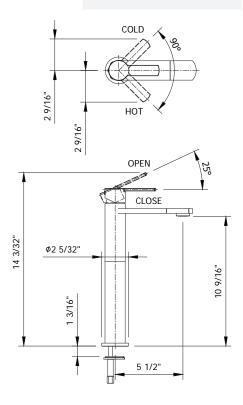

Tub faucets


WISP DECK-MOUNT TUB FAUCET WITH HANDSHOWER

Solid	brass	construction

Flühs quarter-turn ceramic disc valves	
Single-function handshower with vacuum breake and 60" hose	۶r
Spout reach: 9"	
Spout swivel: No	
Tub filler flow rate: 6 GPM	
Handshower flow rate: 2.0 GPM	
Inlet supply: 3/4" NPSM connectors	

Polished Chrome US-WP450DC Polished Nickel US-WP450DN US-WP450DV Stainless



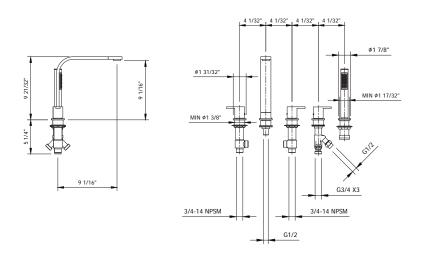

WISP THERMOSTATIC FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

Single-handle operation with lever handle	Polished Chrome
Solid brass construction	Polished Nickel
Vernet ceramic disc cartridge	Stainless
Handshower includes vacuum breaker and 60" hose	
Required rough sold separately (US-418ROUGH)	
Height to spout: 33-1/4"	
Spout reach: 9-1/2"	
Spout swivel: No	
Tub filler flow rate: 6 GPM at 60 PSI	
Handshower flow rate: 2.0 GPM	




Polished Chrome US-WP418TFC US-WP418TFN US-WP418TFV


REQUIRED ROUGH



Rough for floor-mount single-lever tub filler US-418ROUGH

See page 445 for detailed information








WISP


WISP 1000 THERMOSTATIC VALVE TRIM

One water outlet Vernet thermostatic cartridge Required rough (sold separately) US-WLBP1000R Flow rate: 12 GPM at 60 PSI Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525V Stainless

Polished Nickel Stainless

Polished Chrome US-WP1000RC US-WP1000RN US-WP1000RV

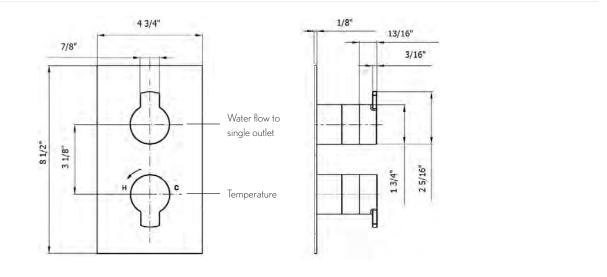

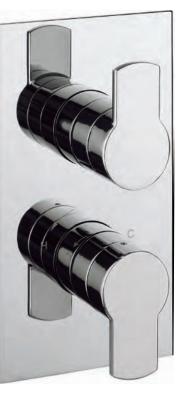

REQUIRED ROUGH



1000 3/4" thermostatic rough with single integrated volume control

US-WLBP1000R

See page 446 for detailed information

REQUIRED ROUGH

WISP 1500 THERMOSTATIC VALVE TRIM

Two water outlets

Vernet thermostatic cartridge

Required rough (sold separately) US-WLBP1500R

Flow rate: 11 GPM at 60 PSI

Extension kit: US-EK101525C Polished Chrome US-EK101525V Polished Nickel US-EK101525V Stainless

Polished Chrome US-WP1500RC US-WP1500RN Polished Nickel US-WP1500RV Stainless



1500 3/4" thermostatic rough with single integrated volume control/diverter for independent two outlet use

US-WLBP1500R

See page 446 for detailed information


WISP 2000 THERMOSTATIC VALVE TRIM


Two water outlets	
Vernet thermostatic cartridge	
Required rough (sold separately) US-WLBP2000R	
Flow rate: 13 GPM at 60 PSI	
Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel	

US-EK2000V Stainless

Polished Nickel Stainless

Polished Chrome US-WP2000RC US-WP2000RN US-WP2000RV

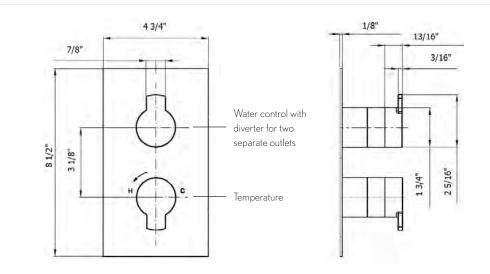






REQUIRED ROUGH



2000 3/4" thermostatic rough with two integrated volume controls

US-WLBP2000R

See page 447 for detailed information



WISP 2500 THERMOSTATIC VALVE TRIM

Three water outlets

Vernet thermostatic cartridge

Required rough (sold separately) US-WLBP2500R

Flow rate: 12 GPM at 60 PSI Extension kit:

US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525V Stainless

Polished Chrome US-WP2500RC Polished Nickel US-WP2500RN US-WP2500RV Stainless



REQUIRED ROUGH



2500 3/4" thermostatic rough with single integrated volume control/three-way diverter

US-WLBP2500R

See page 448 for detailed information

WISP 3000 THERMOSTATIC VALVE TRIM


Three water outlets Vernet thermostatic cartridge and Flühs volume control cartridge


Required rough (sold separately) US-WLBP3000R Flow rate: 12 GPM at 60 PSI

Extension kit: US-EK2000C Polished Chrome UK-EK2000N Polished Nickel US-EK2000V Stainless

Polished Chrome US-WP3000RC Polished Nickel Stainless

US-WP3000RN US-WP3000RV

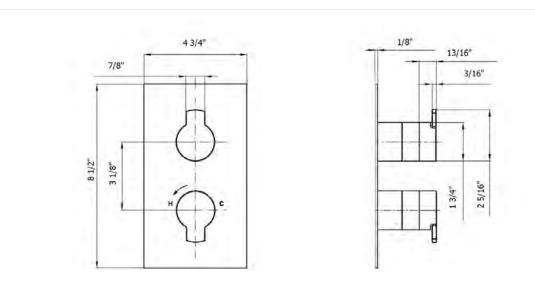






REQUIRED ROUGH



3000 3/4" thermostatic rough with integrated volume control and volume control/two-way diverter

US-WLBP3000R

See page 448 for detailed information



WISP 1701 HORIZONTAL THERMOSTATIC VALVE TRIM WITH HANDSHOWER

Two water outlets

Vernet thermostatic cartridge
Required rough (sold separately) US-WLBP1501R
Flow rate: 11 GPM at 60 PSI
Handshower flow rate 2.0 GPM
Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525V Stainless


Polished ChromeUS-WP1701RCPolished NickelUS-WP1701RNStainlessUS-WP1701RV




1501 3/4" thermostatic rough with volume control/ diverter and integrated hand shower outlet

US-WLBP1501R

See page 447 for detailed information

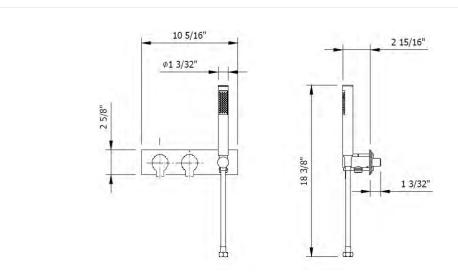


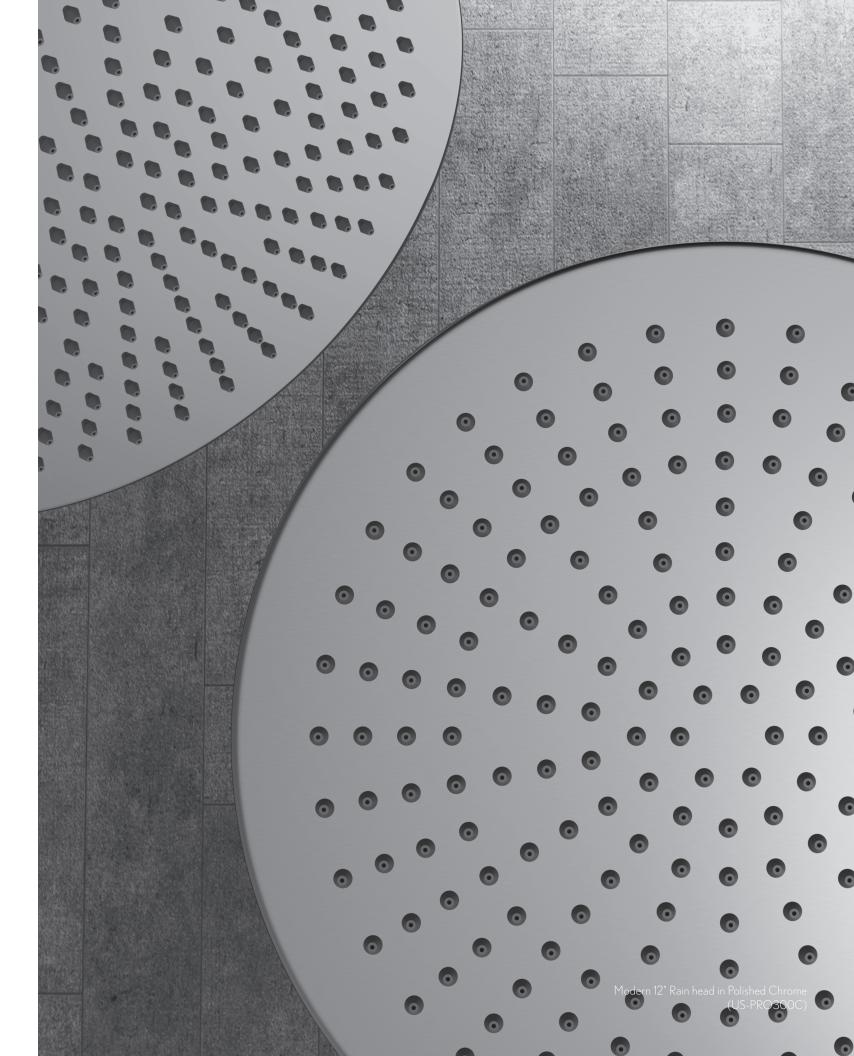

MODERN ROUND HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Wall bracket includes vacuum breaker	
Handshower hose length: 60"	
Flange size: 2"	
Maximum flow rate: 2.0 GPM	
Inlet connection: 1/2" NPT	

Polished ChromeUS-PRO963CPolished NickelUS-PRO963NStainlessUS-PRO963V



MODERN ROUND HANDSHOWER RAIL

Polished Chrome	US-PRO850C
Polished Nickel	US-PRO850N
Stainless	US-PRO850V

MODERN SQUARE HANDSHOWER RAIL


Length: 27-3/4"

Polished Chrome US-SK850C Stainless US-SK850V

MODERN SQUARE HANDSHOWER SET WITH HOSE, OUTLET AND BRACKET

Wall bracket includes vacuum breaker
Handshower hose length: 60"
Flange size: 1-1/2" x 1-1/2"
Maximum flow rate: 2.0 GPM
Inlet connection: 1/2" NPT


Polished Chrome	US-SK962C
Polished Nickel	US-SK962N
Stainless	US-SK962V



WISP WALL TUB SPOUT

Solid brass construction	
Spout reach: 8"	
Inlet supply: 1/2" NPT	

Polished Chrome	US-WP0370WC
Polished Nickel	US-WP0370WN
Stainless	US-WP0370WV

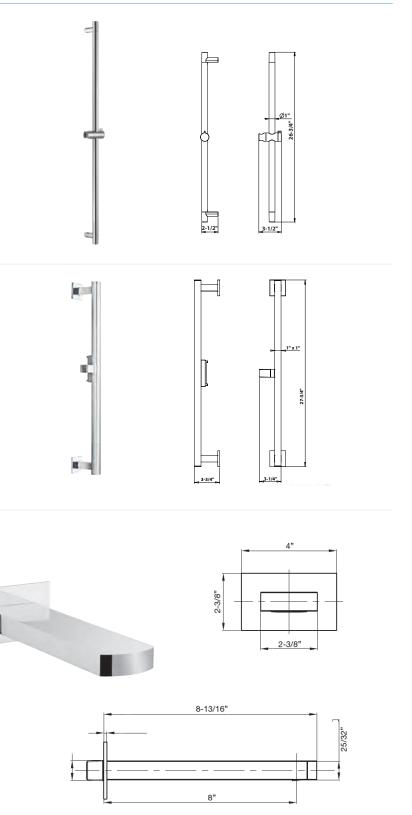

Stainless

Shower heads

MODERN 8" RAIN HEAD

Solid brass	¢7 7/8"	
Single rain spray		
EasyClean anti-limescale nozzles		1/32"
Can be wall or ceiling mounted using the appropriate shower arm (sold separately)		
Swivel: Yes		
Maximum flow rate: 2.0 GPM		
Inlet connection size: G 1/2" (compatible with 1/2" NPT)		1 <u>1 15/16"</u>
Polished Chrome US-PRO200C		
Polished Nickel US-PRO200N		

MODERN 12" RAIN HEAD

US-PRO200V

Solid brass			
Single rain spray		ø11 13/16"	2 19/32"
EasyClean anti-limescale nozzles			-
Can be wall or ceiling mounted using the appropriate shower arm (sold separately)	A A A A A A A A		
Swivel: Yes			
Maximum flow rate: 2.5 GPM		(• • • • • • • • • • • • • • • • • • •	
Inlet connection size: G 1/2" (compatible with 1/2" NPT)	and the second second second second		
Polished Chrome US-PRO300C			2 3/32"

ELEMENTS 8-JET SHOWER HEAD

US-PRO300N

US-PRO300V

Solid brass


Polished Nickel

Stainless

Adjustable spray - wide to narrow rain Anti-limescale nozzles	
Mall manuated using the user and	
Wall-mounted using shower arm (sold separately)	
3-1/2" diameter	
Swivel: Yes	
Maximum flow rate: 1.75 GPM	
Inlet connection type: 1/2" NPT	

Polished Chrome	US-SH08C
Polished Nickel	US-SH08N
Stainless	US-SH08S





8" CEILING-MOUNT SHOWER ARM

Solid brass		
Projection: 7-3/4"		
Inlet connection siz	e: 1/2" male NPT	
Polished Chrome	US-PRO689C	
Polished Nickel	US-PRO689N	
Stainless	US-PRO689V	

13" WALL-MOUNT SHOWER ARM

Solid brass
Projection: 13"
Inlet connection size: 1/2" male NPT

Polished Chrome US-FH684C Polished Nickel Stainless

US-FH684N US-FH684V

MODERN SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	pe: 1/2" male NPT	
Polished Chrome	US-PRO664C	
Polished Nickel	US-PRO664N	
Stainless	US-PRO664S	







WISP

WISP PAPER HOLDER

Polished Chrome US-WP029C Polished Nickel US-WP029N* Stainless

WISP ROBE HOOK

Polished Chrome US-WP021C Polished Nickel US-WP021N* Stainless

WISP TOWEL HOLDER

Polished Chrome US-WP013C Stainless

Polished Nickel US-WP013N*

WISP 24" TOWEL BAR

Polished Nickel Stainless



WISP 24" DOUBLE TOWEL BAR

Polished Nickel Stainless



*6-WEEK LEADTIME

Wisp single-lever wall-mount basin faucet in Polished Chrome (US-WP120WNC, US-120-ROUGHC)

















FIVE DISTINCTIVE FINISHES & NEW KNURLED DETAILING

Combining superb function and precision design, MPRO meets the exacting demand of today's modern bathroom. Two new finishes join the MPRO collection, Brushed Brass and Matte Black, in addition to the introduction of a stunning knurled detail, creating a bathroom that is as beautifully crafted as it is designed. Iconic definition. Versatile style. MPRO.

• NEW •

MPRO



MPRO

MPRO WIDESPREAD BASIN FAUCET

Solid brass construction
Flühs quarter-turn ceramic disc valves
Push drain assembly included
Spout reach: 5-1/4"
Spout swivel: Yes
Handle spread: 4" - 32"
Maximum flow rate: 1.2 GPM

Polished ChromeUS-PRO135DPCPolished NickelUS-PRO135DPNStainlessUS-PRO135DPVMatte BlackUS-PRO135DPMBBrushed BrassUS-PRO135DPBB



AVAILABLE FINISHES

Stainless







Polished Chrome


Polished Nickel



Matte Black




Brushed Brass









Basin faucets


MPRO SINGLE-HOLE BASIN FAUCET

Solid brass construction

Kerox ceramic disc cartridge	
Push drain assembly included	
Spout reach: 4-5/8"	
Spout swivel: No	
Maximum flow rate: 1.2 GPM	

Polished ChromeUS-PRO110DPCPolished NickelUS-PRO110DPNStainlessUS-PRO110DPVMatte BlackUS-PRO110DPMBBrushed BrassUS-PRO110DPBB

PUSH DRAIN ASSEMBLY INCLUDED







MPRO KNURLED SINGLE-HOLE BASIN FAUCET


Solid brass construction
Kerox ceramic disc cartridge
Push drain assembly included
Spout reach: 4-5/8"
Spout swivel: No
Maximum flow rate: 1.2 GPM

Polished Chrome	US-PRO110DPC-K
Stainless	US-PRO110DPV-K
Matte Black	US-PRO110DPMB-K
Brushed Brass	US-PRO110DPBB-K


PUSH DRAIN ASSEMBLY INCLUDED



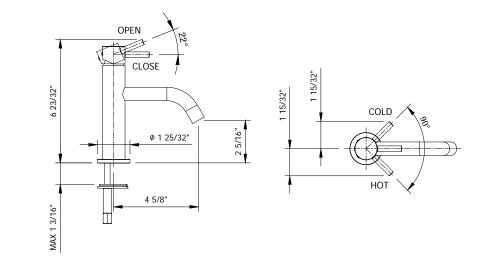







MPRO SINGLE-HOLE MINI BASIN FAUCET

Solid brass construction

Kerox ceramic disc cartridge
Push drain assembly included
Spout reach: 3-5/8"
Spout swivel: No
Maximum flow rate: 1.0 GPM

Polished Chrome US-PRO114DPC Polished Nickel US-PRO114DPN US-PRO114DPV Stainless

PUSH DRAIN ASSEMBLY INCLUDED





MPRO WALL-MOUNT WIDESPREAD BASIN FAUCET TRIM

Stainless


Matte Black


Brushed Brass

Trim for wall-mo	ount basin faucet
Solid brass cons	struction
Flühs quarter-tu	rn ceramic disc cartridges
Push drain asser	mbly sold separately
Required rough	sold separately (US-130ROUGH)
Spout reach: 8-	5/8"
Spout swivel: No	o
Handle to spout	spread: 4"
Maximum flow r	rate: 1.2 GPM





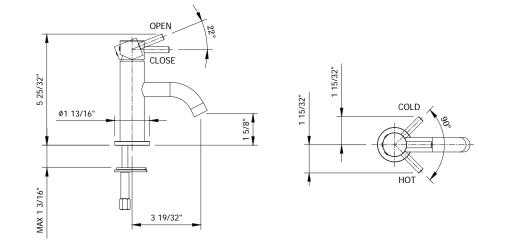

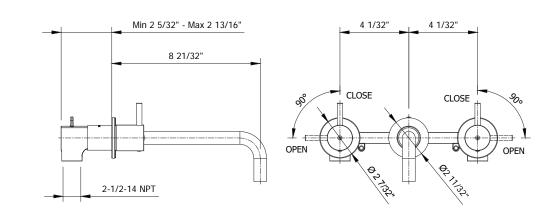

Polished Chrome US-PRO130WNC Polished Nickel US-PRO130WNN US-PRO130WNV US-PRO130WNMB US-PRO130WNBB

REQUIRED ROUGH



Rough for 3-hole wall-mount basin faucet

US-130ROUGH

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel

US-BSW0103V Stainless

US-BSW0103MB Matte Black

US-BSW0103BB Brushed Brass



Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

US-BSW0101V Stainless

See page 440 for detailed information




MPRO

MPRO WALL-MOUNT SINGLE-LEVER BASIN FAUCET TRIM

Trim for wall-mount basin faucet	
Right-hand mixer handle (handle orientation cannot be changed)	
Solid brass construction	
Kerox ceramic disc cartridge	
Includes two spouts: 5-1/2" and 8-5/8"	
Push drain assembly sold separately	
Required rough sold separately (US-120RO	UGH)
Spout reach: 5-1/2" or 8-5/8"	
Spout swivel: No	
Handle to spout spread: 4"	
Maximum flow rate: 1.2 GPM	

Polished NIckel Stainless Matte Black Brushed Brass



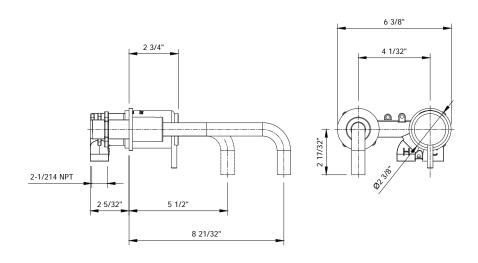

Polished Chrome US-PRO120WNC US-PRO120WNN US-PRO120WNV US-PRO120WNMB US-PRO120WNBB

REQUIRED ROUGH



Rough for single-lever wall-mount basin faucet

US-120ROUGH-C Polished Chrome

US-120ROUGH-N Polished Nickel

US-120ROUGH-V Stainless

US-120ROUGH-MB Matte Black

US-120ROUGH-BB Brushed Brass

See page 444 for detailed information

RECOMMENDED WASTES



Basin push drain with overflow

US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel

US-BSW0103V Stainless

US-BSW0103MB Matte Black

US-BSW0103BB Brushed Brass



Basin push drain without overflow

US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

US-BSW0101V Stainless

See page 440 for detailed information

Basin faucets

MPRO

MPRO VESSEL FAUCET

Kerox c	eramic disc cartridg	e
Push dr	ain assembly sold se	parately
Spout r	each: 5-1/2″	
Spout s	wivel: No	
Maximu	m flow rate: 1.2 GPI	Ч

Polished Chrome US-PRO112DNC Polished Nickel US-PRO112DNN US-PRO112DNV Stainless







US-BSW0103C Polished Chrome

US-BSW0103N Polished Nickel

US-BSW0103V Stainless



US-BSW0101C Polished Chrome

US-BSW0101N Polished Nickel

US-BSW0101V Stainless


See page 440 for detailed information


MPRO FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

Single-handle operation with lever handle	Height to spout: 38	
Solid brass construction	Spout reach: 9-3/8	
Kerox ceramic disc cartridge	Spout swivel: Yes	
Handshower includes vacuum breaker and 60" hose	Tub filler flow rate: 6	
Required rough sold separately (US-418ROUGH)	Handshower flow r	

Polished Nickel Stainless


Polished Chrome US-PRO416FC US-PRO416FN US-PRO416FV



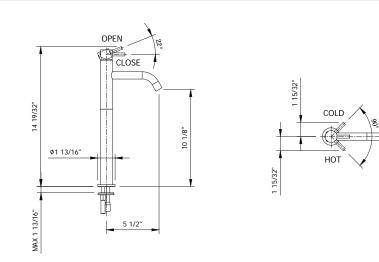

o spout: 38-3/4" each: 9-3/8"

flow rate: 6.6 GPM at 60 PSI ower flow rate: 2.0 GPM

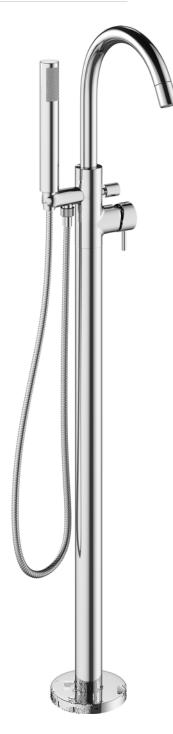

REQUIRED ROUGH



Rough for floor-mount single-lever tub filler US-418ROUGH

See page 445 for detailed information




MPRO

MPRO FLOOR-MOUNT THERMOSTATIC TUB FILLER WITH HANDSHOWER

Single-handle operation with lever handle	Height to spo
Solid brass construction	Spout reach: '
Vernet ceramic disc cartridge	Spout swivel:
Handshower includes vacuum breaker and	Tub filler flow
60" hose	Handshower
Required rough sold separately (US-418ROUGH)	

Polished Chrome US-PRO418TFC Polished Nickel Stainless Matte Black Brushed Brass

US-PRO418TFN US-PRO418TFV US-PRO418TFMB US-PRO418TFBB



out: 33-1/4"

: 9-3/8"

Yes

- v rate: 6.6 GPM at 60 PSI
- flow rate: 2.0 GPM



REQUIRED ROUGH



Rough for floor-mount single-lever tub filler US-418ROUGH

See page 445 for detailed information

Tub faucets

MPRO DECK-MOUNT TUB FAUCET WITH HANDSHOWER


Solid brass construction	
Flühs quarter-turn ceramic disc valves	
Single-function handshower with vacuum breaker and $60^{\prime\prime}$ hose	
Spout reach: 7-1/2"	
Spout swivel: Yes	
Tub filler flow rate: 6 GPM	
Handshower flow rate: 2.0 GPM	
Inlet supply: 3/4" NPSM connectors	

Stainless

Polished ChromeUS-PRO450DCPolished NickelUS-PRO450DN US-PRO450DV





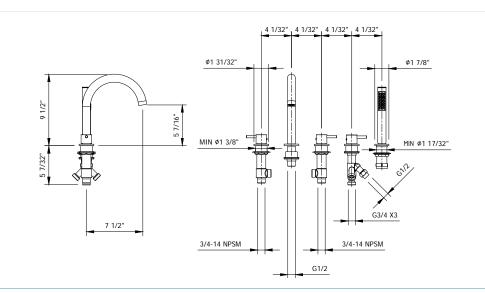





MPRO 1000 THERMOSTATIC VALVE TRIM

One water outlet

Vernet thermostatic cartridge Required rough (sold separately) US-WLBP1000R Flow rate: 12 GPM at 60 PSI Extension kit: US-EK101525C Polished Chrome

US-EK101525N Polished Nickel US-EK101525V Stainless US-EK101525MB Matte Black US-EK101525BB Brushed Brass

Polished Chrome US-PRO1000RC Polished Nickel Stainless Matte Black Brushed Brass

US-PRO1000RN US-PRO1000RV US-PRO1000RMB US-PRO1000RBB





REQUIRED ROUGH



1000 3/4" thermostatic rough with single integrated volume control

US-WLBP1000R

See page 446 for detailed information

MPRO 1500 THERMOSTATIC VALVE TRIM

Two water outlets


Vernet thermostatic cartridge


Required rough (sold separately) US-WLBP1500R


Flow rate: 11 GPM at 60 PSI

Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525N Stainless US-EK101525MB Matte Black US-EK101525BB Brushed Brass

Polished Chrome	US-PRO1500RC
Polished Nickel	US-PRO1500RN
Stainless	US-PRO1500RV
Matte Black	US-PRO1500RMB
Brushed Brass	US-PRO1500RBB

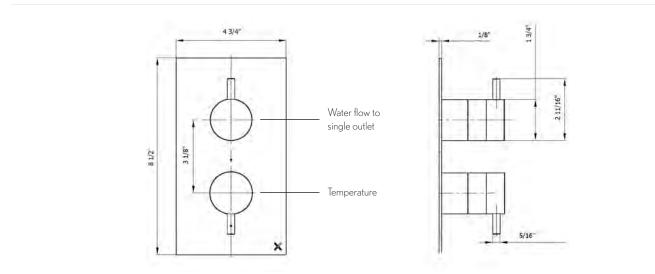



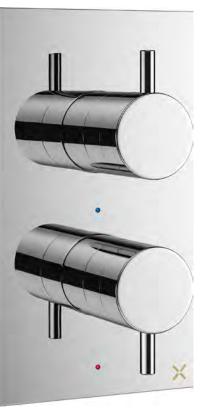


REQUIRED ROUGH



1500 3/4" thermostatic rough with single integrated volume control/diverter for independent two outlet use

US-WLBP1500R

See page 446 for detailed information

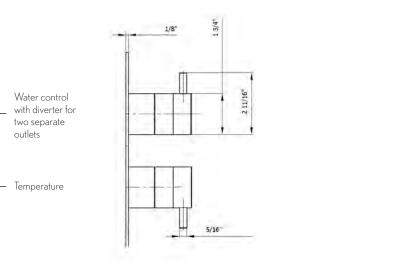

MPRO 2000 THERMOSTATIC VALVE TRIM

Two water outlets

Vernet thermostatic cartridge Required rough (sold separately) US-WLBP2000R Flow rate: 13 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel US-EK2000V Stainless US-EK2000MB Matte Black US-EK2000BB Brushed Brass

Polished Chrome US-PRO2000RC Polished Nickel Stainless Matte Black Brushed Brass

US-PRO2000RN US-PRO2000RV US-PRO2000RMB US-PRO2000RBB





REQUIRED ROUGH



2000 3/4" thermostatic rough with two integrated volume controls


US-WLBP2000R


See page 447 for detailed information


MPRO 2500 THERMOSTATIC VALVE TRIM

I hree water outlets
Vernet thermostatic cartridge
Required rough (sold separately) US-WLBP2500R
Flow rate: 12 GPM at 60 PSI
Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525N Stainless US-EK101525MB Matte Black US-EK101525BB Brushed Brass
Polished Chrome US-PRO2500RC

Polished Chrome	US-PRO2500RC
Polished Nickel	US-PRO2500RN
Stainless	US-PRO2500RV
Matte Black	US-PRO2500RMB
Brushed Brass	US-PRO2500RBB





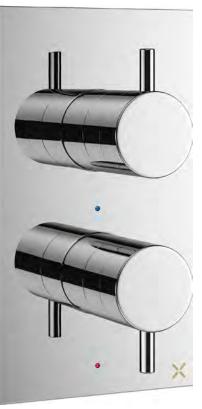


REQUIRED ROUGH



2500 3/4" thermostatic rough with single integrated volume control/three-way diverter

US-WLBP2500R

See page 448 for detailed information

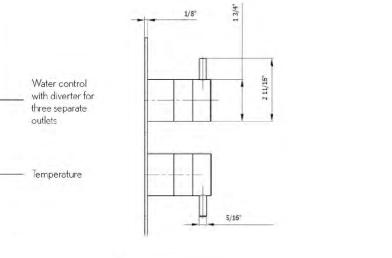

REQUIRED ROUGH

MPRO 3000 THERMOSTATIC VALVE TRIM

Three water outlets

Vernet thermostatic cartridge and Flühs volume control cartridge Required rough (sold separately) US-WLBP3000R Flow rate: 12 GPM at 60 PSI Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel US-EK2000V Stainless US-EK2000MB Matte Black US-EK2000BB Brushed Brass

Polished Chrome US-PRO3000RC Polished Nickel Stainless Matte Black Brushed Brass

US-PRO3000RN US-PRO3000RV US-PRO3000RMB US-PRO3000RBB







3000 3/4" thermostatic rough with integrated volume control and volume control/two-way diverter

US-WLBP3000R


See page 448 for detailed information


MPRO 1701 HORIZONTAL THERMOSTATIC VALVE TRIM WITH HANDSHOWER


/ernet thermostatic cartridge	
Required rough (sold separately) US-WLBP1501R	
Flow rate: 11 GPM at 60 PSI	
Handshower flow rate 2.0 GPM	
Extension kit: JS-EK101525C Polished Chrome JS-EK101525N Polished Nickel JS-EK101525V Stainless JS-EK101525MB Matte Black JS-EK101525BB Brushed Brass	

Polished Nickel Stainless Matte Black Brushed Brass



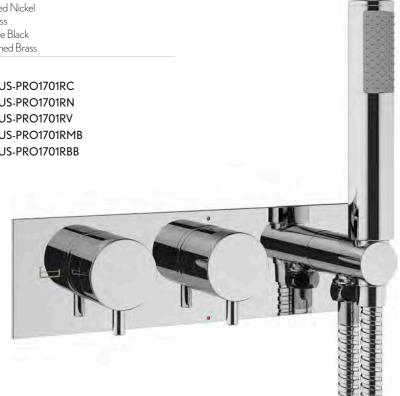

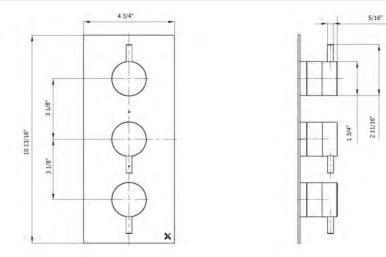




REQUIRED ROUGH



1501 3/4" thermostatic rough with volume control/ diverter and integrated hand shower outlet

US-WLBP1501R

See page 447 for detailed information



MODERN 8" RAIN HEAD


Solid brass

Single rain spray

EasyClean anti-limescale nozzles

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Polished Chrome	US-PRO200C
Polished Nickel	US-PRO200N
Stainless	US-PRO200V
Matte Black	US-PRO200MB
Brushed Brass	US-PRO200BB

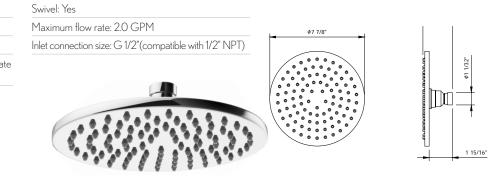


MODERN 12" RAIN HEAD

Solid brass		Swivel: Yes		
Single rain spray		Maximum flow rate: 2.5 GPM	¢11 13/16"	2 19/32"
EasyClean anti-lime	escale nozzles	Inlet connection size: G 1/2" (compatible with 1/2" NPT)		
Can be wall or ceilir shower arm (sold se	ng mounted using the appropriate eparately)			61 1/52*
Polished Chrome Polished Nickel	US-PRO300C US-PRO300N			
Stainless	US-PRO300V	\$\$\$\$\$} <u>\$</u> \$} <u>\$</u> } <u>\$</u> } <u>\$</u> }		2 3/32"
Matte Black	US-PRO300MB*	and the second second second		
Brushed Brass	US-PRO300BB*			


ELEMENTS 8-JET SHOWER HEAD

Solid brass	
Adjustable spray - wide to narrow rain	
Anti-limescale nozzles	
Wall-mounted using shower arm	
(sold separately)	

Polished Chrome	US-SH08C
Polished Nickel	US-SH08N
Stainless	US-SH08S
Matte Black	US-SH08MB*
Brushed Brass	US-SH08BB*







8" CEILING-MOUNT SHOWER ARM

Projection: 7-3/4"	
Inlet connection size	:: 1/2" male NPT
Polished Chrome	US-PRO689C
Polished Chrome Polished Nickel	US-PRO689C US-PRO689N
Polished Nickel	
rolisiled officine	US-PRO689N

13" WALL-MOUNT SHOWER ARM

Solid brass		
Projection: 13"		
Inlet connection si	ze: 1/2″ male N	PT

Polished Chrome	US-FH684C
Polished Nickel	US-FH684N
Stainless	US-FH684V
Matte Black	US-FH684MB
Brushed Brass	US-FH684BB

MODERN SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection type	e: 1/2" male NPT	
Polished Chrome	US-PRO664C	

US-PRO664N Polished Nickel Stainless US-PRO664S Matte Black US-PRO664MB* US-PRO664BB* Brushed Brass



*6-WEEK LEADTIME


*6-WEEK LEADTIME



Handshowers

MPRO

MODERN ROUND HANDSHOWER SET WITH HOSE, OUTLET AND BRACKET

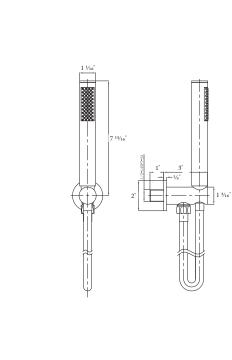

MODERN ROUND HANDSHOWER RAIL

US-PRO850C
US-PRO850N
US-PRO850V
US-PRO850MB
US-PRO850BB

MODERN SQUARE HANDSHOWER RAIL

Length: 27-3/4"

Polished Chrome US-SK850C Stainless US-SK850V

MPRO WALL TUB SPOUT

Solid brass construction
Spout reach: 8"
Includes both round and square flanges
1/2" NPT connection


Polished Chrome	US-PRO0370WC
Polished Nickel	US-PRO0370WN
Stainless	US-PRO0370WV
Matte Black	US-PRO0370WMB
Brushed Brass	US-PRO0370WBB



MODERN SQUARE HANDSHOWER SET WITH HOSE, OUTLET AND BRACKET

Single spray	
Wall bracket includes vacuum breaker	
Handshower hose length: 60"	
Flange size: 1-9/16" x 1-9/16"	
Maximum flow rate: 2.0 GPM	
Inlet connection: 1/2" NPT	

Polished Chrome	US-SK962C
Polished Nickel	US-SK962N
Stainless	US-SK962V







MPRO

MPRO PAPER HOLDER

Polished Chrome	US-PRO029C
Polished Nickel	US-PRO029N
Stainless	US-PRO029V
Matte Black	US-PRO029MB
Brushed Brass	US-PRO029BB



MPRO ROBE HOOK

Polished Chrome	US-PRO021C
Polished Nickel	US-PRO021N*
Stainless	US-PRO021V*
Matte Black	US-PRO021MB
Brushed Brass	US-PRO021BB

MPRO TOWEL HOLDER


Polished Chrome	US-PRO013C
Polished Nickel	US-PRO013N
Stainless	US-PRO013V
Matte Black	US-PRO013MB
Brushed Brass	US-PRO013BB

MPRO 24" TOWEL BAR

US-PRO023C
US-PRO023N*
US-PRO023V
US-PRO023MB*
US-PRO023BB*



*6-WEEK LEADTIME

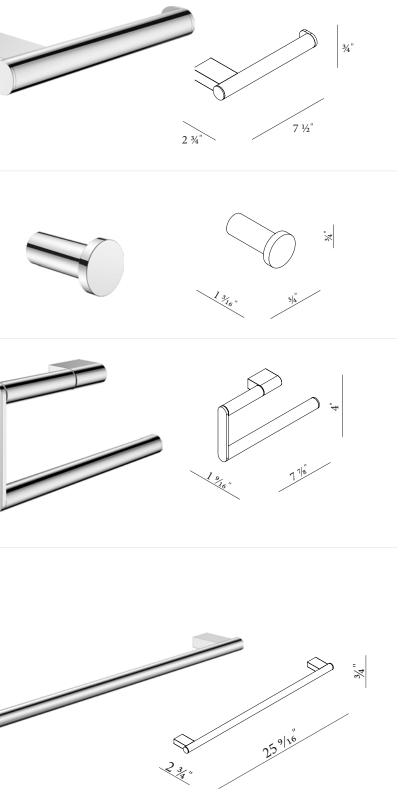

MPRO floor-mount single-lever tub filler with handshower in Stainless (US-PRO416FV)













PUSH BUTTON VALVE TECHNOLOGY

With 11 separate flow positions, this innovation not only looks smart with three designs, it's smart on the inside using pioneering flow control technology and is available in both single and double outlet options. Intuitive, precise control. Effortless performance. Dial up style with cutting-edge technology.

DIAL



DIAL VALVES

Dial is the latest in push button shower technology which enables you to precisely control the flow of the water as well as the temperature. This innovation not only looks smart with 3 designs, it's smart on the inside using pioneering flow control technology. This allows for total control over your bathing and showering experience.

ADVANTAGES OF DIAL VALVES

- 11 separate flow positions, which offers the perfect flexibility between ecofriendly showering and a luxurious high pressure power shower
- Intuitively designed with a simple push-button function for all of the family to easily operate
- Responsive controls for instant shut off preventing residual water
- Thermostatic valve technology for precise temperature control


- Clear symbols to easily identify functions
- Three stylish designs to choose from
- Suitable for bath and showering environments
- Single or double outlet options, as well as a bath filler option with an integrated handset
- Double outlet options can be used with individual or both outlets active at the same time

SLICK CONTROLS

SMART DESIGN & EFFORTLESS PERFORMANCE



Push the top dial once to start/stop water flow



Turn to increase/reduce the water flow



Turn the middle dial to adjust the temperature



Push the bottom dial to start/stop water flow of an additional outlet



DIAL CENTRAL 1000 THERMOSTATIC VALVE TRIM

One water outlet

Vernet thermostatic cartridge and Flühs volume control cartridge Volume control features push-button on/off technology Flow rate: 12 GPM at 60 PSI Required rough (sold separately) US-DL1000R

Polished Chrome US-DIAL-CENT-1C



REQUIRED ROUGH



Dial 1000 3/4" thermostatic rough with single integrated volume control

US-DL1000RC


Polished Chrome


See page 449 for detailed information

DIAL CENTRAL 2000 THERMOSTATIC VALVE TRIM

Two water outlets
Vernet thermostatic cartridge and Flühs volume control cartridges
Volume control features push-button on/off technology
Flow rate: 13 GPM at 60 PSI
Required rough (sold separately) US-DL2000R

Polished Chrome US-DIAL-CENT-3C

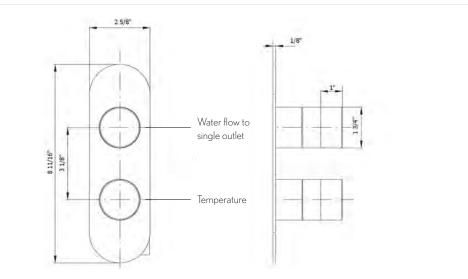





REQUIRED ROUGH




Dial 2000 3/4" thermostatic rough with two integrated volume controls

US-DL2000RC

Polished Chrome

See page 447 for detailed information



DIAL CENTRAL 2001 HORIZONTAL THERMOSTATIC VALVE TRIM

Two water outlets
Vernet thermostatic cartridge and Flühs volume control cartridges
Volume control features push-button on/off technology
For horizontal application only
Flow rate: 13 GPM at 60 PSI
Required rough (sold separately) US-DL2001R

Polished Chrome US-DIAL-CENT-4C

REQUIRED ROUGH



Dial 2001 horizontal 3/4" thermostatic rough with two integrated volume controls

US-DL2001RC

Polished Chrome

See page 450 for detailed information

DIAL CENTRAL 2001 HORIZONTAL THERMOSTATIC VALVE TRIM WITH HANDSHOWER

Two water outlets

Vernet thermostatic cartridge and Flühs volume control cartridges

Volume control features push-button on/off technology


For horizontal application only

Note: The hose and elbow included with this rough are required for installation at the rough-in stage with trim US-DIAL-CENT-12C


Polished Chrome US-DIAL-CENT-12C





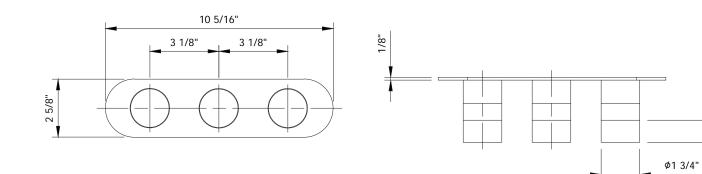





REQUIRED ROUGH



Dial 2001 horizontal 3/4" thermostatic rough with two integrated volume controls

US-DL2001RC

Polished Chrome

See page 450 for detailed information

DIAL BELGRAVIA 1000 THERMOSTATIC VALVE TRIM

One water outlet Vernet thermostatic cartridge and Flühs volume control cartridge Volume control features push-button on/off technology Flow rate: 12 GPM at 60 PSI Required rough (sold separately) US-DL1000R

Polished Chrome US-DIAL-BEL-1C



REQUIRED ROUGH



Dial 1000 3/4" thermostatic rough with single integrated volume control

US-DL1000RC


Polished Chrome


See page 449 for detailed information

DIAL BELGRAVIA 2000 THERMOSTATIC VALVE TRIM

Two water outlets Vernet thermostatic cartridge and Flühs volume control cartridges Volume control features push-button on/off technology Flow rate: 13 GPM at 60 PSI Required rough (sold separately) US-DL2000R

Polished Chrome US-DIAL-BEL-3C

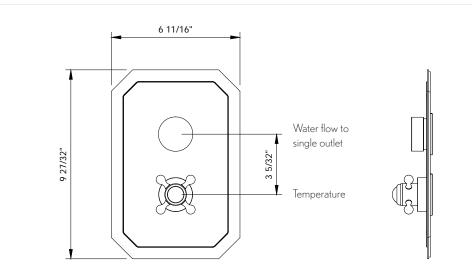

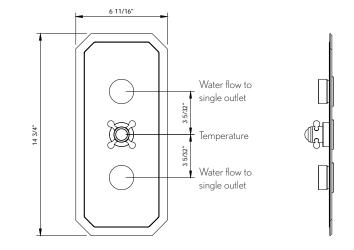



REQUIRED ROUGH



Dial 2000 3/4" thermostatic rough with two integrated volume controls

US-DL2000RC

Polished Chrome


See page 449 for detailed information

DIAL MPRO 2000 THERMOSTATIC VALVE TRIM

Two water outlets
Vernet thermostatic cartridge and Flühs volume
control cartridges
Volume control features push-button on/off
technology
Flow rate: 13 GPM at 60 PSI
Required rough (sold separately) US-DL2000R

Polished Chrome US-DIAL-KAI-3C





REQUIRED ROUGH



Dial 2000 3/4" thermostatic rough with two integrated volume controls

US-DL2000RC

Polished Chrome

See page 449 for detailed information




Dial MPRO thermostatic shower valve with 2 integrated volume controls (US-DIAL-KAI-3C, US-DL2000RC)







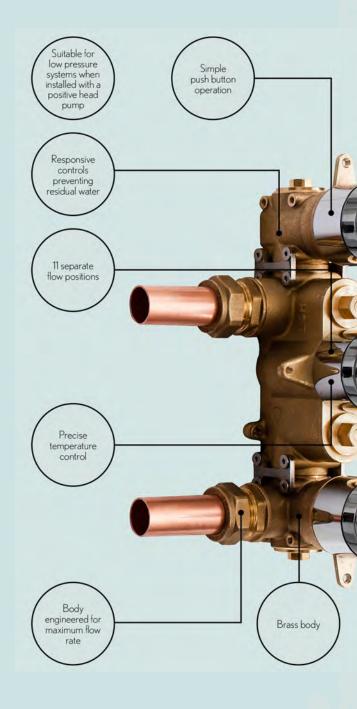

QUALITY SMARTER ON THE INSIDE

Simple push button operation, precise temperature control and 1F separate flow positions ensure Dial is designed with families in mind, whilst offering the perfect flexibility between eco friendly showering and a luxurious high pressure power shower.

FTF

6



BEREA

BEREA SINGLE-HOLE BASIN FAUCET

Solid brass construction	
Kerox ceramic disc cartridge	
Push drain assembly included	
Spout reach: 4-1/2"	
Spout swivel: No	
Maximum flow rate: 1.2 GPM at 60 PSI	
4" cover plate available (sold separately)	

Polished Chrome11-01-PCPolished Nickel11-01-PNSatin Nickel11-01-SNBronze11-01-BZ

BEREA

BEREA ANSWERS TRADITION WITH WARMTH AND PRECISION

Shape and texture harmonize in each detail of Berea to complete a balanced and peaceful space.

AVAILABLE FINISHES



Polished Chrome




Polished Nickel





Satin Nickel

Bronze

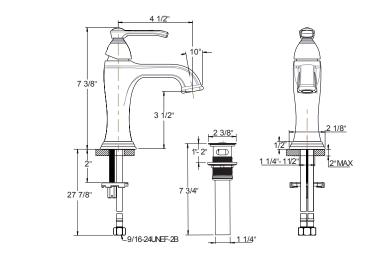



Basin faucets


BEREA WIDESPREAD BASIN FAUCET

Solid brass construction
Flühs quarter-turn ceramic disc cartridges
Push drain assembly included
Spout reach: 5-1/2"
Spout swivel: No
Handle spread: 6" - 12"
Maximum flow rate: 1.2 GPM at 60 PSI

Polished Chrome11-08-PCPolished Nickel11-08-PNSatin Nickel11-08-SNBronze11-08-BZ








BEREA DECK-MOUNT TUB FAUCET TRIM

Solid k	prass construction
Flühs	quarter-turn ceramic disc cartridges
Spout	reach: 9″
Spout	swivel: No
Inlet s	upply: 3/4" NPT
Requir	ed rough (sold separately): DT-R-RGH

Polished Chrome	11-02-T-PC
Polished Nickel	11-02-T-PN
Satin Nickel	11-02-T-SN
Bronze	11-02-T-BZ



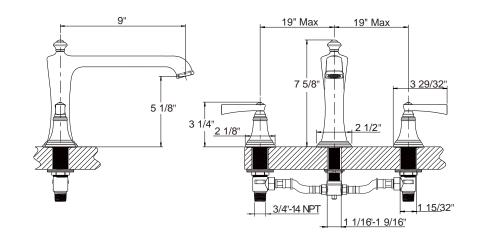

REQUIRED ROUGH



Deck tub set rough

DT-R-RGH

See page 455 for detailed information



Tub faucets

BEREA DECK-MOUNT TUB FAUCET WITH HANDSHOWER TRIM

Solid brass construction
Flühs quarter-turn ceramic disc cartridges
Single-function handshower with vacuum breaker and 60" hose
Spout reach: 9"
Spout swivel: No
Handshower maximum flow rate: 2.5 GPM at 80 PSI
Inlet supply: 3/4" NPT
Required rough (sold separately): DTHS-R-RGH


Polished Chrome	11-03-T-PC
Polished Nickel	11-03-T-PN
Satin Nickel	11-03-T-SN
Bronze	11-03-T-BZ



Deck tub set with hand shower rough

DTHS-R-RGH


See page 455 for detailed information

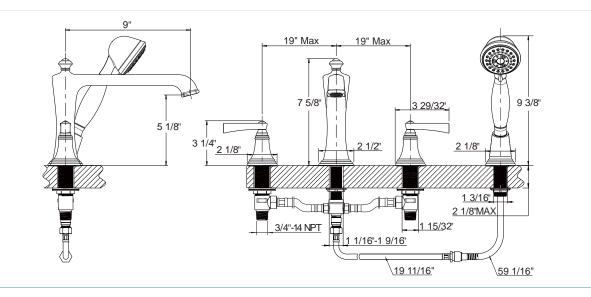

BEREA FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

Solid k	prass construction
Flühs d	quarter-turn ceramic disc cartridges
0	-function handshower with vacuum breaker D" hose
Include	es rough
Height	t to spout: 31-1/8" - 32-1/4"
Spout	reach: 8-7/16"
Spout	swivel: No
Tub fill	er flow rate: 6.75-8.25 GPM @ 20-40 PSI
Hands at 80	hower maximum flow rate: 2.0 GPM PSI

Polished Chrome	11-04-PC
Polished Nickel	11-04-PN
Satin Nickel	11-04-SN
Bronze	11-04-BZ

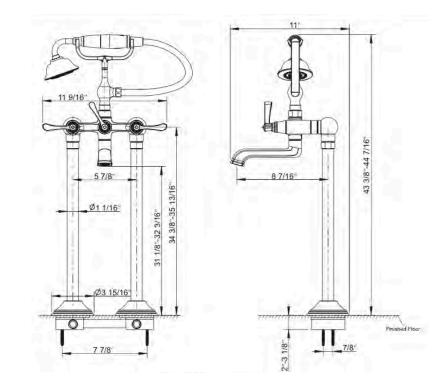



BEREA THERMOSTATIC VALVE TRIM

Temperature control only; volume control(s) sold separately
Vernet thermostatic cartridge
Flow rate: 10-12 GPM at 45 PSI
Required rough (sold separately): TH-RGH
Extension kit: 9Q1172CP-PC, 9Q1172RN-PN 9Q1172AP-SN, 9Q1172FO-BZ

Polished Chrome11.16-T-PCPolished Nickel11.16-T-PNSatin Nickel11.16-T-SNBronze11.16-T-BZ

REQUIRED ROUGH



3/4" thermostatic valve rough

TH-RGH

See page 450 for detailed information



BEREA VOLUME CONTROL AND DIVERTER TRIM

Volume control controls on/off and volume functions for a single component in a shower system

Diverter alternates water flow between two or three water outlets


Flühs quarter-turn ceramic disc cartridge


Required rough (sold separately): VC-RGH - Volume control DIV-RGH - Two-way diverter 3DV-RGH - Three-way diverter

Extenstion Kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome	11-17-T-PC
Polished Nickel	11-17-T-PN
Satin Nickel	11-17-T-SN
Bronze	11-17-T-BZ





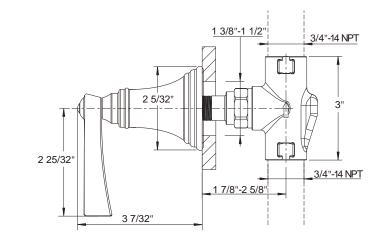

REQUIRED ROUGH



3/4" volume control rough

VC-RGH



Two-way diverter rough

DIV-RGH



Three-way diverter rough

3DV-RGH

See pages 452-453 for detailed information

BEREA DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL

One water outlet

Vernet thermostatic cartridge Flow rate: 10-12 GPM at 45 PSI Required rough (sold separately): TH1-RGH Extension kit: 9Q24000CP, 9Q24000PN, 9Q24000AP, 9Q24000FO

Polished Chrome11.19-T-PCPolished Nickel11.19-T-PNSatin Nickel11.19-T-SNBronze11.19-T-BZ

REQUIRED ROUGH



Dual-control thermostatic valve rough

TH1-RGH

See page 451 for detailed information



BEREA DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL AND DIVERTER

Two water outlets	
Vernet thermostatic cartridge	
Flow rate: 10-12 GPM at 45 PSI	
Required rough (sold separately): TH2-RGH	
Extension kit: 9Q24000CP, 9Q24000PN, 9Q24000AP, 9Q24000FO	

Polished Chrome	11-20-T-PC
Polished Nickel	11-20-T-PN
Satin Nickel	11-20-T-SN
Bronze	11-20-T-BZ


REQUIRED ROUGH




Dual-control thermostatic valve rough


TH2-RGH

See page 451 for detailed information









BEREA PRESSURE-BALANCE VALVE TRIM

One water outlet
Kerox pressure-balance cartridge
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 11-15P-T-PC Polished Nickel 11-15P-T-PN Satin Nickel 11-15P-T-SN 11-15P-T-BZ Bronze

REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information



BEREA PRESSURE-BALANCE VALVE WITH DIVERTER TRIM

	s water flow between 2 outlets r head, tub spout/handshower, dshower
Kerox pressure-ba	alance cartridge
Flow rate: 3-5 GF	PM at 45 PSI
Required rough (s	old separately): PBTS-RGH
Extension kit: 5T10	C0319NT + 5P0C0582NT

11-14P-T-PC
11-14P-T-PN
11-14P-T-SN
11-14P-T-BZ


REQUIRED ROUGH




Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information



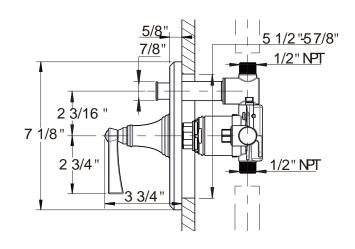



BEREA PRESSURE-BALANCE SHOWER SET TRIM

Set includes pressure-balance shower valve trim with lever handle and shower head with arm and flange Kerox pressure-balance cartridge Shower head features adjustable five-function spray Flow rate: 3-5 GPM at 45 PSI Required rough (sold separately): PBS-RGH Extension kit: 5T1C0319NT + 5P0C0582NT


Polished Chrome 11-15-T-PC Polished Nickel 11-15-T-PN 11-15-T-SN Satin Nickel Bronze 11-15-T-BZ





valve rough

See page 453 for detailed information

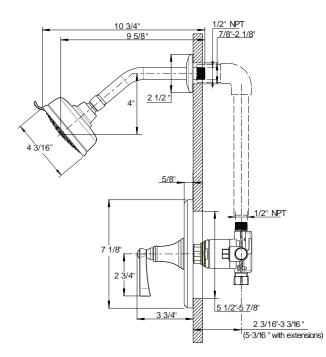





Pressure-balance shower

PBS-RGH

BEREA PRESSURE-BALANCE TUB AND SHOWER SET TRIM

Set includes pressure-balance shower valve with diverter trim with lever handle, shower head with arm and flange and wall tub spout


Kerox pressure-balance cartridge

Shower head features adjustable five-function spray

Flow rate: 3-5 GPM at 45 PSI

Required rough (sold separately): PBTS-RGH Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome	11-14-T-PC
Polished Nickel	11-14-T-PN
Satin Nickel	11-14-T-SN
Bronze	11-14-T-BZ

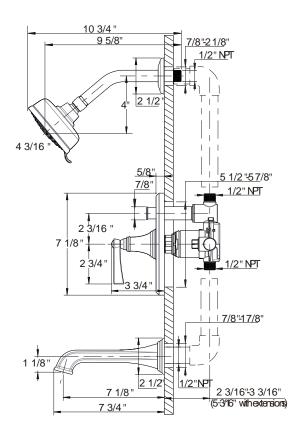

REQUIRED ROUGH



Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information








BEREA SHOWER HEAD WITH ARM AND FLANGE


Adjustable five-function spray
EasyClean anti-limescale nozzles
Includes swivel and arm and flange
Maximum flow rate: 2.0 GPM at 80 PSI
Inlet connection size: 1/2"

Polished Chrome	11-21-PC
Polished Nickel	11-21-PN
Satin Nickel	11-21-SN
Bronze	11-21-BZ

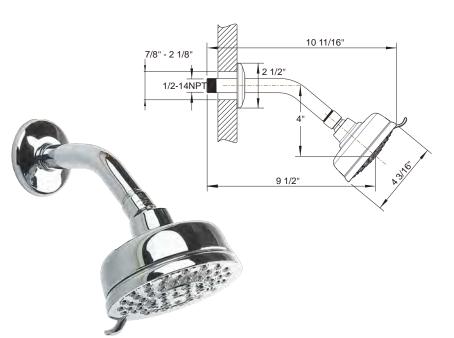

BEREA HANDSHOWER RAIL SET

Single-function spra	у
Handshower feature nozzles	es EasyClean anti-limescale
Handshower includ restrictor	es vacuum breaker and flow
26" adjustable bar v	vith bracket
60" decorative met	al hose included
Maximum flow rate:	2.5 gpm at 80 psi
nlet connection size adapter included	e: 1/2" NPT or 3/4" NPT,
Polished Chrome	11-31-PC
Polished Nickel	11-31-PN
Satin Nickel	11-31-SN
Bronze	11-31-BZ

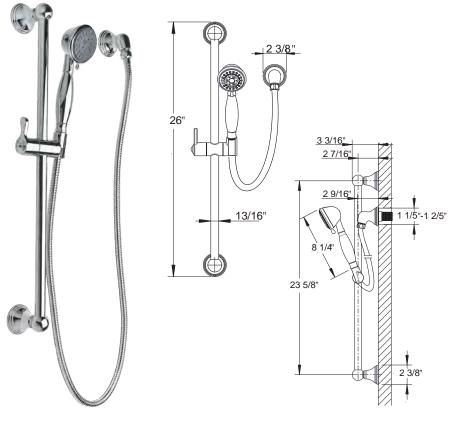





1 1/8

BEREA WALL TUB SPOUT

nlet connection siz	re: 1/2" NPT
Polished Chrome	11-WTS-PC
Polished Nickel	11-WTS-PN
Satin Nickel	11-WTS-SN
Bronze	11-WTS-BZ

BEREA PAPER HOLDER / TOWEL RING

Polished Chrome	11-58-PC
Polished Nickel	11-58-PN
Satin Nickel	11-58-SN
Bronze	11-58-BZ

BEREA ROBE HOOK Polished Chrome 11-51-PC Polished Nickel 11-51-PN Satin Nickel 11-51-SN Bronze 11-51-BZ



COVER PLATE


4" centerset cover plate

 Polished Chrome
 9Q1169CP-PC

 Polished Nickel
 9Q1169RN-PN

 Satin Nickel
 9Q1169AP-SN

 Bronze
 9Q1169FO-BZ



7 1/8"

7 3/4"

BEREA 18" TOWEL BAR

Polished Chrome	11-65-PC
Polished Nickel	11-65-PN
Satin Nickel	11-65-SN
Bronze	11-65-BZ


BEREA 24" TOWEL BAR

Polished Chrome	11-66-PC
Polished Nickel	11-66-PN
Satin Nickel	11-66-SN
Bronze	11-66-BZ

6

BEREA 30" TOWEL BAR

Polished Chrome	11-67-PC
Polished Nickel	11-67-PN
Satin Nickel	11-67-SN
Bronze	11-67-BZ

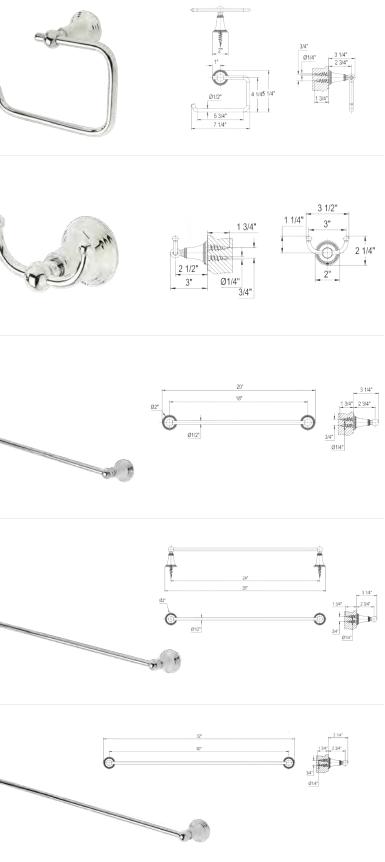



Berea widespread basin faucet in Polished Nickel (11-08-PN) Classic 25" basin (US-B153TH)

mom

KACTAN IN MARINE

Tecontrol management belows manufacturer water data on management below on material works on material works of material belows on the second with the second second second

Commissions and a commission of the commission o





With bold footings and a tapered design, Leyden expresses the majesty of water and light, movement and reflection. Strong yet simple, Leyden speaks to your aptitude and agility for style and functionality.








Polished Chrome



Cross Handle

AVAILABLE FINISHES

HANDLE OPTIONS



Basin faucets

LEYDEN SINGLE-HOLE BASIN FAUCET


Solid brass construction
Kerox ceramic disc cartridge
Push drain assembly included
Spout reach: 4-1/2"
Spout swivel: No
Maximum flow rate: 1.2 at 60 PSI
4" cover plate available (sold separately)

Polished Chrome	14-01-PC
Polished Nickel	14-01-PN
Satin Nickel	14-01-SN
Bronze	14-01-BZ




LEYDEN WIDESPREAD BASIN FAUCET


Solid brass construction Flühs quarter-turn ceramic disc cartridges	
Push drain assembly included	
Spout reach: 5-1/2"	
Spout swivel: No	
Handle spread: 6" - 12"	
Maximum flow rate: 1.2 at 60 PSI	



CrossheadPolished Chrome14X-08-PCPolished Nickel14X-08-PNSatin Nickel14X-08-SN

Cross Handles



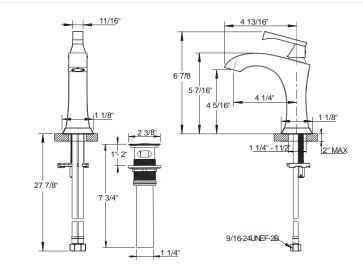




Metal Lever

14-08-PC
14-08-PN
14-08-SN
14-08-BZ

Lever



Tub faucets

LEYDEN

LEYDEN DECK TUB FAUCET TRIM

Solid brass construction
Flühs quarter-turn ceramic disc cartridges
Spout reach: 9"
Spout swivel: No
Inlet supply: 3/4" NPT
Required rough (sold separately): DT-R-RGH

REQUIRED ROUGH



Deck tub set rough

DT-R-RGH

See page 455 for detailed information

LEYDEN DECK TUB FAUCET WITH HANDSHOWER TRIM

Solid brass construction
Flühs quarter-turn ceramic disc cartridges
Single-function handshower with vacuum breake and 60" hose
Spout reach: 9″
Spout swivel: No
Handshower flow rate: 2.5 GPM at 80 PSI
nlet supply: 3/4" NPT
Required rough (sold separately): DTHS-R-RGF



CrossheadPolished Chrome Polished Nickel Satin Nickel

14X-02-T-PC 14X-02-T-PN 14X-02-T-SN



Bronze


Lever


14-02-T-PC 14-02-T-PN Satin Nickel 14-02-T-SN 14-02-T-BZ




Crosshead Polished Chrome 14X-03-T-PC Polished Nickel 14X-03-T-PN Satin Nickel 14X-03-T-SN

Cross Handles



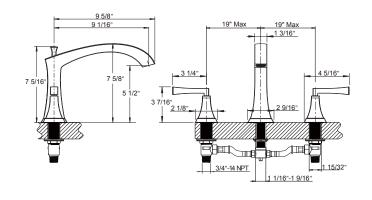

Cross Handles



REQUIRED ROUGH



Deck tub set with hand shower rough

DTHS-R-RGH


See page 455 for detailed information



Metal Lever

14-03-T-PC
14-03-T-PN
14-03-T-SN
14-03-T-BZ

Lever

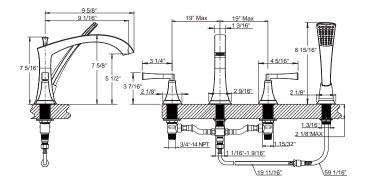


Tub faucets

LEYDEN FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

Single-handle			1 11
Ninglo-handlo	onoration	with lover	handle

Solid brass construction
Kerox ceramic disc cartridge
Single-function handshower with vacuum breaker and 60" hose
Includes rough
Spout reach: 8-1/2"
Height to spout: 30-1/2" - 32-3/4"
Spout swivel: No
Tub filler flow rate: 2.75-4.25 GPM at 20-45 PSI
Handshower flow rate: 2.5 GPM at 80 PSI

Polished Chrome	14-05-PC
Polished Nickel	14-05-PN
Satin Nickel	14-05-SN
Bronze	14-05-BZ

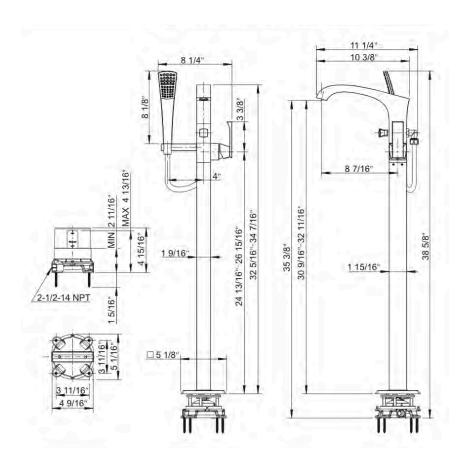






LEYDEN THERMOSTATIC VALVE TRIM


Temperature control only; volume control(s) sold separately	Extension kit: 9Q1172CP-PC
Vernet thermostatic cartridge	9Q1172RN-PN 9Q1172AP-SN
Flow rate: 10-12 GPM at 45 PSI	9Q1172FO-BZ
Required rough (sold separately): TH-RGH	




Crosshead Polished Chrome Polished Nickel Satin Nickel







Metal Lever Polished Chrome 14-16-T-PC Polished Nickel 14-16-T-PN Satin Nickel 14-16-T-SN 14-16-T-BZ Bronze



REQUIRED ROUGH



3/4" thermostatic valve rough

TH-RGH

See page 450 for detailed information


LEYDEN VOLUME CONTROL AND DIVERTER TRIM

Volume control controls on/off and volume functions for a single component in a shower system	Required rough VC-RGH - Vo DIV-RGH - Tw 3DV-RGH - TI
Diverter alternates water flow between two or three water outlets	
Flühs quarter-turn ceramic disc cartridge	Extension kit:



Crosshead	
Polished Chrome	14X-17-T-PC
Polished Nickel	14X-17-T-PN
Satin Nickel	14X-17-T-SN
Satin Mickel	147-17-1-211

Cross Handles



Required rough (sold separately): VC-RGH - Volume control DIV-RGH - Two-way diverter 3DV-RGH - Three-way diverter

5T1C0319NT + 5P0C0582NT



Metal Lever

Polished Chrome	14-17-T-PC
Polished Nickel	14-17-T-PN
Satin Nickel	14-17-T-SN
Bronze	14-17-T-BZ

REQUIRED ROUGH



3/4" volume control rough

VC-RGH



Two-way diverter rough


DIV-RGH



Three-way diverter rough

3DV-RGH


See pages 452-453 for detailed information



LEYDEN DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL

One water outlet	
Vernet thermostatic cartridge	
Flow rate: 10-12 GPM at 45 PSI	
Required rough (sold separately): TH1-RGH	







14-19-T-PC

14-19-T-PN

14-19-T-SN


14-19-T-BZ

Crosshead
Clossileau

Polished Nickel Satin Nickel

Polished Chrome 14X-19-T-PC 14X-19-T-PN 14X-19-T-SN

Metal Lever Polished Chrome Polished Nickel Satin Nickel Bronze

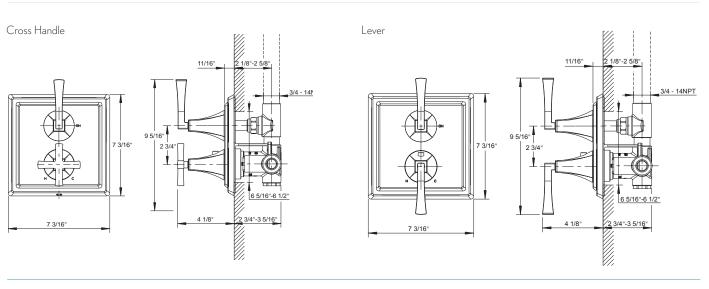

REQUIRED ROUGH




Dual-control thermostatic valve rough

TH1-RGH

See page 451 for detailed information


LEYDEN DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL AND DIVERTER

Two water outlets	Extension kit:
Vernet thermostatic cartridge	9Q24000CP 9Q24000PN
Flow rate: 10-12 GPM at 45 PSI	9Q240001N 9Q24000AP
Required rough (sold separately): TH2-RGH	9Q24000FO



Crosshead	
Polished Chrome	14X-20-T-PC
Polished Nickel	14X-20-T-PN
Satin Nickel	14X-20-T-SN

Poli Poli Sat Br

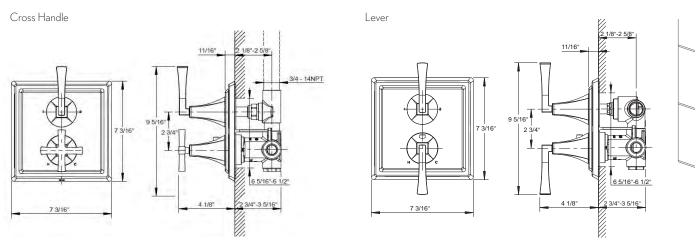



REQUIRED ROUGH



Dual-control thermostatic valve rough

TH2-RGH

See page 451 for detailed information

Metal Lever

lished Chrome	14-20-T-PC
lished Nickel	14-20-T-PN
tin Nickel	14-20-T-SN
onze	14-20-T-BZ

LEYDEN PRESSURE-BALANCE VALVE TRIM

One water outlet Kerox pressure-balance cartridge Flow rate: 3-5 GPM at 45 PSI Required rough (sold separately): PBS-RGH Extension kit: 5T1C0319NT + 5P0C0582NT






Crossh	nead
Polished	Chrom
Polished	Nickel

Satin Nickel

me **14X-15P-T-PC** 14X-15P-T-PN 14X-15P-T-SN


Metal Lever Polished Chrome 14-15P-T-PC Polished Nickel 14-15P-T-PN Satin Nickel 14-15P-T-SN 14-15P-T-BZ

Cross Handle



Lever

Bronze



REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information

LEYDEN PRESSURE-BALANCE VALVE WITH DIVERTER TRIM

Two water outlets	
Diverter alternates water flow between two c - tub spout/shower head, tub spout/handsho shower head/handshower	
Kerox pressure-balance cartridge	


Extension kit: 5T1C0319NT + 5P0C0582NT



Crosshead	
Polished Chrome	14X-14P-T-PC
Polished Nickel	14X-14P-T-PN
Satin Nickel	14X-14P-T-SN

Poli Poli Sati Bro

Cross Handle




Flow rate: 3-5 GPM at 45 PSI Required rough (sold separately): PBTS-RGH



Metal Lever

lished Chrome	14-14P-T-PC
lished Nickel	14-14P-T-PN
tin Nickel	14-14P-T-SN
onze	14-14P-T-BZ

Lever



REQUIRED ROUGH



Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information

LEYDEN PRESSURE-BALANCE SHOWER SET TRIM

Set includes pressure-balance shower valve trim and shower head with arm and flange Kerox pressure-balance cartridge Shower head features adjustable five-function spray



Extension kit: 5T1C0319NT + 5P0C0582NT






Crosshead Polished Chrome Polished Nickel Satin Nickel








Metal Lever Polished Chrome 14-15-T-PC 14-15-T-PN Polished Nickel 14-15-T-SN

14-15-T-BZ

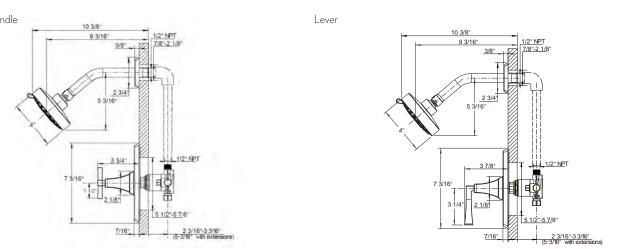

Satin Nickel

Bronze

REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information

LEYDEN PRESSURE-BALANCE TUB AND SHOWER SET TRIM

Set includes pressure-balance shower valve with	Flow rate: 3-5
diverter trim, shower head with arm and flange and wall tub spout	Required roug PBTS-RGH
Kerox pressure-balance cartridge	Extension kit:

Shower head features adjustable five-function spray

xtension kit:







Crosshead Polished Chrome 14X-14-T-PC Polished Nickel 14X-14-T-PN Satin Nickel 14X-14-T-SN

Cross Handle 5 1/2*-5 7/8 1/2" NPT 7/16: /8"-1 7/8 1/2" NP

7 1/16*

5/8

-12

2 3/16*-3 3/16* (5-3/16*with extension

258

low rate: 3-5 GPM at 45 PSI equired rough (sold separately):

5T1C0319NT + 5P0C0582NT







Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information






Metal Lever

Polished Chrome	14-14-T-PC
Polished Nickel	14-14-T-PN
Satin Nickel	14-14-T-SN
Bronze	14-14-T-BZ





Satin Nickel Bronze

LEYDEN SHOWER HEAD WITH ARM AND FLANGE


cludes swivel, arm and flange aximum flow rate: 2.0 GPM at 80 PSI	EasyClean anti-lime	escale nozzles
aximum flow rate: 2.0 GPM at 80 PSI	Includes swivel, arm	n and flange
	Maximum flow rate	: 2.0 GPM at 80 PSI
let connection size: 1/2"	Inlet connection siz	e: 1/2"
blished Chrome 14-21-PC	Polished Chrome	14-21-PC

14-21-SN

14-21-BZ



LEYDEN HANDSHOWER RAIL SET

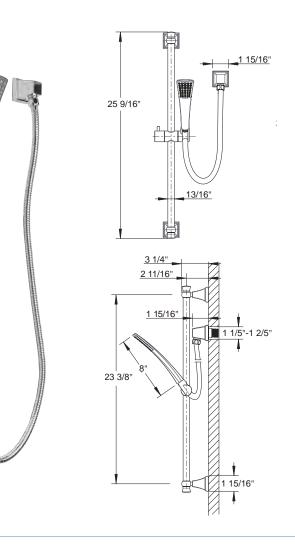

LEYDEN HANDSHOWER AND HOSE

Single-function spray
Handshower features EasyClean anti-limescale nozzles
Handshower includes vacuum breaker and flow restrictor
60" decorative metal hose included
Maximum flow rate: 2.5 at 80 PSI

Polished Chrome	14-34-PC
Polished Nickel	14-34-PN
Satin Nickel	14-34-SN
Bronze	14-34-BZ

LEYDEN WALL BRACKET WITH OUTLET

Inlet connection size: 1/2" NPT

Polished Chrome	14-35-PC
Polished Nickel	14-35-PN
Satin Nickel	14-35-SN

	1	11	1
	1	١	1
	1		
	1		

LEYDEN WALL TUB SPOUT

Spout reach: 7"
nlet connection size: 1/2" NPT

Polished Chrome	14-WTS-PC
Polished Nickel	14-WTS-PN
Satin Nickel	14-WTS-SN
Bronze	14-WTS-BZ

COVER PLATE


4" centerset cover plate


Polished Chrome	9Q1170CP-PC
Polished Nickel	9Q1170RN-PN
Satin Nickel	9Q1170AP-SN
Bronze	9Q1170FO-BZ




260






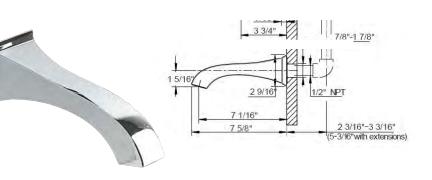

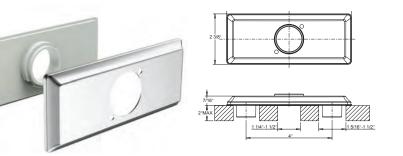

Accessories

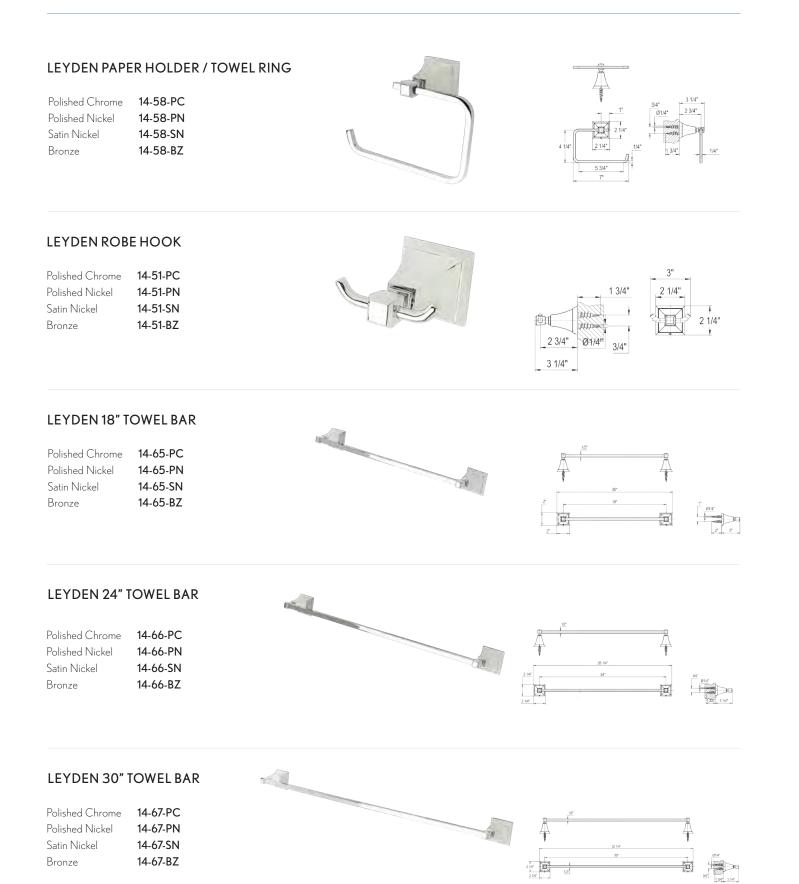



Polished Chrome (14X-08-PC)











DARBY

DARBY SINGLE-HOLE BASIN FAUCET

Solid brass construction	
Kerox ceramic disc cartridge	
Push drain assembly included	
Spout reach: 5-1/2"	
Spout swivel: No	
Maximum flow rate: 1.2 GPM at 60 PSI	
4" cover plate available (sold separately)	

Polished Chrome 15-01-PC Polished Nickel 15-01-PN Satin Nickel 15-01-SN


DARBY

CLASSIC MEETS ART DECO IN A STATEMENT OF DISTINCTIVE LUXURY


Inspired by the columns of early-Renaissance concert harps, Darby's solid, barrel-shaped form and clean fluid lines echo Old World elegance with contemporary sophistication.

AVAILABLE FINISHES










Basin faucets

DARBY WIDESPREAD BASIN FAUCET

Push drain assembly included Spout reach: 5-1/2" Spout swivel: No Handle spread: 6" - 12"	Solid brass construction Tühs quarter-turn ceramic disc cartridges	
Spout swivel: No	Push drain assembly included	
	Spout reach: 5-1/2"	
Handle spread: 6" - 12"	Spout swivel: No	
	Handle spread: 6" - 12"	
Maximum flow rate: 1.2 GPM at 60 PSI	Maximum flow rate: 1.2 GPM at 60 PSI	

Polished Chrome 15-08-PC Polished Nickel 15-08-PN Satin Nickel 15-08-SN



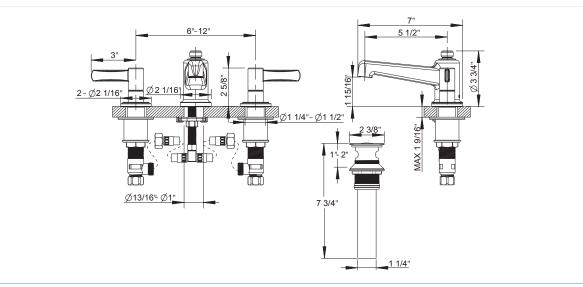



Darby floor-mount tub filler in Polished Chrome (15-05-PC) Palermo Petite bathtub (US-N4CCS)

Π


Tub faucets

DARBY DECK-MOUNT TUB FAUCET WITH HANDSHOWER TRIM

Solid brass construction	
Flühs quarter-turn ceramic disc cartridges	
Single-function handshower with vacuum break and 60" hose	er
Spout reach: 9-1/2"	
Spout swivel: No	
Handshower flow rate: 2.0 GPM at 80 PSI	
Inlet supply: 3/4" NPT	
Required rough (sold separately): DTHS-S-RGI	Н

Polished Chrome 15-03-T-PC Polished Nickel 15-03-T-PN Satin Nickel 15-03-T-SN



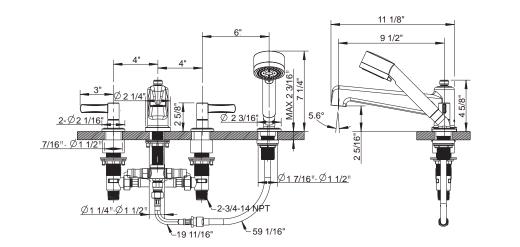

REQUIRED ROUGH



Deck tub set with hand shower rough


DTHS-S-RGH

See page 456 for detailed information

DARBY FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

ingle-handle operation with lever handle
olid brass construction
erox ceramic disc cartridge
ingle-function handshower with vacuum breaker nd 60" hose
ncludes rough
leight to spout: 29-11/16" - 31-15/16"
pout reach: 8-7/16"
pout swivel: No
ub filler flow rate: 4-5.85 GPM at 20-45 PSI
landshower flow rate: 2.5 GPM at 80 PSI

15-05-PN 15-05-SN

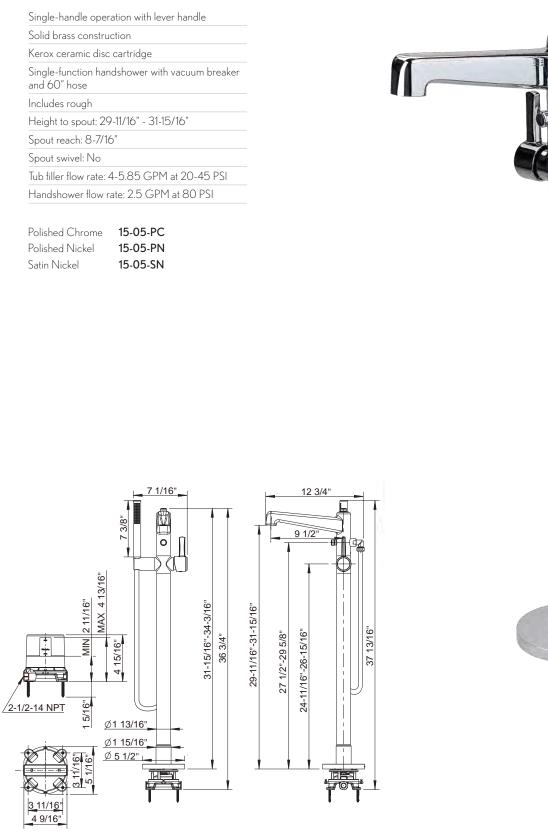

DARBY THERMOSTATIC VALVE TRIM

Temperature control only; volume control(s) sold separately
Vernet thermostatic cartridge
Flow rate: 10-12 GPM at 45 PSI
Required rough (sold separately): TH-RGH
Extension kit: 9Q1172CP-PC 9Q1172RN-PN 9Q1172AP-SN

Polished Chrome 15-16-T-PC Polished Nickel 15-16-T-PN Satin Nickel 15-16-T-SN

REQUIRED ROUGH



3/4" thermostatic valve rough

TH-RGH

See page 446 for detailed information



DARBY VOLUME CONTROL AND DIVERTER TRIM

Volume control controls on/off and volume functions for a single component in a shower system


Diverter alternates water flow between two or three water outlets

Flühs quarter-turn ceramic disc cartridge


Required rough (sold separately): VC-RGH - Volume control DIV-RGH - Two-way diverter 3DV-RGH - Three-way diverter Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 15-17-T-PC 15-17-T-PN Polished Nickel Satin Nickel 15-17-T-SN











REQUIRED ROUGH



3/4" volume control rough

VC-RGH



Two-way diverter rough

DIV-RGH




Three-way diverter rough


3DV-RGH

See pages 452-453 for detailed information

with 3DV-RGH, 3 function diverter



with DIV-RGH, 2 function diverter



DARBY DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL

One water outlet
Vernet thermostatic cartridge
Required rough (sold separately): TH1-RGH
Flow rate: 10-12 GPM at 45 PSI
Extension kit: 9Q242000CP 9Q242000RN 9Q242000AP

Polished Chrome**15-19-T-PC**Polished Nickel**15-19-T-SN**Satin Nickel**15-19-T-SN**

REQUIRED ROUGH



Dual-control thermostatic valve rough

TH1-RGH

See page 451 for detailed information



DARBY DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL AND DIVERTER

 Polished Chrome
 15-20-T - PC

 Polished Nickel
 15-20-T - PN

 Satin Nickel
 15-20-T - SN


REQUIRED ROUGH




Dual-control thermostatic valve rough


TH2-RGH

See page 451 for detailed information

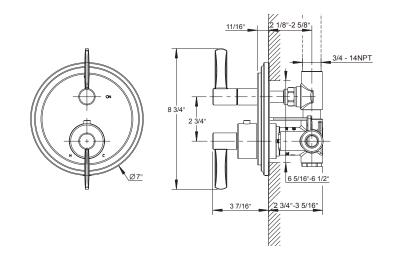







DARBY PRESSURE-BALANCE VALVE TRIM

One water outlet
Kerox pressure-balance cartridge
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 15-15P-T-PC Polished Nickel 15-15P-T-PN 15-15P-T-SN Satin Nickel

REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information



DARBY PRESSURE-BALANCE VALVE WITH DIVERTER TRIM

Two water outlets
Diverter alternates water flow between two outlets - tub spout/shower head, tub spout/handshower, shower head/handshower
Kerox pressure-balance cartridge
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBTS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 15-14P-T-PC Polished Nickel 15-14P-T-PN Satin Nickel 15-14P-T-SN


REQUIRED ROUGH




Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information







DARBY PRESSURE-BALANCE SHOWER SET TRIM

Set includes pressure-balance shower valve trim with lever handle and shower head with arm and flange
Kerox pressure-balance cartridge
Shower head features adjustable five-function spray
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 15-15-T-PC Polished Nickel 15-15-T-PN Satin Nickel 15-15-T-SN

REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information



DARBY PRESSURE-BALANCE TUB AND SHOWER SET TRIM

Set includes pressure-balance shower valve with diverter trim with lever handle, shower head with arm and flange and wall tub spout
Kerox pressure-balance cartridge
Shower head features adjustable five-function spray
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBTS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 15-14-T-PC Polished Nickel 15-14-T-PN 15-14-T-SN Satin Nickel


REQUIRED ROUGH



Pressure-balance shower valve with diverter rough


PBTS-RGH

See page 454 for detailed information









DARBY SHOWER HEAD WITH ARM AND FLANGE

Adjustable five-function spray EasyClean anti-limescale nozzles	
Includes swivel and arm and flange	
Maximum flow rate: 2.0 GPM at 80PSI	
Inlet connection size: 1/2" NPT	

Polished Chrome	15-21-PC
Polished Nickel	15-21-PN
Satin Nickel	15-21-SN



DARBY HANDSHOWER AND HOSE


Adjustable two-function spray Handshower features EasyClean anti-limescale nozzles Handshower includes vacuum breaker and flow restrictor 60" decorative metal hose included	Set includes handshower and hose	
nozzles Handshower includes vacuum breaker and flow restrictor	Adjustable two-function spray	
flow restrictor	5	Э
60" decorative metal hose included		
	60" decorative metal hose included	
Maximum flow rate: 2.0 GPM at 80 PSI	Maximum flow rate: 2.0 GPM at 80 PSI	

Polished Chrome15-34-PCPolished Nickel15-34-PNSatin Nickel15-34-SN

DARBY HANDSHOWER RAIL SET


Handshower features Ea nozzles	syClean anti-limescale
Handshower includes va restrictor	cuum breaker and flow
26" adjustable bar with k	pracket
60" decorative metal ho	se included
Maximum flow rate: 2.0	GPM at 80 PSI
Inlet connection size: 1/2	" NPT

Polished Chrome	15-31-PC
Polished Nickel	15-31-PN
Satin Nickel	15-31-SN

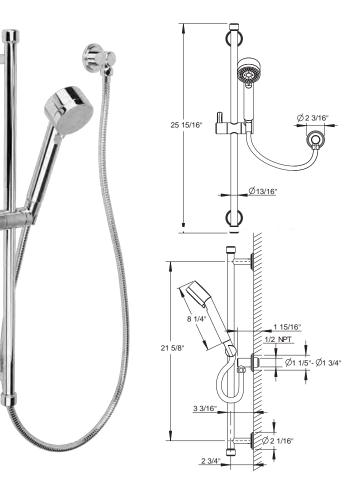

DARBY HANDSHOWER SLIDE RAIL

26" adjustable bar	with bracket	
Polished Chrome	15-32-PC	
Polished Nickel	15-32-PN	
Satin Nickel	15-32-SN	

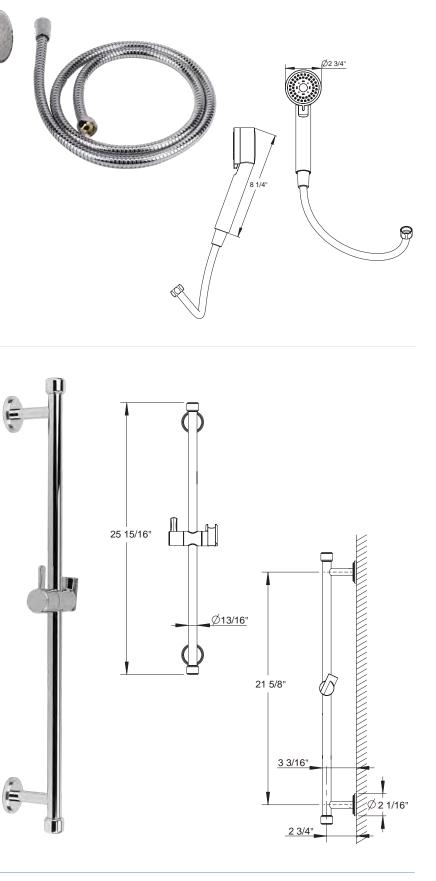

Outlets, brackets, wall tub spout & cover plate




Darby robe hook in Satin Nickel (15-51-SN)

Accessories

DARBY

DARBY PAPER HOLDER

Polished Chrome15-59-PCPolished Nickel15-59-PNSatin Nickel15-59-SN

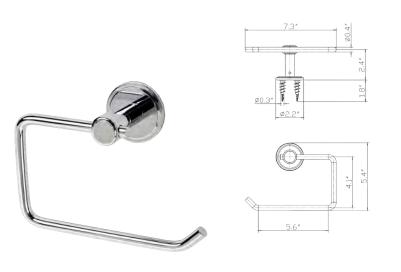


DARBY 18" TOWEL BAR

Polished Chrome	15-65-PC
Polished Nickel	15-65-PN
Satin Nickel	15-65-SN

Note: Bar cannot be cut

DARBY ROBE HOOK

Polished Chrome 15-51-PC Polished Nickel 15-51-PN Satin Nickel 15-51-SN

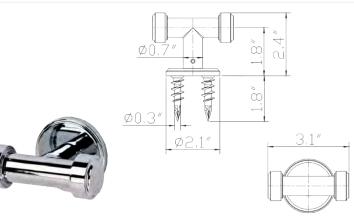


DARBY 24" TOWEL BAR

Polished Chrome	15-66-PC
Polished Nickel	15-66-PN
Satin Nickel	15-66-SN

Note: Bar cannot be cut

DARBY TOWEL RING


Polished Chrome15-55-PCPolished Nickel15-55-PNSatin Nickel15-55-SN

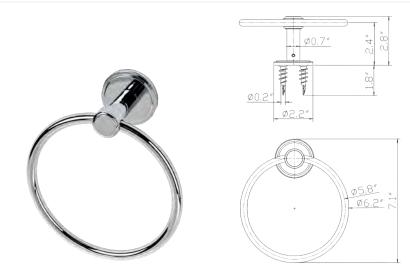

DARBY 30" TOWEL BAR

Polished Chrome	15-67-PC
Polished Nickel	15-67-PN
Satin Nickel	15-67-SN

Note: Bar cannot be cut

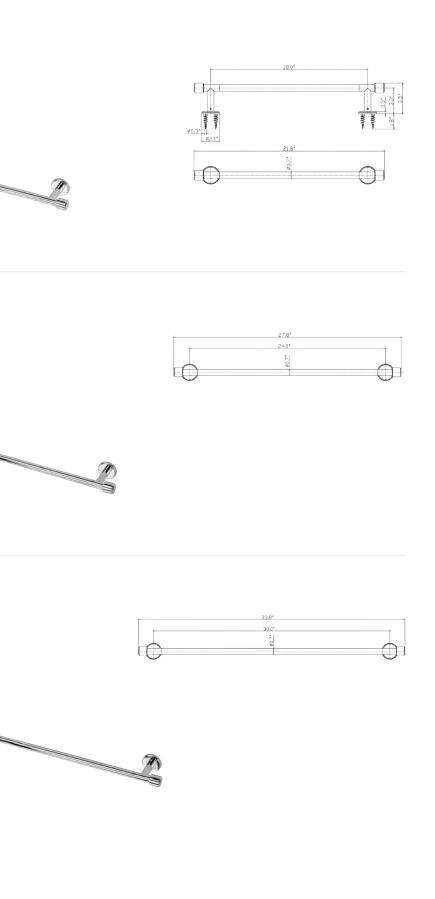



Darby widespread basin faucet in Satin Nickel (11-08-SN)



Darby floor-mount tub filler in Polished Nickel (15-05-PC) Nuvola bathtub (US-N22CS)

Darby floor-mount tub filler in Polished Nickel (15-05-PC) Nuvola bathtub (US-N22CS) 57







TAOS

TAOS SINGLE-HOLE BASIN FAUCET

Solid brass construction	
Kerox ceramic disc cartridge	
Push drain assembly included	
Spout reach: 5-3/4"	
Spout swivel: Yes	
Maximum flow rate: 1.2 GPM at 60 PSI	
4" cover plate available (sold separately)	

Polished Chrome17-01-PCPolished Nickel17-01-PNSatin Nickel17-01-SNBronze17-01-BZ

TAOS ESSENTIAL. PURE. FORM.


Inspired by the mid-century modern classic, Eero Saarinen's Tulip table, Taos embodies a simplistic and organic elegance. With arching, structural curves and clean lines, Taos takes center stage with a heightened yet soft aesthetic.

AVAILABLE FINISHES



Polished Chrome








Polished Nickel

Satin Nickel

Bronze

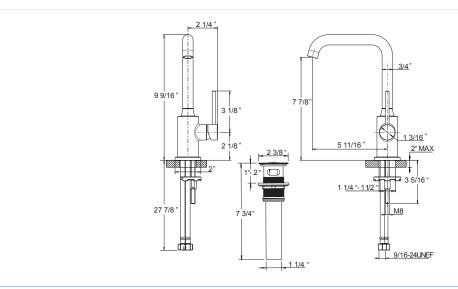

296



Basin faucets

TAOS WIDESPREAD BASIN FAUCET

Solid brass construction	
Flühs quarter-turn ceramic disc cartridges	
Push drain assembly included	
Spout reach: 5-1/2"	
Spout swivel: No	
Handle spread: 6" - 12"	
Maximum flow rate: 1.2 GPM at 60 PSI	

Polished Chrome	17-08-PC
Polished Nickel	17-08-PN
Satin Nickel	17-08-SN
Bronze	17-08-BZ



TAOS DECK-MOUNT TUB FAUCET TRIM

Solid brass construction	
Flühs quarter-turn ceramic disc cartridge	es
Spout reach: 9"	
Spout swivel: No	
Inlet supply: 3/4" NPT	
Required rough (sold separately): DT-S-R	RGH


 Polished Chrome
 17-02-T-PC


 Polished Nickel
 17-02-T-PN

 Satin Nickel
 17-02-T-SN

 Bronze
 17-02-T-BZ



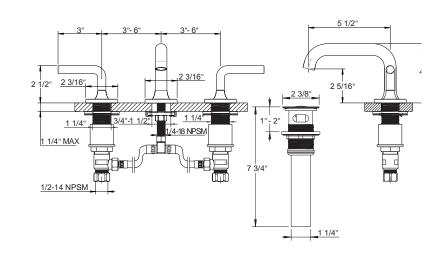



REQUIRED ROUGH




Deck tub set rough

DT-S-RGH

See page 456 for detailed information





Tub faucets

E

REQUIRED ROUGH

T

Ĵ

-

Deck tub set with hand shower rough

See page 456 for detailed information

DTHS-S-RGH

TAOS DECK-MOUNT TUB FAUCET WITH HANDSHOWER TRIM

Solid brass construction	
Flühs quarter-turn ceramic disc cartridges	
Single-function handshower with vacuum break and 60" hose	er
Spout reach: 9"	
Spout swivel: No	
Handshower flow rate: 2.5 GPM at 80 PSI	
Inlet supply: 3/4" NPT	
	-


Polished Chrome 17-03-T-PC Polished Nickel 17-03-T-PN 17-03-T-SN Satin Nickel 17-03-T-BZ Bronze




TAOS FLOOR-MOUNT TUB FILLER WITH HANDSHOWER

Solid brass	construction
Kerox cerai	mic disc cartridge
Single-func and 60" hc	tion handshower with vacuum breaker se
Includes ro	ugh
Height to s	pout: 33-3/4" - 35-7/8"
Spout reacl	n: 9″
Spout swive	el: Yes
Tub filler flo	w rate: 4-6 GPM at 20-45 PSI
Handshow	er flow rate: 2.5 GPM at 80 PSI

Polished Chrome 17-05-PC Polished Nickel 17-05-PN Satin Nickel 17-05-SN 17-05-BZ Bronze

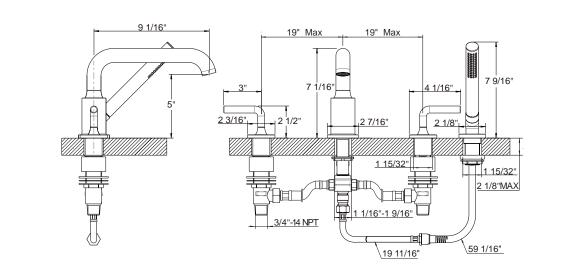

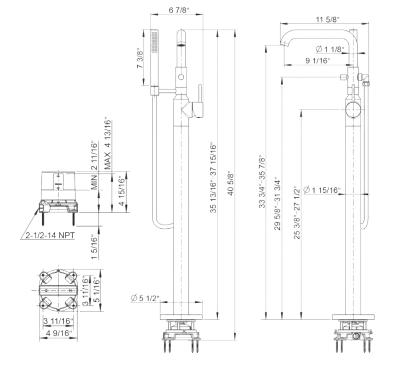





TAOS THERMOSTATIC VALVE TRIM

Temperature control only; volume control(s) sold separately
Vernet thermostatic cartridge
Flow rate: 10-12 GPM at 45 PSI
Required rough (sold separately): TH-RGH
Extension kit: 9Q1172CP-PC 9Q1172RN-PN 9Q1172AP-SN 9Q1172FO-BZ

Polished Chrome17.16-T-PCPolished Nickel17.16-T-PNSatin Nickel17.16-T-SNBronze17.16-T-BZ

REQUIRED ROUGH



3/4" thermostatic valve rough

TH-RGH

See page 450 for detailed information



TAOS VOLUME CONTROL AND DIVERTER TRIM

Volume control controls on/off and volume functions for a single component in a shower system

Diverter alternates water flow between two or three water outlets


Flühs quarter-turn ceramic disc volume control cartridge / Kerox diverter cartridge


Required rough (sold separately): VC-RGH - Volume control DIV-RGH - Two-way diverter 3DV-RGH - Three-way diverter

Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome	17-17-T-PC
Polished Nickel	17-17-T-PN
Satin Nickel	17-17-T-SN
Bronze	17-17-T-BZ







REQUIRED ROUGH



3/4" volume control rough

VC-RGH



Two-way diverter rough


DIV-RGH



Three-way diverter rough

3DV-RGH

See pages 452-453 for detailed information



TAOS DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL

One water outlet

/ernet thermostatic cartridge	
low rate: 10-12 GPM at 45 PSI	
Required rough (sold separately): TH1-RGH	
xtension kit:	
Q242000CP	
Q242000RN	
Q242000AP	
Q242000FO	

Polished Chrome	17-19-T-PC
Polished Nickel	17-19-T-PN
Satin Nickel	17-19-T-SN
Bronze	17-19-T-BZ

REQUIRED ROUGH



Dual-control thermostatic valve rough

TH1-RGH

See page 451 for detailed information



TAOS DUAL-CONTROL THERMOSTATIC VALVE TRIM WITH VOLUME CONTROL AND DIVERTER

Two water outlets
Vernet thermostatic cartridge
Flow rate: 10-12 GPM at 45 PSI
Required rough (sold separately): TH2-RGH
Extension kit: 9Q242000CP 9Q242000RN 9Q242000AP 9Q242000FO

Polished Chrome	17-20-T-PC
Polished Nickel	17-20-T-PN
Satin Nickel	17-20-T-SN
Bronze	17-20-T-BZ


REQUIRED ROUGH




Dual-control thermostatic valve rough

TH2-RGH

See page 451 for detailed information

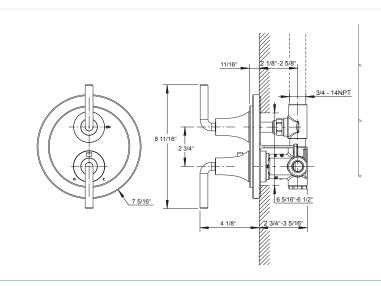





TAOS PRESSURE-BALANCE VALVE TRIM

One water outlet
Kerox pressure-balance cartridge
Flow rate: 3-5 GPM at 45 PSI
Required rough (sold separately): PBS-RGH
Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 17-15P-T-PC Polished Nickel 17-15P-T-PN 17-15P-T-SN Satin Nickel Bronze 17-15P-T-BZ

REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information



TAOS PRESSURE-BALANCE VALVE WITH DIVERTER TRIM

Two water outlets	
Diverter alternates water flow between two o - tub spout/shower head, tub spout/handsho shower head/handshower	anots
Kerox pressure-balance cartridge	
Flow rate: 3-5 GPM at 45 PSI	
Required rough (sold separately): PBTS-RGI	-
Extension kit: 5T1C0319NT + 5P0C0582N	JT

Polished Chrome	17-14P-T-PC
^D olished Nickel	17-14P-T-PN
Satin Nickel	17-14P-T-SN
Bronze	17-14P-T-BZ
Bronze	17-14P-T-BZ


REQUIRED ROUGH




Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information

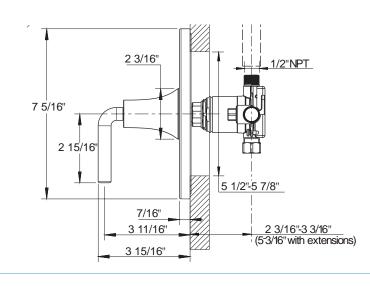

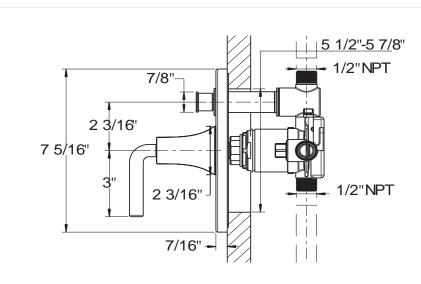



TAOS PRESSURE-BALANCE SHOWER SET TRIM

Set includes pressure-balance shower valve trim with lever handle and shower head with arm and flange Kerox pressure-balance cartridge Shower head features adjustable five-function spray Flow rate: 3-5 GPM at 45 PSI Required rough (sold separately): PBS-RGH Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 17-15-T-PC 17-15-T-PN Polished Nickel Satin Nickel 17-15-T-SN Bronze 17-15-T-BZ


REQUIRED ROUGH



Pressure-balance shower valve rough

PBS-RGH

See page 453 for detailed information

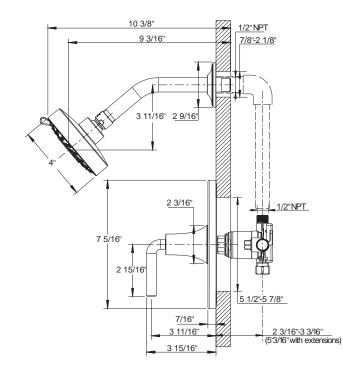



TAOS PRESSURE-BALANCE TUB AND SHOWER SET TRIM

Set includes pressure-balance shower valve with
diverter trim with lever handle, shower head with arm
and flange and wall tub spout

Kerox pressure-balance cartridge


Shower head features adjustable five-function spray

Flow rate: 3-5 GPM at 45 PSI

Required rough (sold separately): PBTS-RGH Extension kit: 5T1C0319NT + 5P0C0582NT

Polished Chrome 17-14-T-PC

1/11/11/0
17-14-T-PN
17-14-T-SN
17-14-T-BZ

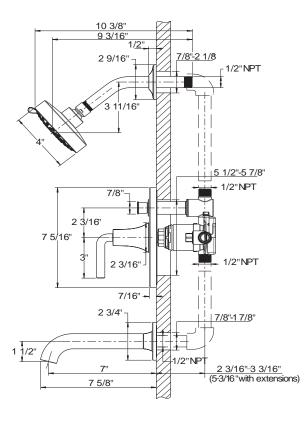

REQUIRED ROUGH



Pressure-balance shower valve with diverter rough

PBTS-RGH

See page 454 for detailed information







Polished Nickel

Satin Nickel

Bronze


TAOS SHOWER HEAD WITH ARM AND FLANGE

EasyClean anti-limescale no	zzles
Includes swivel and arm and	flange
Maximum flow rate: 2.0 GPI	М
Inlet connection size: 1/2" N	PT

17-21-PN

17-21-SN

17-21-BZ

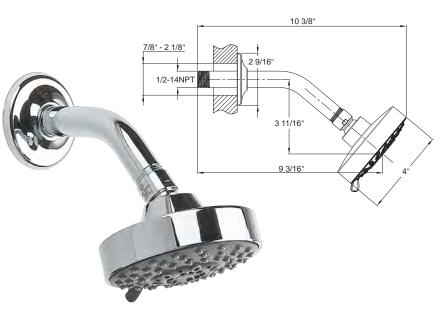

EF

1

TAOS HANDSHOWER RAIL SET

Single-function spray	
Handshower features EasyClean anti-limescal nozzles	9
Handshower includes vacuum breaker and flow restrictor	
24" adjustable bar with bracket	
60" decorative metal hose included	
Maximum flow rate: 2.5 GPM at 80 PSI	
Inlet connection size: 1/2" NPT or 3/4" NPT, adapter included	

17-31-SN

17-31-BZ

23 15/16"
2 1/8" 7 7/8" 21 5/8"
2 7/16"

TAOS HANDSHOWER AND HOSE

Single-function spray
Handshower features EasyClean anti-limescale nozzles
Handshower includes vacuum breaker and flow restrictor
60" decorative metal hose included
Maximum flow rate: 2.5 GPM @ 80 PSI



Polished Chrome	17-34-PC
Polished Nickel	17-34-PN
Satin Nickel	17-34-SN
Bronze	17-34-BZ

TAOS WALL BRACKET WITH OUTLET

Inlet connection size: 1/2" NPT

Polished Chrome 17-35-PC Polished Nickel 17-35-PN 17-35-SN Satin Nickel



TAOS WALL TUB SPOUT

Spout reach: 7"	1
Inlet connection size: 1/2" NPT	

Polished Chrome	17-WTS-PC
Polished Nickel	17-WTS-PN
Satin Nickel	17-WTS-SN
Bronze	17-WTS-BZ

COVER PLATE

4" centerset cover plate

Polished Chrome 9Q1168CP-PC Polished Nickel 9Q1168RN-PN Satin Nickel 9Q1168AP-SN 9Q1168FO-BZ Bronze



Satin Nickel

Bronze

Accessories





Taos robe hook in Satin Nickel (17-51-SN)











SHOWERING





SOLID BRASS CONSTRUCTION COMBINED WITH EXPERT ENGINEERING

Delivering seamless movement of water in a refined collection. An extensive range of shower heads, shower arms, handsets and hoses ensures the very best in performance and functionality to create a highly luxurious experience that is uniquely tailored to the individual.

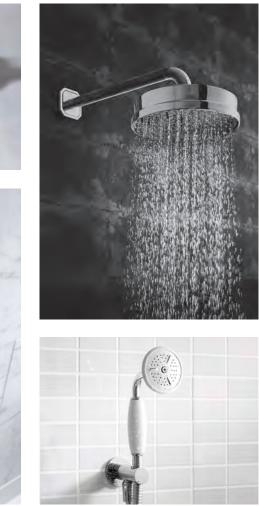

WALDORF 8" RAIN HEAD

Solid brass

Single rain spray

EasyClean, anti-limescale nozzles Can be wall or ceiling mounted using the appropriate shower arm (sold separately)


Swivel: No

Maximum flow rate: 2.5 GPM

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

Polished ChromeUS-WF08C_ECPolished NickelUS-WF08N_EC

Shower heads





Solid brass

Single rain spray

Can be wall or ceiling mounted using the appropriate shower arm (sold separately) Swivel: No


Maximum flow rate: 2.5 GPM

Inlet connection size: G 1/2" (compatible with

1/2" NPT)

Polished Chrome US-WF12C Polished Nickel US-WF12N







Shower heads

SHOWERING

BELGRAVIA 8" RAIN HEAD

Solid brass

Single rain spray

EasyClean, anti-limescale nozzles

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Swivel: No

Maximum flow rate: 2.5 GPM

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

BELGRAVIA 12" RAIN HEAD

Solid brass
Single rain spray
Can be wall or ceiling mounted using the appropriate shower arm (sold separately)
Świvel: No
Maximum flow rate: 2.5 GPM
nlet connection size: G 1/2" (compatible with /2" NPT)

ARCADE 9" AIR BOOST RAIN HEAD

Featuring air boost technology which infuses the water with air creating droplets that are dense but light and soft, while maintaining superior pressure Solid brass

Single rain spray

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Swivel: Yes

Maximum flow rate: 1.75 GPM

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

ARCADE 13" AIR BOOST RAIN HEAD

Featuring air boost technology which infuses the water with air creating droplets that are dense but light and soft, while maintaining superior pressure

Solid brass

Single rain spray

Can be wall or ceiling mounted using the appropriate shower arm (sold separately)

Swivel: Yes


Maximum flow rate: 1.75 GPM


Inlet connection size: G 1/2" (compatible with 1/2" NPT)

Polished Chrome US-FH08C_EC Polished Nickel US-FH08N_EC

US-FH12C

US-FH12N






Polished Chrome US-ARCV17C Polished Nickel

Polished Chrome


Polished Nickel

US-ARCV17N



Polished Chrome US-ARCV60C Polished Nickel US-ARCV60N






MODERN 8" RAIN HEAD

Solid brass	Polished Chrome
Single rain spray	Polished Nickel
EasyClean anti-limescale nozzles	Stainless
Can be wall or ceiling mounted using the appropriate shower arm (sold separately)	Matte Black Brushed Brass
Swivel: Yes	
Maximum flow rate: 2.0 GPM	
Inlet connection size: G 1/2" (compatible with 1/2" NPT)	

MODERN 12" RAIN HEAD

Solid brass	Polishe
Single rain spray	Polishe
EasyClean anti-limescale nozzles	Stainle
Can be wall or ceiling mounted using the appropriate shower arm (sold separately)	- Matte Brushe
Swivel: Yes	
Maximum flow rate: 2.5 GPM	-
lalat connection cize: C 1/2" (compatible with	

Inlet connection size: G 1/2" (compatible with 1/2" NPT)

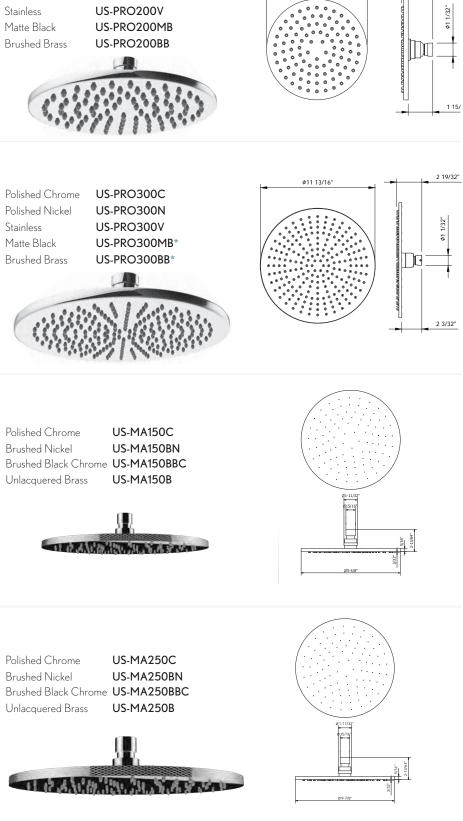

US-PRO200C


US-PRO200N

UNION 5-5/8" SHOWER HEAD

Solid brass	
Single rain spray	
EasyClean anti-limescale nozzles	
Shower arm and flange sold separately (US-SH004)	
5-5/8" diameter	
Maximum flow rate: 1.75GPM	
Inlet connection size: G 1/2" (compatible with 1/2" NPT)	
Swivel: Yes	

UNION 10" SHOWER HEAD

Solid brass, single ra	n spray
EasyClean anti-limes	scale nozzles
Shower arm and flang	e sold separately (US-SH004)
9-7/8" diameter	
Maximum flow rate: 2	2.0 GPM
Inlet connection size NPT)	G 1/2" (compatible with 1/2"
Swivel: Yes	

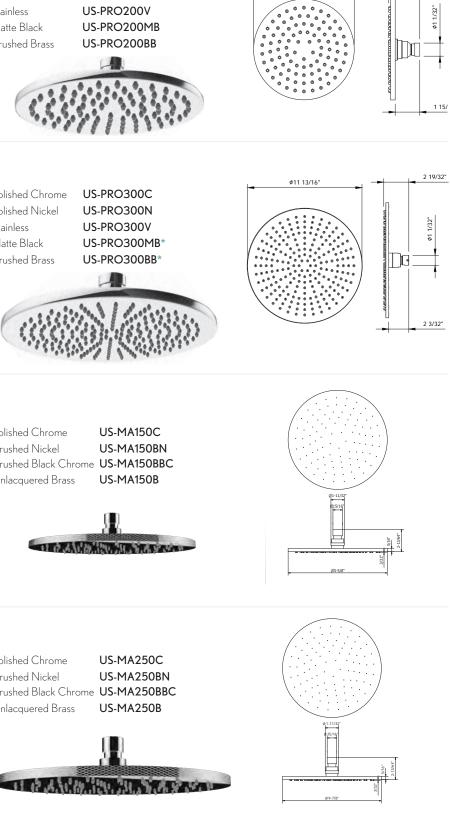

*6-WEEK LEADTIME

324

2 7/16"

¢7 7/8"

Shower heads

SHOWERING


BEREA SHOWER HEAD WITH ARM AND FLANGE

EasyClean anti-lim	escale nozzles		7/8" - 2 1/8"
Includes swivel and	d arm and flange		1/2-14NPT
Maximum flow rate	e: 2.0 GPM		
Inlet connection siz	ze: 1/2"		
Polished Chrome	11-21-PC		
Polished Nickel	11-21-PN	- Aller	9 1/2"
Satin Nickel	11-21-SN		·
Bronze	11-21-BZ	Your	

LEYDEN SHOWER HEAD WITH ARM AND FLANGE


Adjustable five-fund	ction spray
EasyClean anti-lime	escale nozzles
Includes swivel and	arm and flange
Maximum flow rate	: 2.0 GPM
Inlet connection siz	e: 1/2"
Polished Chrome	14-21-PC

Polished Nickel 14-21-PN 14-21-SN Satin Nickel Bronze 14-21-BZ

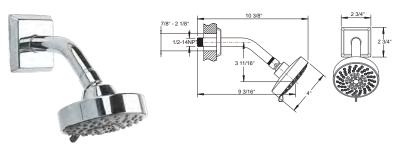

DARBY SHOWER HEAD WITH ARM AND FLANGE


Adjustable five-fund	ction spray	
EasyClean anti-lime	escale nozzles	
Includes swivel and	arm and flange	
Maximum flow rate	: 2.0 GPM	
Inlet connection siz	e: 1/2"	
Polished Chrome Polished Nickel Satin Nickel	15-21-PC 15-21-PN 15-21-SN	

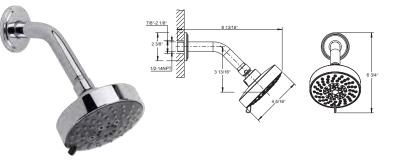

TAOS SHOWER HEAD WITH ARM AND FLANGE

Adjustable five-function spray
EasyClean anti-limescale nozzles
Includes swivel, arm and flange
Maximum flow rate: 2.0 GPM
Inlet connection size: 1/2"

Polished Chrome 17-21-PC Polished Nickel 17-21-PN 17-21-SN Satin Nickel 17-21-BZ Bronze

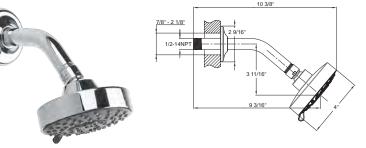

ELEMENTS 8-JET SHOWER HEAD

Solid brass	
Adjustable spray - wide to narrow rain	
Anti-limescale nozzles	
Wall-mounted using shower arm (sold separately)	 Polished Chrom Polished Nickel
3-1/2" diameter	Stainless
Swivel: Yes	 Matte Black Brushed Brass
Maximum flow rate: 1.75 GPM	 Brushed Drass Brushed Nickel
Inlet connection type: 1/2" NPT	Brushed Black (

WALDORF SHOWER ARM AND FLANGE

Solid brass		
Hexagonal flange		
Projection: 5-3/4"		
Inlet connection type	e: 1/2″ male NPT	
Polished Chrome Polished Nickel	US-WF664C US-WF664N	

BELGRAVIA SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	e: 1/2" male NPT	
Polished Chrome	US-BL664C	
Polished Nickel	US-BL664N	

ARCADE SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	oe: 1/2" male NPT	
Polished Chrome	US-ARC064C	
Polished Nickel	US-ARC064N	

MODERN SHOWER ARM AND FLANGE

Solid brass		
Round flange		
Projection: 5-3/4"		
Inlet connection typ	pe: 1/2" male NPT	

Polished Chrome	US-PRO664C
Polished Nickel	US-PRO664N
Stainless	US-PRO664S
Matte Black	US-PRO664MB*

*6-WEEK LEADTIME



326



SHOWERING

Projection: 7-3/4"	
Inlet connection siz	e: 1/2" male NPT
Polished Chrome	US-PRO689C
Polished Nickel	US-PRO689N
Stainless	US-PRO689V
Matte Black	US-PRO689MB
Brushed Brass	US-PRO689BB

Solid brass		
Projection: 13"		
Inlet connection siz	e: 1/2" male NPT	
Polished Chrome	US-FH684C	
Polished Nickel	US-FH684N	
Stainless	US-FH684V	



Solid brass			
Solid brace	C	b L	1
		hd.	hrace

Projection: 11" Height: 3-5/8"

Solid Brass Projection: 15-3/4



Brushed Nickel Unlacquered Brass US-SH400B



Handshowers

SHOWERING

WALDORF HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray
Wall bracket includes vacuum breaker
Handshower hose length: 60"
Flange size: 2-1/8" x 2-1/8"
Shower face size: 3-1/2"
Maximum flow rate: 2.0 GPM
Inlet connection: 1/2" NPT

Metal

Polished Chrome US-WF964C Polished Nickel US-WF964N

Metal with black insert

Polished Chrome US-WF964C_B Polished Nickel US-WF964N_B


Metal with white insert

Polished Chrome US-WF964C_W Polished Nickel US-WF964N_W

BELGRAVIA HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Metal

Single spray Wall bracket include	es vacuum breaker		
Handshower hose l	Handshower hose length: 60"		
Flange size: 2-1/8" x 2-1/8"			
Shower face size: 3"			
Maximum flow rate: 2.0 GPM			
Inlet connection: 1/2	2" NPT		
Polished Chrome	US-BL964C		



Metal with black insert Metal with white insert ""

ARCADE HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray		
Wall bracket includes v breaker	acuum	
Handshower hose length: 60"		
Flange size: 2-1/8" x 2-1/8"		
Shower face size: 4-1/8	3"	
Maximum flow rate: 1.75 GPM		
Inlet connection: 1/2" N	NPT	
	IS-ARC963C IS-ARC963N	



UNION HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray
Wall bracket includes vacuum breaker
Handshower hose length: 60"
Flange size: 2"
Maximum flow rate: 1.75 GPM
Inlet connection: 1/2" NPT

Polished Chrome US-UN964C Brushed Nickel US-UN964BN Brushed Black Chrome US-UN964BBC Unlacquered Brass US-UN964B

MODERN ROUND HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET

Single spray
Wall bracket includes vacuum breaker
Handshower hose length: 60"
Flange size: 2"
Maximum flow rate: 2.0 GPM
Inlet connection: 1/2" NPT


Polished Chrome	US-PRO963C
Polished Nickel	US-PRO963N
Stainless	US-PRO963V
Matte Black	US-PRO963ME
Brushed Brass	US-PRO963BB

MODERN SQUARE HANDSHOWER SET WITH HOSE AND BRACKET WITH OUTLET


Single spray	
Wall bracket includes vacuum breaker	
Handshower hose length: 60"	
Flange size: 1-1/2" x 1-1/2"	
Maximum flow rate: 2.0 GPM	
Inlet connection: 1/2" NPT	
Polished Chrome US-SK962C	


Polished Nickel US-SK962N Stainless US-SK962V









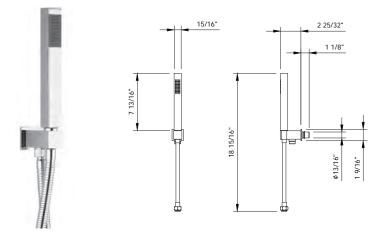



SHOWERING

BELGRAVIA HANDSHOWER RAIL

Length: 25-3/4"

Polished Chrome US-BL850C Polished Nickel US-BL850N

MODERN ROUND HANDSHOWER RAIL

Length: 26-3/4""


Polished Chrome US-PRO850C Polished Nickel Stainless Matte Black Brushed Brass

US-PRO850N US-PRO850V US-PRO850MB US-PRO850BB

MODERN SQUARE HANDSHOWER RAIL

Length: 27-3/4"

Polished Chrome US-SK850C Stainless US-SK850V

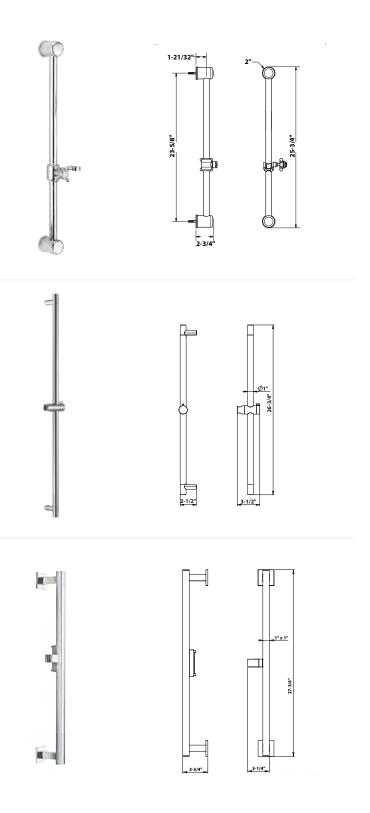

Polished Nickel

Satin Nickel

Bronze

Handshowers

SHOWERING

BEREA HANDSHOWER RAIL SET


Set includes handshower, hose, slide rail and wall outlet		
Single-function spray		
Handshower features EasyClean anti-limescale nozzles		
Handshower includes vacuum breaker and flow restrictor		
26" adjustable bar with bracket		
60" decorative metal hose included		
Maximum flow rate: 2.5 GPM at 80 PSI		
Inlet connection size: 1/2" NPT or 3/4" NPT, adapter included		

11-31-PN

11-31-SN

11-31-BZ

FB

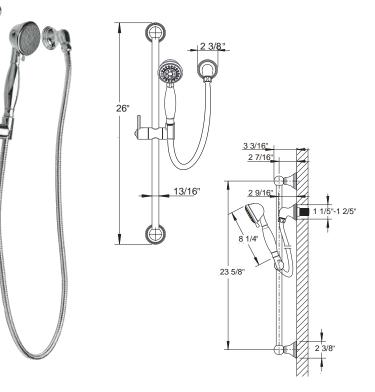

DARBY HANDSHOWER RAIL SET

Hand nozzl	shower features EasyClean anti-limescale es
Hand restric	shower includes vacuum breaker and flow ctor
26″ a	djustable bar with bracket
60″ c	lecorative metal hose included
Maxir	num flow rate: 2.0 GPM at 80 PSI
Inlet c	connection size: 1/2" NPT

Polished Chrome 15-31-PC Polished Nickel 15-31-PN Satin Nickel 15-31-SN


TAOS HANDSHOWER RAIL SET

Set includes handsh and wall outlet	iower, hose, slide rail
Single-function spra	у
Handshower feature nozzles	es EasyClean anti-limescale
Handshower includ flow restrictor	es vacuum breaker and
24" adjustable bar v	with bracket
60" decorative met	al hose included
Inlet connection size adaptor included	e: 1/2" NPT or 3/4" NPT,


Collsned Chrome	17-31-PC
^D olished Nickel	17-31-PN
Satin Nickel	17-31-SN
Bronze	17-31-BZ

LEYDEN HANDSHOWER RAI	L SET
-----------------------	-------


14-31-BZ

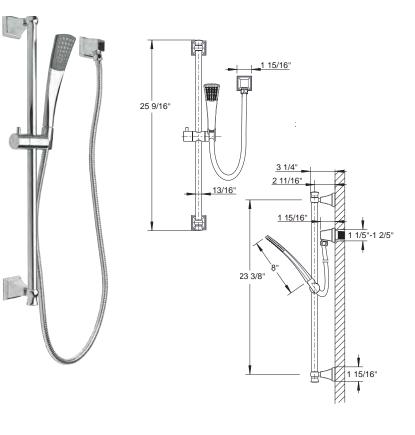

Bronze

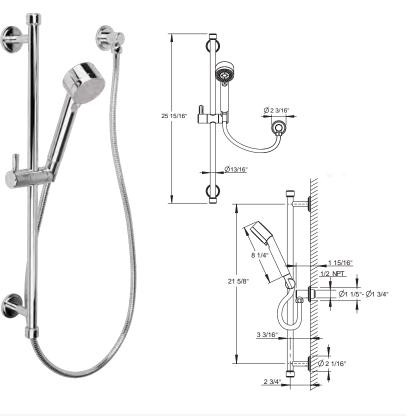



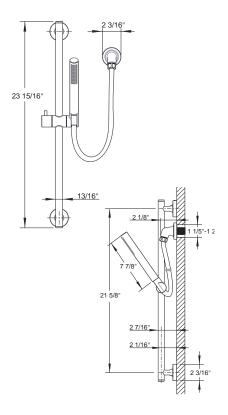

WALDORF 23-5/8" PEDESTAL BASIN

Overall size: W 23-5/8" x D 21-5/8" x

H 35-1/2"

Material: Fireclay

Set comprised of basin and pedestal Basin is pre-drilled with three faucet holes

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied).

Required overflow cover sold separately (US-WFOV)

Waldorf 23-5/8" three-hole basin, white **US-WF0613SCW**

Waldorf pedestal base, white US-WF0101CW

REQUIRED OVERFLOW COVER



Waldorf overflow trim

US-WFOVC Polished Chrome US-WFOVN Polished Nickel


BASINS



SINGLE OR DOUBLE. ON A PEDESTAL OR LEGS OF DISTINCTION.

Our basins beckon renewal. Using only the finest vitreous china, Italian fireclay, and brassware components, find long-lasting quality and style in every piece. Your daily ritual met with uncompromising design and beauty.





WALDORF 31-1/2" BASIN CONSOLE SET

Overall size: W 31-1/2" x D 21-5/8" x H 35-1/2"

Material: Fireclay

Set comprised of basin and metal console Solid brass decorative console with functional bars

affixed to the wall

Basin is pre-drilled with three faucet holes Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied).

Required overflow cover sold separately (US-WFOV)

Waldorf 31" three-hole basin, white **US-WF0813SCW**

Waldorf 31" console legs, polished chrome **US-WF80X81C**

Waldorf 31" console legs, polished nickel **US-WF80X81N**

REQUIRED OVERFLOW COVER



 $10^{1}/_{16}"$

31¹/2″


 $\begin{bmatrix} 0 & 0 \end{bmatrix}$

 \bigcirc

Waldorf overflow trim

US-WFOVC Polished Chrome US-WFOVN

Polished Nickel

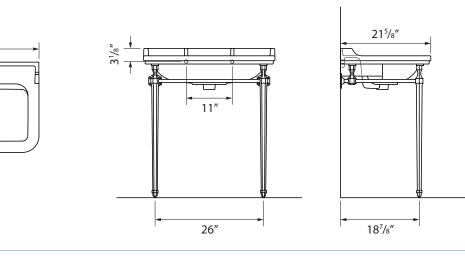



Basins

WALDORF 39-1/2" BASIN CONSOLE SET

Overall size: W 39-3/8" x D 21-5/8" x H 35-1/2"

Material: Fireclay

Set comprised of basin and metal console

Solid brass decorative console with functional bars affixed to the wall

Basin is pre-drilled with three faucet holes

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied).

Required overflow cover sold separately (US-WFOV)

Waldorf 39" three-hole basin, white **US-WF1003SCW**

Waldorf 39" console legs, polished chrome **US-WF100X81C**


Waldorf 39" console legs, polished nickel **US-WF100X81N**

REQUIRED OVERFLOW COVER




Waldorf overflow trim

US-WFOVC Polished Chrome US-WFOVN Polished Nickel



3¹/₈"



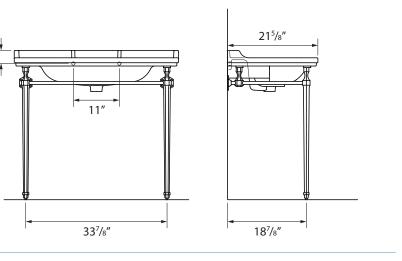

Basins

WALDORF 59" DOUBLE BASIN CONSOLE SET

Basins are pre-drilled with three faucet holes

wall-hung installation not supplied).

(US-WFOV)

Required overflow cover sold separately

Basin is suitable for wall-hung installation with or

without underside support (mounting hardware for

Overall size: W 59" x D 21-5/8" x H 35-1/2"

Material: Fireclay

Set comprised of double basin and metal console Solid brass decorative console with functional bars affixed to the wall

Waldorf 59" three-hole double basin, white **US-WF1503SCW**

Waldorf 59" console legs, polished chrome US-WF150X81C

Waldorf 59" console legs, polished nickel US-WF150X81N



EDWARDIAN 22" PEDESTAL BASIN

Overall size: W 22" x D 18-1/2" x H 35-1/2"

Material: Vitreous china

Set comprised of basin and pedestal

Basin is pre-drilled for one or three faucet holes

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied).

Edwardian 22" single-hole basin, white $\ensuremath{\textbf{US-B41TH}}$

Edwardian 22" three-hole basin, white **US-B43TH**


Edwardian pedestal base, white **US-P1**


REQUIRED OVERFLOW COVER





Waldorf overflow trim


US-WFOVC Polished Chrome US-WFOVN Polished Nickel



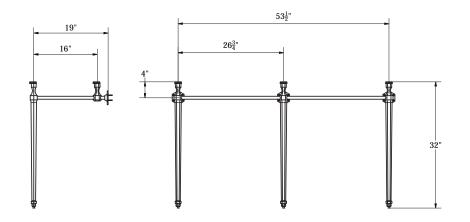





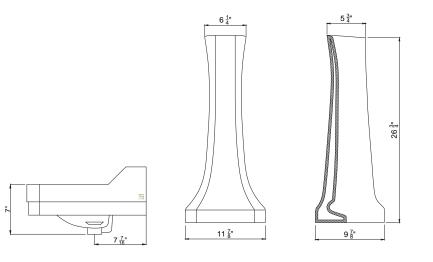



Basins

CLASSIC 25" BASIN CONSOLE

Overall size: W 25-5/8" x D 22-3/8" x H 35-1/8" Material: Vitreous china Set comprised of basin and metal console Solid brass decorative console with functional bars affixed to the wall Basin is pre-drilled for one or three faucet holes Basin is not suitable for wall-hung installation

without underside support

Classic 25" single-hole basin, white **US-B151TH**

Classic 25" three-hole basin, white **US-B153TH**

Classic console legs, polished chrome
US-T49ACHR

Classic console legs, polished nickel **US-T49ANKL**

Console extension kit

Classic console 2-3/8" extension kit, polished chrome US-T49ACHR-EXT

Classic console 2-3/8" extension kit, polished nickel US-T49ANKL-EXT



CLASSIC 25" PEDESTAL BASIN

Overall size: W 25-5/8" x D 22-3/8" x H 36-1/4"

Material: Vitreous china

Set comprised of basin and pedestal


Basin is pre-drilled for one or three faucet holes


Basin is not suitable for wall-hung installation without underside support (mounting hardware for wall-hung installation not supplied).

Classic 25" single-hole basin, white **US-B151TH**

Classic 25" three-hole basin, white **US-B153TH**

Classic pedestal base, white **US-P6**

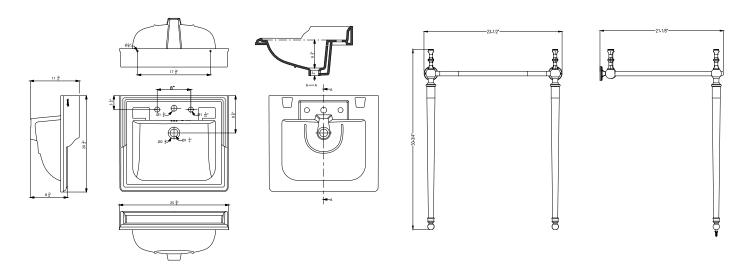

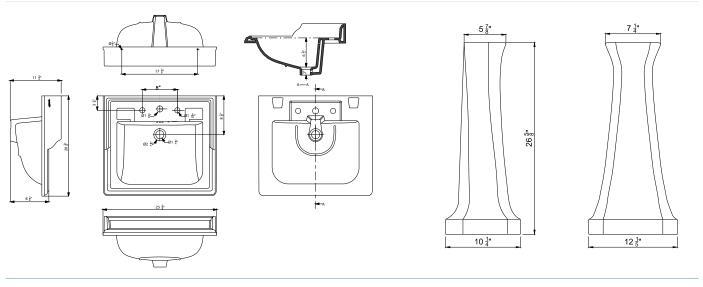



ARCADE 24" PEDESTAL BASIN

Overall size: W 23-3/4" x D 20-5/8" x H 33"

Material: Fireclay

Set comprised of basin and pedestal

Basin is pre-drilled with one or three faucet holes


Includes both polished chrome and polished nickel overflow covers

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)


Arcade 24" single-hole basin, white **US-ARC6001TH**

Arcade 24" three-hole basin, white **US-ARC6003TH**

Arcade pedestal, white **US-ARC1**



Arcade widespread basin faucet with white lever handles in Polished Chrome (US-ARC15DPC_WLV) Arcade 36" basin (US-ARC9003TH) 

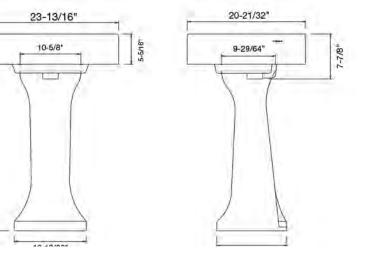

Basins

ARCADE 24" CONSOLE SET

Overall size: W 23-3/4" x D 20-5/8" x H 33"

Material: Fireclay

Set comprised of basin and pedestal

Basin is pre-drilled with one or three faucet holes Includes both polished chrome and polished nickel overflow covers

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)

Arcade 24" single-hole basin, white **US-ARC6001TH**

Arcade 24" three-hole basin, white **US-ARC6003TH**

Arcade console legs (pair), white **US-ARC2**



ARCADE 24" CONSOLE SET

Overall size: W 23-3/4" x D 20-5/8" x H 33" Set comprised of fireclay basin and metal console

with safety glass shelf Basin is pre-drilled with one or three faucet holes

Includes both polished chrome and polished nickel overflow covers


Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)

Arcade 24" single-hole basin, white **US-ARC6001TH**


Arcade 24" three-hole basin, white **US-ARC6003TH**


Arcade 24" console base with glass shelf, polished chrome **US-ARC22C**

Arcade 24" console base with glass shelf, polished nickel **US-ARC22N**

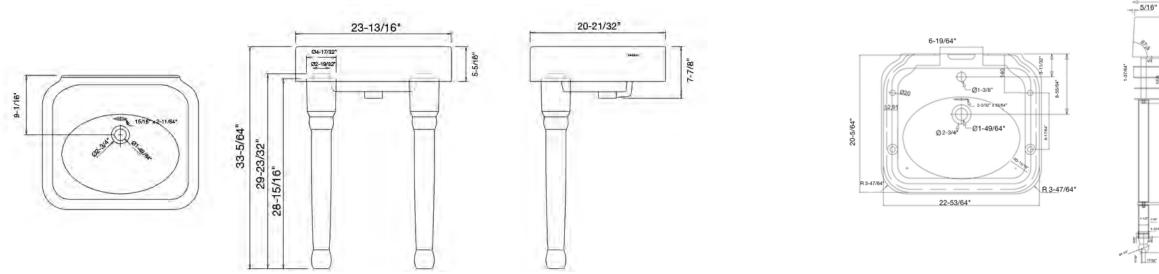









FIXTURES

ARCADE 36" PEDESTAL BASIN

Overall size: W 35-3/4" x D 21-5/8" x H 33"

Material: Fireclay

Set comprised of basin and pedestal

Basin is pre-drilled with one or three faucet holes


Includes both polished chrome and polished nickel overflow covers


Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)

Arcade 36" single-hole basin, white US-ARC9001TH

Arcade 36" three-hole basin, white US-ARC9003TH

Arcade pedestal base, white US-ARC1



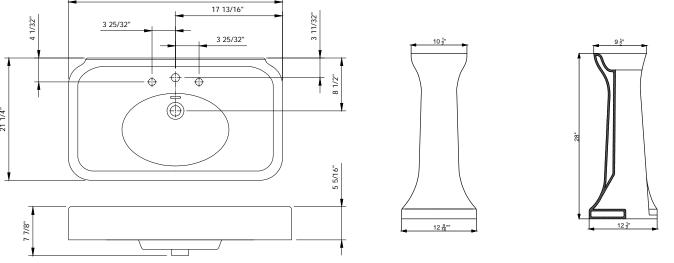



ARCADE 36" BASIN CONSOLE SET

Overall size: W 35-3/4" x D 21-5/8" x H 33"

Material: Fireclay

Set comprised of basin and console legs

Basin is pre-drilled with one or three faucet holes Includes both polished chrome and polished nickel overflow covers

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)

Arcade 36" single-hole basin, white **US-ARC9001TH**

Arcade 36" three-hole basin, white **US-ARC9003TH**

Arcade console legs (pair), white **US-ARC2**



FIXTURES

Basins

ARCADE 36" BASIN CONSOLE SET

Overall size: W 35-3/4" x D 21-5/8" x H 34"

Set comprised of fireclay basin and metal console with safety glass shelf

Basin is pre-drilled with one or three faucet holes Includes both polished chrome and polished nickel overflow covers


Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)


Arcade 36" single-hole basin, white **US-ARC9001TH**

Arcade 36" three-hole basin, white **US-ARC9003TH**

Arcade 36" console base with glass shelf, polished chrome $\ensuremath{\textbf{US-ARC23C}}$

Arcade 36" console base with glass shelf, polished nickel $\ensuremath{\textbf{US-ARC23N}}$

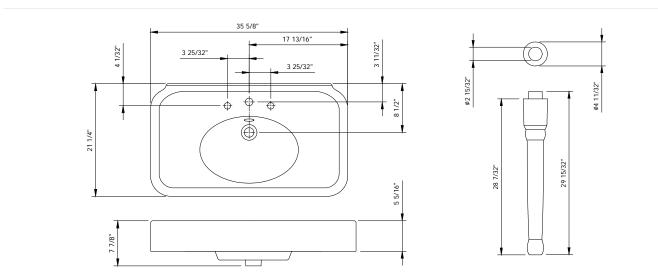

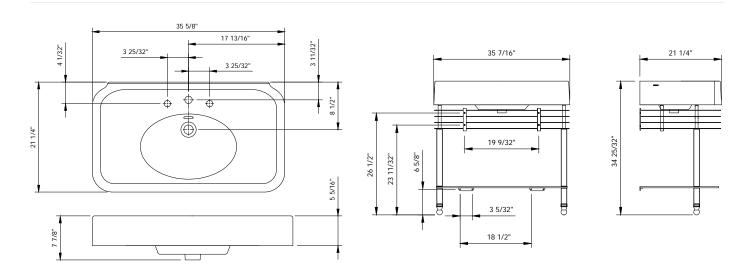



ARCADE 47" DOUBLE BASIN CONSOLE SET

Overall size: W 47-1/2" x D 21-1/2" x H 33"

Material: Fireclay

Set comprised of double basin and console legs

Basins are pre-drilled with one or three faucet holes Includes both polished chrome and polished nickel

overflow covers

Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)

Arcade 47" single-hole double basin, white US-ARC12001TH

Arcade 47" three-hole double basin, white US-ARC12003TH

Arcade console legs (pair), white US-ARC2



Basins

FIXTURES

ARCADE 47" DOUBLE BASIN CONSOLE SET

Overall size: W 47-1/2" x D 21-1/2" x H 34"

Set comprised of fireclay basin and metal console with safety glass shelf

Basins are pre-drilled with one or three faucet holes Includes both polished chrome and polished nickel overflow covers


Basin is suitable for wall-hung installation with or without underside support (mounting hardware for wall-hung installation not supplied)


Arcade 47" single-hole double basin, white US-ARC12001TH


Arcade 47" three-hole double basin, white US-ARC12003TH

Arcade 47" console base with glass shelf, polished chrome US-ARC24C

Arcade 47" console base with glass shelf, polished nickel US-ARC24N

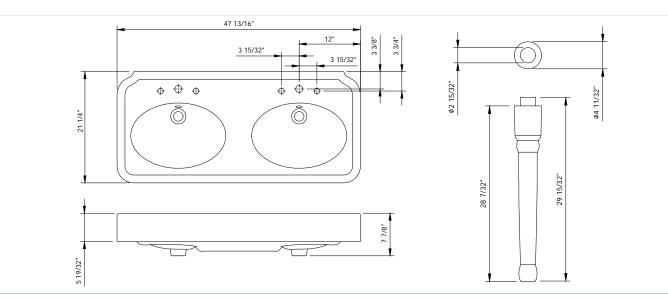

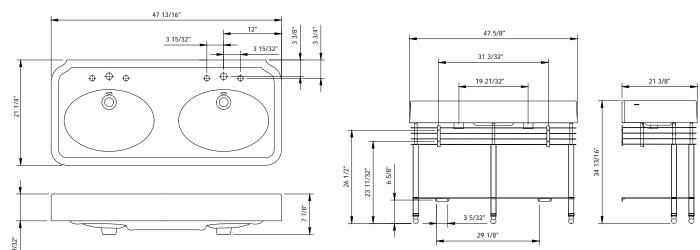

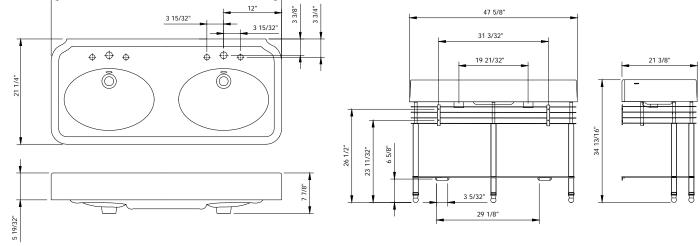





ARCADE BICYCLE BASIN

Size: W 70-5/8" x D 22-3/4" x H 43-1/8"


Includes Pashley bicycle, Arcade 24" basin, Arcade widespread basin faucet in polished chrome with cross handles, walnut shelf, push drain and traditional p-trap

US-BICY1

COMPONENTS

BICY1	Pashley bicycle
US-ARC6003TH	Arcade 24" basin with three-hole drilling and p
US-ARC15C	Arcade widespread basin faucet (cross handle
US-BICSHELFW	Walnut wood shelf
US-BSW0103C	Push drain in polished chrome
US-BTW0225C	Traditional p-trap in polished chrome





l polished chrome overflow cover sles) in polished chrome



MPRO BASINS

Basin sizes:	Material: Fireclay
W 23-5/8" x D 17-3/4" x H 4"	Basin is available ur
W 27-1/2" x D 17-3/4" x H 4"	or three faucet hole
W 39-3/8" x D 17-3/4" x H 4"	
W 47-1/4" x D 17-3/4" x H 4"	



-10		
191		

MPRO 24" Ba	asin
Undrilled	US-PRO
Single-hole	US-PRO
Three-hole	US-PRO

0240 D241 D243

Und Sing Thr



MPRO 39" Basin Undrilled US-PRO390 US-PRO391 Single-hole US-PRO393 Three-hole

Und Sing Thr




1<u>-1/2</u>"ø

1-<u>3/4"ø</u>


28"




















able undrilled, or pre-drilled with one et holes




MPRO 28" Basin

ndrilled	US-PRO280
ngle-hole	US-PRO281
ree-hole	US-PRO283



MPRO 48" Basin

ndrilled	US-PRO480
ngle-hole	US-PRO481
iree-hole	US-PRO483

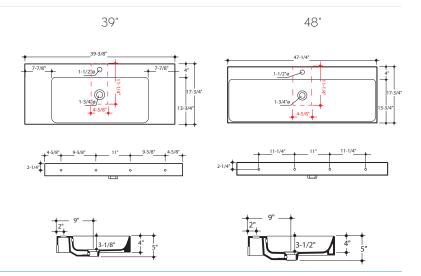





UNDERSTATED LUXURY WITH SPACE FOR ALL THE ESSENTIALS

- Meticulous craftsmanship, elegant design, and generous storage define our modern wall-hung vanities.
- Warm wood or sleek finishes combine with the ultimate in functional details to
 - create style and harmony in the bathroom.



MPRO 24" VANITY

Space-saving design offers clean, streamlined	look
Two drawers provide ample storage	
SlowClose hardware	
Includes mounting brackets	
Basin size: 23-5/8" W x 17-3/4" D x 4" H	
Vanity size: 23-1/4" W x 17-3/8" D x 20-1/2"	-
Basin material: Fireclay	




White Gloss US-PRO24DWG+

American Walnut

US-PRO24DAW+





Vanity material: Medium-density fiberboard (MDF) with lacquer finish (White Gloss and Storm Grey Matte), veneer finish (American Walnut), melamine finish (Driftwood)

Basin is available undrilled, or pre-drilled with one or three faucet holes

Drawer organizers are available (sold separately)



Storm Grey Matte US-PRO24DSG+



Driftwood US-PRO24DDW+





US-PRO240 Undrilled 24" basin

US-PRO241 Single-hole 24" basin

US-PRO243 Three-hole 24" basin

See page 357 for detailed information

DRAWER ORGANIZERS

US-PROORGTANT Top drawer 7 compartments





US-PROORGB1ANT Base drawer 1 compartment




US-PROORGB3ANT Base drawer 3 compartments











MPRO 28" VANITY


Space-saving design offers clean, streamline	d look
Two drawers provide ample storage	
SlowClose hardware	
Includes mounting brackets	
Basin size: 27-1/2" W x 17-3/4" D x 4" H	
Vanity size: 27-1/8" W x 17-3/8" D x 20-1/2"	'Η
Basin material: Fireclay	



White Gloss US-PRO28DWG+



American Walnut US-PRO28DAW+



Vanity material: Medium-density fiberboard (MDF) with lacquer finish (White Gloss and Storm Grey Matte), veneer finish (American Walnut), melamine finish (Driftwood)

Basin is available undrilled, or pre-drilled with one or three faucet holes

Drawer organizers are available (sold separately)



Storm Grey Matte US-PRO28DSG+



Driftwood US-PRO28DDW+





US-PRO280 Undrilled 28" basin

US-PRO281 Single-hole 28" basin

US-PRO283 Three-hole 28" basin

See page 357 for detailed information

DRAWER ORGANIZERS

US-PROORGTANT Top drawer 7 compartments




US-PROORGB1ANT Base drawer 1 compartment



US-PROORGB3ANT Base drawer 3 compartments



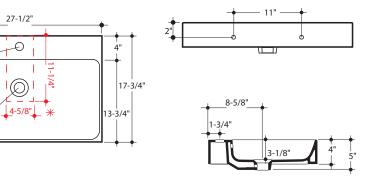



MPRO 39" VANITY


Space-saving design offers clean, streamlined lo	ok
Two drawers provide ample storage	
SlowClose hardware	
Includes mounting brackets	
Basin size: 39-3/8" W x 17-3/4" D x 4" H	
Vanity size: 39" W x 17-3/8" D x 20-1/2" H	
Basin material: Fireclay	



White Gloss US-PRO39DWG+



American Walnut US-PRO39DAW+



Vanity material: Medium-density fiberboard (MDF) with lacquer finish (White Gloss and Storm Grey Matte), veneer finish (American Walnut), melamine finish (Driftwood)

Basin is available undrilled, or pre-drilled with one or three faucet holes

Drawer organizers are available (sold separately)



Storm Grey Matte US-PRO39DSG+



Driftwood US-PRO39DDW+





US-PRO390 Undrilled 39" basin

US-PRO391 Single-hole 39" basin

US-PRO393 Three-hole 39" basin

See page 357 for detailed information

DRAWER ORGANIZERS

US-PROORGTANT Top drawer 7 compartments




US-PROORGB1ANT Base drawer 1 compartment



US-PROORGB3ANT Base drawer 3 compartments



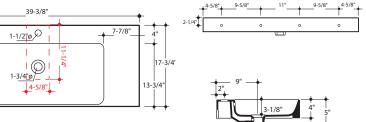



MPRO 48" VANITY

Space-saving design offers clean, streamlined	look
Two drawers provide ample storage	
SlowClose hardware	
Includes mounting brackets	
Basin size: 47-1/4" W x 17-3/4" D x 4" H	
Vanity size: 46-7/8" W x 17-3/8" D x 20-1/2"	Н
Basin material: Fireclay	




White Gloss US-PRO48DWG+



American Walnut US-PRO48DAW+

Driftwood US-PRO48DDW+



Vanity material: Medium-density fiberboard (MDF) with lacquer finish (White Gloss and Storm Grey Matte), veneer finish (American Walnut), melamine finish (Driftwood)

Basin is available undrilled, or pre-drilled with one or three faucet holes

Drawer organizers are available (sold separately)



Storm Grey Matte US-PRO48DSG+







US-PRO480 Undrilled 48" basin

US-PRO481 Single-hole 48" basin

US-PRO483 Three-hole 48" basin

See page 357 for detailed information

DRAWER ORGANIZERS

US-PROORGTANT Top drawer 7 compartments





US-PROORGB1ANT Base drawer 1 compartment



US-PROORGB3ANT Base drawer 3 compartments










DRAWER ORGANIZERS

MPRO DRAWER ORGANIZERS

Drawer organizers for the MPRO vanities Solid beech construction Anthracite color to complement the drawer interior Dovetail joints for durability




Top Drawer 7 compartments Size: 14-7/8" W x 12-1/8" D x 2" H US-PROORGTANT






Base Drawer 3 compartments Size: 12-3/8" W x 11-7/8" D x 4-3/4" H US-PROORGB3ANT






Base Drawer 1 compartment

Size: 12-3/8" W x 7-7/8" D x 4-3/4" H US-PROORGB1ANT





Base Drawer 4 compartments Size: 12-3/8" W x 11-7/8" D x 4-3/4" H US-PROORGB4ANT









TIMELESS DESIGNS TO SUIT ALL BATHROOM STYLES

From streamline designs to traditional styles, choose from a beautiful selection of sanitaryware products to create your ideal bathroom suite. Manufactured using only the finest materials and the latest production techniques, each product will reflect a sense of inspirational individual style.

TOILETS

FIXTURES

MPRO ONE-PIECE SINGLE-FLUSH TOILET

Size: L 28" x W 14 1/2 x H 29 1/2
Universal-height, skirted bowl
Elongated bowl with US-SEATP3 SoftClose, quick release seat
Chrome-plated left-hand side-mount trip lever
Concealed, fully-glazed trapway
Single flushing system
1.28 GPF (4.8 LPF)
MAP flushing performance score: 1,000 grams
9-1/4" x 6-1/4" water surface size
12" rough-in
WaterSense and Green cUPC listed

MPRO one-piece single-flush toilet, white US-PRO9005CW-SF

Crosswater London toilet bowls are coated with Nanoglaze. Nanoglaze is a special treatment that reduces microscopic pores in the ceramic surface making cleaning a much easier process.





MPRO ONE-PIECE DUAL-FLUSH TOILET

Size: L 28" x W 14 1/2 x H 29 1/2
Universal-height, skirted bowl
Elongated bowl with US-SEATP3 SoftClose, quick release seat
Chrome-plated top-mount flush button
Concealed, fully-glazed trapway
Dual flushing system
1.28 GPF (4.8 LPF) / 1.0 GPF (3.8 LPF)
MAP flushing performance score: 800 grams
9-1/4" x 6-1/2" water surface size
12" rough-in
WaterSense and Green cUPC listed

MPRO one-piece dual-flush toilet, white US-PRO9005CW

Crosswater London toilet bowls are coated with Nanoglaze. Nanoglaze is a special treatment that educes microscopic pores in the ceramic surface making cleaning a much easier process.

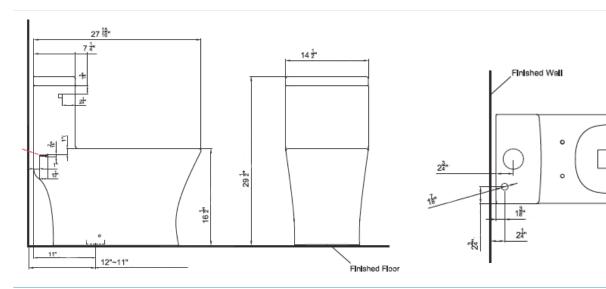

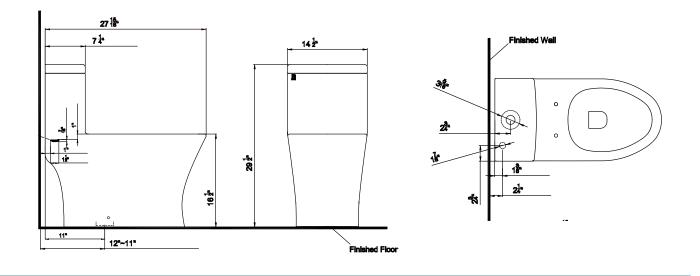




WISP ONE-PIECE DUAL-FLUSH TOILET

Size: L 28 1/8" x W 12 3/4" x H 29 1/2"
Universal-height, skirted bowl
Elongated bowl with US-SEATP3 Soft close, quick release seat
Chrome-plated top-mount flush button
Concealed, fully-glazed trapway
Dual flushing system
1.28 GPF (4.8 LPF) / 1.0 GPF (3.8 LPF)
MAP flushing performance score: 800 grams
9-1/4" x 6-1/2" water surface size
12" rough-in
WaterSense and Green cUPC listed

Wisp one-piece toilet, white US-WP9005CW



Crosswater London toilet bowls are coated with Nanoglaze. Nanoglaze is a special treatment that reduces microscopic pores in the ceramic surface making cleaning a much easier process.





Overall size: L 28 1/8" x W 17 1/8" x H 32 1/8"
Universal-height, elongated, skirted bowl
Chrome-plated left-hand side-mount trip lever
Concealed, fully-glazed trapway
Single flushing system
1.28 GPF (4.8 LPF)
MAP flushing performance score: 800 grams
7" x 5-1/4" water surface size
12" rough-in
WaterSense and Green cUPC listed
Seat sold separately

Belgravia toilet bowl, white US-BL6005CW

Belgravia tank, white US-BL7005CW

Crosswater London toilet bowls are coated with Nanoglaze. Nanoglaze is a special treatment that reduces microscopic pores in the ceramic surface making cleaning a much easier process.

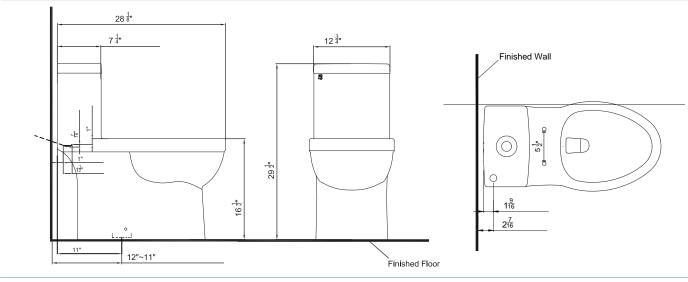

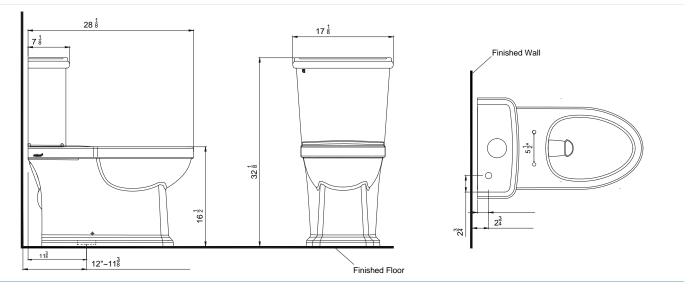



SEAT OPTIONS



SoftClose, quick-release elongated seat **US-SEATU1**

SoftClose, quick-release elongated seat **US-SEATP3**

TRIP LEVER UPGRADES



Polished Chrome
US-ALTANKLEV1C

Polished Nickel
US-ALTANKLEV1N

ARCADE TWO-PIECE TOILET

Overall size: L 28 1/8" x W 19 5/8" x H 32 7/8"Universal-height, elongated, skirted bowlChrome-plated left-hand side-mount trip leverConcealed, fully-glazed trapwaySingle flushing system1.28 GPF (4.8 LPF)MAP flushing performance score: 800 grams7" x 5-1/4" water surface size12" rough-inWaterSense and Green cUPC listedSeat sold separately

Belgravia toilet bowl, white US-BL6005CW

Arcade tank, white US-AL7005CW



SEAT OPTIONS

SoftClose, quick-release elongated seat **US-SEATU1**

SoftClose, quick-release elongated seat US-SEATP3


TRIP LEVER UPGRADES



Polished Chrome
US-ALTANKLEV1C

Polished Nickel **US-ALTANKLEV1N**

Crosswater London toilet bowls are coated with Nanoglaze. Nanoglaze is a special treatment that reduces microscopic pores in the ceramic surface making cleaning a much easier process.

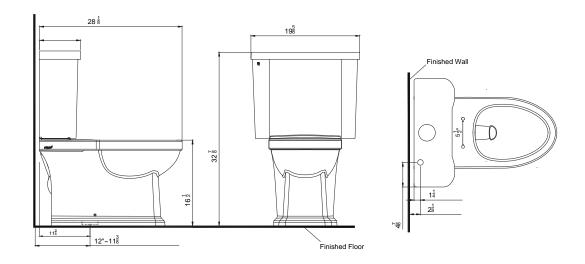



Arcade two-piece toilet (US-AL7005CW, US-BL6005CW) Arcade trip lever in polished chrome (US-ALTANKLEV1C) Arcade freestanding double paper holder in polished chrome (US-ARCA42CHR)

WILD WALL-HUNG TOILET BOWL

Size: L 20 1/2" x W 13 3/8" x H 13 3/4"
Material: Vitreous china
Rimless design
Fully glazed trapway
Complete with fixings
Seat sold separately
Designed to be used with an in-wall carrier (not supplied)

Wild wall-hung toilet bowl, white US-WI6116CW

Wild SoftClose seat, white US-WI6106W





WALDORF WALL-HUNG TOILET BOWL


Size: L 21 5/8" x W 14 1/2" x H 13 1/4"	
Material: Vitreous china	
Fully glazed trapway	
Complete with fixings	
Seat sold separately	
Designed to be used with an in-wall carrier (not supplied)	

Waldorf wall-hung toilet bowl, white US-WF6006CW


Waldorf SoftClose seat, white US-WF6105W













SOFTCLOSE, QUICK RELEASE ELONGATED SEAT


US-SEATU1




SOFTCLOSE, QUICK RELEASE ELONGATED SEAT

US-SEATP3







BATHTUBS



STRIKING AND POLISHED, SET THE STAGE WITH BATHTUBS OF DISTINCTION

At the core of our collection is enduring design and groundbreaking materials. Every Crosswater London bathtub is engineered for long-lasting beauty and exceptional performance. From classic to modern, Crosswater London bathtubs anchor the bathroom in brilliance and style.

DUROCOAT[®] MATERIAL

The main component of DUROCOAT® material is genuine dolomitic marble, a metamorphic rock of natural With its unique technological properties, DUROCOAT® transformation estimated to be over 500 million years old. demonstrates a 35% increase in durability over comparable materials. Fully de-aerated, this resilient material forms a Consisting of 96% calcium magnesium carbonate, a natural uniform core structure from layers of identical density. mineral, the powder is produced by disintegrating and purifying the marble to create this groundbreaking material.

Made from the finest materials. Crosswater London bathtubs BEAUTY are warm to the touch with brilliant white color and high-The unique physical properties of DUROCOAT[®] ensure great gloss sheen. Scratch and stain-resistant with a solid and reliability in manufacturing complex shapes. This is evident in tough surface, every tub is protected by our exclusive sanitary the crisp details of the Waldorf bath, DUROCOAT®'s highgelcoat. Extremely hygenic, easy-to-clean surfaces prevent performance material protects the surface and ensures a the build-up of bacteria and dirt, resulting in a safer bath flawlessly smooth finish for years to come. environment. Relax and enjoy.

CLEARSTONE MATERIAL

ClearStone is a milled sedimentary stone compound with molded polyester polymer coating. The coating is molded onto the bath surface (not painted) thus ensuring long-lasting performance in appearance, color, stability and resistance to scratching or cracking.

BEAUTY

The composition of ClearStone creates a tough and hardwearing compound ideally suited to modern demands for ClearStone allows designers more scope to soften the outlines exceptional performance and endurance. Being a molded and details of a space with bathtubs that feature elegantly coating, ClearStone high-gloss bathtubs have the highest tapering edge details and an overall softer appearance with resistance to accidental damage or thermal degradation.

PEACE OF MIND

Every ClearStone bath is packaged to ensure safe delivery.

- Protective film is applied to the surface of the bath
- Foam is wrapped around the edges
- A plastic bag is wrapped around the bath
- The bath is placed in a unique carrying bag with handles on each side. This bag allows the bath to be easily carried to place, minimizing risk of damage
- · The fully-protected bath is then placed on a thick cardboard surface on a wooden platform

STRENGTH & STYLE

clean, dynamic lines, Each ClearStone tub is hand-polished for over ten hours. ClearStone material has a lustrous finish across modern and classic designs.

STRENGTH & STYLE

The bath is encased in a 1/2"-thick cardboard box with reinforced corners and honeycomb insulation which offers outstanding unidirectional compression resistance during transport





WALDORF BACK-TO-WALL BATHTUB

Size: L 65-3/4" x W 34-1/2" x H 23-5/8" Constructed of DUROCOAT® cast

mineral marble Sits flush against the wall

Ledge provides platform for deck-mount tub filler

Ledge can be drilled for two, three, four or five holes for tub filler (supplied undrilled)

Generous size and center drain

White

Water depth: 14" Displaced capacity: 55 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 352 lbs


Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain . (sold separately)

position comfortably accommodates two bathers

US-WF_BTWBATH



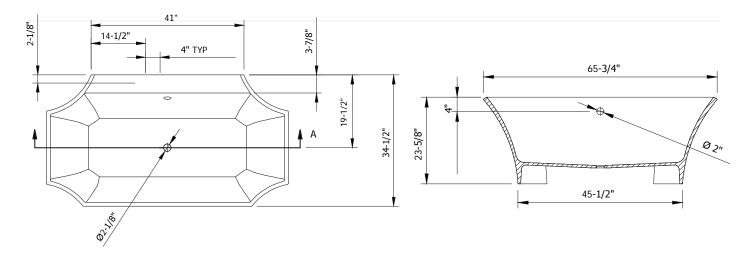

REQUIRED WASTE & OVERFLOW



Clic clac tub waste & overflow assembly

US-BTW0201C Polished Chrome

US-BTW0201N Polished Nickel



Cable drive tub waste & overflow assembly

US-BTW0241C Polished Chrome

US-BTW0241N Polished Nickel

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.




WALDORF FREESTANDING BATHTUB

Size: L 64-3/4" x W 31-3/8" x H 23-5/8"	Weight: 370 lbs
Constructed of DUROCOAT® cast mineral marble	Waste included: p polished nickel
Generous size and center drain position comfortably accommodates two bathers	For installation ove ITD-5135 Island T
Water depth: 14"	Winner of the Rea the Product Desig Hamptons Cottag
Displaced capacity: 60 gallons (displaced capacity is the bath's capacity less 18.49 gallons)	

White with polished chrome waste US-WF_FSBATH-C White with polished nickel waste US-WF_FSBATH-N White without waste US-WF_FSBATH





luded: polished chrome or

ation over a finished floor, please order Island Tub Drain (sold separately) I the Readers' Choice Award in Ict Design category at the 2018 Is Cottages & Gardens IDA Awards

INCLUDED WASTE AND OVERFLOW



US-CW15C Polished Chrome


US-CW15N Polished Nickel

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.







BALTHAZAR BATHTUB WITH POLISHED STAINLESS EXTERIOR


ize: L 66" x W 30" x H 28"
Constructed of ClearStone material which is ngineered to resist stain, retain heat and minimize naintenance
Senerous size and center drain position omfortably accommodates two bathers
Vater depth: 16-1/4"

Required waste For installation ITD5135 Island

Weight: 243.1 lbs

White with polished stainless steel exterior **US-N25CS**





Displaced capacity: 43.2 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-CW11C Polished Chrome

US-CW11N Polished Nickel

US-CW11S Stainless

US-CW11BBC* Brushed Black Chrome


US-CW11BN* Brushed Nickel

US-CW11BB* Brushed Brass *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.

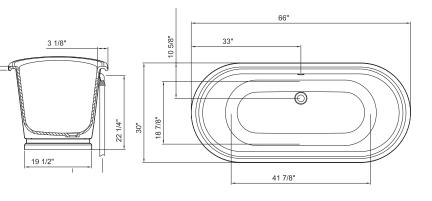



BALTHAZAR BATHTUB WITH POLISHED NICKEL EXTERIOR


Size: L 66" x W 30" x H 28"	
Constructed of DUROCOAT® cast mi	neral marble
Generous size and center drain positic comfortably accommodates two bathe	
Water depth: 16-1/4"	
Displaced capacity: 43.2 gallons (displ	aced

capacity is the bath's capacity less 18.49 gallons)

Weight: 243.1 lbs.

White with polished nickel exterior **US-N25NCS**



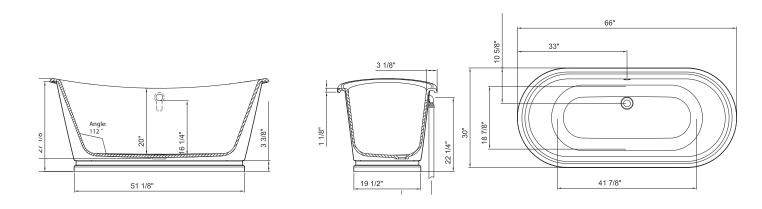

Required waste & overflow sold separately

For installation over a finished floor, please order ITD-5135 Island Tub Drain (sold separately)

REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-CW11C Polished Chrome

US-CW11N Polished Nickel

US-CW11S Stainless

US-CW11BBC* Brushed Black Chrome

US-CW11BN* Brushed Nickel

US-CW11BB* Brushed Brass *6-WEEK LEADTIME

ISLAND TUB **DRAIN ADAPTER**

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.




BALTHAZAR BATHTUB WITH GOLD EXTERIOR

Size: L 66" x W 30" x H 28"
Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance
Generous size and center drain position comfortably accommodates two bathers
Water depth: 16-1/4"

White with gold exterior **US-N25GCS**





Displaced capacity: 43.2 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 243.1 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-CW11C Polished Chrome

US-CW11N Polished Nickel

US-CW11S Stainless

US-CW11BBC* Brushed Black Chrome


US-CW11BN* Brushed Nickel

US-CW11BB* Brushed Brass *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.

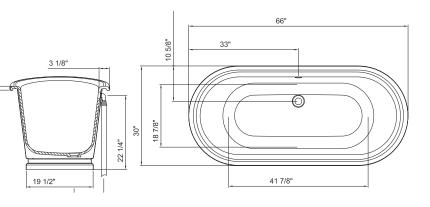




BALTHAZAR BATHTUB WITH WHITE EXTERIOR

Size: L 66" x W 30" x H 28"	Displaced capacity
Constructed of DUROCOAT® cast mineral	capacity is the bath
marble Generous size and center drain position	Weight: 243.1 lbs
	Required waste & d
comfortably accommodates two bathers	For installation ove
Water depth: 16-1/4"	ITD-5135 Island Tu

White with white exterior **US-N25WCS**



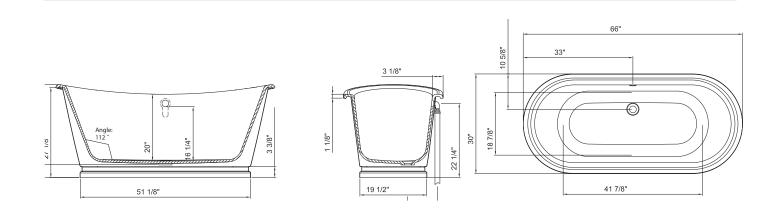

placed capacity: 43.2 gallons (displaced acity is the bath's capacity less 18.49 gallons) act: 2431 lbs

uired waste & overflow sold separately

installation over a finished floor, please order 0-5135 Island Tub Drain (sold separately)





Traditional trim exposed bath waste & overflow

US-CW11C Polished Chrome

US-CW11N Polished Nickel

US-CW11S Stainless

US-CW11BBC* Brushed Black Chrome

US-CW11BN* Brushed Nickel

US-CW11BB* Brushed Brass *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.




BALTHAZAR BATHTUB WITH BLACK EXTERIOR

Size: L 66" x W 30" x H 28" Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers Water depth: 16-1/4"

White with black exterior US-N25BCS





Displaced capacity: 43.2 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 243.1 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)





Traditional trim exposed bath waste & overflow

US-CW11C Polished Chrome

US-CW11N Polished Nickel

US-CW11S Stainless

US-CW11BBC* Brushed Black Chrome


US-CW11BN* Brushed Nickel

US-CW11BB* Brushed Brass *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.

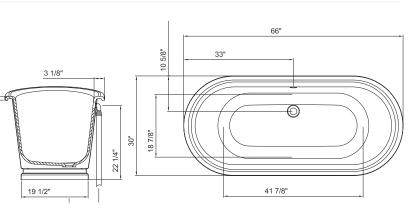



DUO BATHTUB


Size: L 61" x W 37-3/8" x H 19-1/4" Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Center drain position comfortably accommodates two bathers Water depth: 14-7/8"

Weight: 198 lbs Required waste & overflow sold separately For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

White

US-N26CS



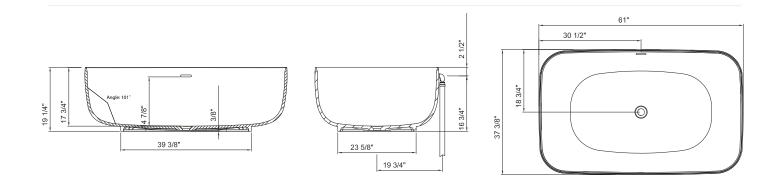

Displaced capacity: 90.22 gallons (displaced capacity is the bath's capacity less 18.49 gallons)



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.




FLORENZA BATHTUB

Size: L 72" x W 34" x H 22-3/8" Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers Water depth: 15" Displaced capacity capacity is the bath Weight: 204.6 lbs Required waste & c For installation over

White

US-N23CS



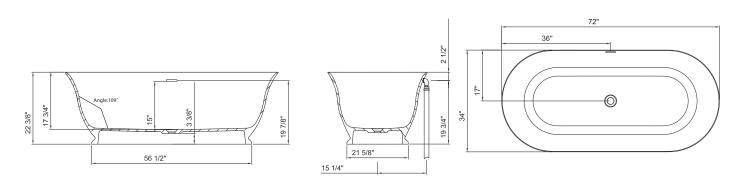

Displaced capacity: 60.77 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 204.6 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



FORMOSO GRANDE BATHTUB

Size: L 66-1/2" x W 31-1/2" x H 22-1/2"


Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position

comfortably accommodates two bathers Water depth: 15" Weight: 184.8 lbs Required waste & overflow sold separately For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

White

US-N2ACS



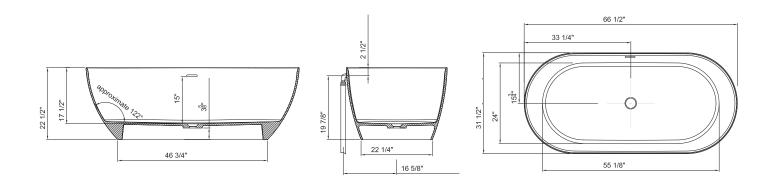

Displaced capacity: 73.18 gallons (displaced capacity s the bath's capacity less 18.49 gallons) Weight: 184.8 lbs



REQUIRED WASTE AND OVERFLOW



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



FORMOSO PETITE BATHTUB


Size: L 59 " x W 31-1/2" x H 22-1/2"

Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Center drain position comfortably accommodates two bathers Water depth: 14-5/8"

White

US-N1ACS



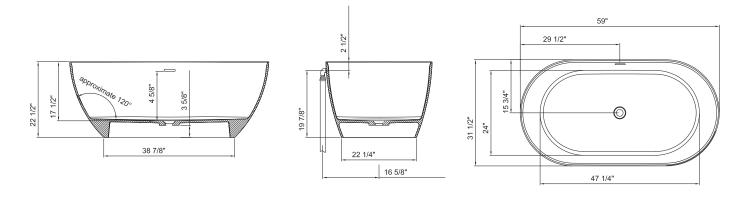

Displaced capacity: 57.46 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 147.4 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

REQUIRED WASTE AND OVERFLOW

Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



NUVOLA BATHTUB

Size: L 66-7/8" x W 29-1/2" x H 20-1/2"


Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance

Generous size and center drain position comfortably accommodates two bathers Water depth: 16" Displaced capacity capacity is the bath Weight: 182.6 lbs Required waste & c For installation ove

White

US-N22CS



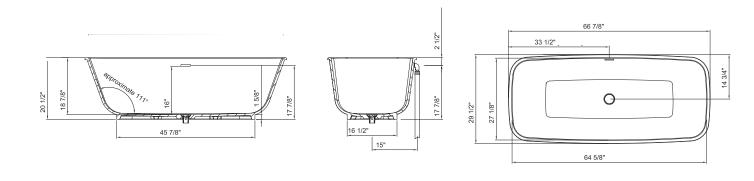

Displaced capacity: 66.05 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 182.6 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.





PALERMO GRANDE BATHTUB

Size: L 70-1/2" x W 29-1/2" x H 22-1/2"


Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers

Water depth: 14-7/8"

White

US-N5CCS



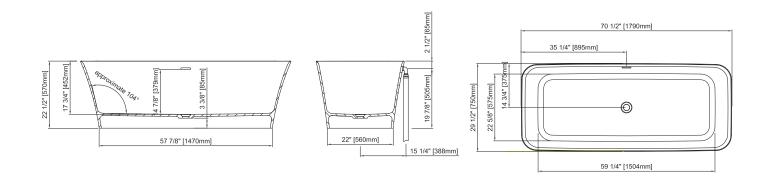

______ ID3133 Isia

Displaced capacity: 68.96 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 217.8 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order TD5135 Island Tub Drain (sold separately)



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.




PALERMO PETITE BATHTUB

Size: L 60" x W 29-1/2" x H 22-1/2"	Displaced capacity capacity is the bat	
Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance		
	Weight: 191.4 lbs	
	Required waste &	
End drain position	For installation ove ITD5135 Island Tu	
Water depth: 14-7/8"		

White

US-N4CCS



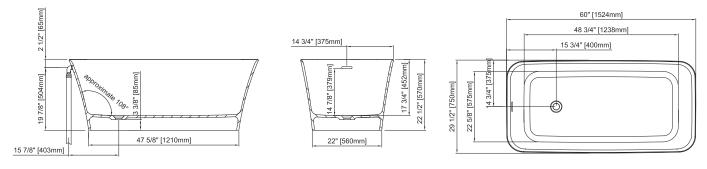

Displaced capacity: 56.14 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



REQUIRED WASTE AND OVERFLOW



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



PATINATO GRANDE BACK-TO-WALL TUB

Size: L 66-1/2" x W 31-1/2" x H 21-5/8" Constructed of ClearStone material which is


engineered to resist stain, retain heat and minimize maintenance Sits flush against the wall Ledge provides platform for deck-mount tub filler Ledge can be drilled for two, three, four or five holes for tub filler (supplied undrilled)

Note: Ledge is not suitable for mounting US-PRO450 or US-WP450

White

US-N3BCS



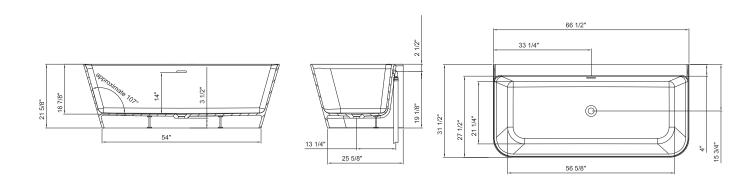

Generous size and center drain position comfortably accommodates two bathers

Displaced capacity: 53.76 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Weight: 200.2 lbs

Water depth: 14"

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

REQUIRED WASTE AND OVERFLOW



Exposed bath waste & overflow

US-BTW0231C Polished Chrome

US-BTW0231N Polished Nickel

US-BTW0231V Stainless

US-BTW0231MB* Matte Black

US-BTW0231BB* Brushed Brass

US-BTW0231BBC* Brushed Black Chrome

US-BTW0231BN* Brushed Nickel

*6-WEEK LEADTIME

ISLAND TUB **DRAIN ADAPTER**

For installation over a finished floor: ITD5135

This item is highly recommended for ease of installation.




PATINATO PETITE BACK-TO-WALL BATHTUB

Size: L 60" x W 31-1/2" x H 21-5/8"	Generous size ar	
Constructed of ClearStone material which is	comfortably acco Water depth: 13- Displaced capaci	
engineered to resist stain, retain heat and minimize		
maintenance		
Sits flush against the wall	capacity is the ba	
Ledge provides platform for deck-mount tub filler	Weight: 187 lbs	
Ledge can be drilled for two, three, four or five	Required waste 8	
holes for tub filler (supplied undrilled)	For installation ov ITD5135 Island T	
Note: Ledge is not suitable for mounting US- PRO450 or US-WP450		

White

US-N3ACS





Generous size and center drain position comfortably accommodates two bathers

Vater depth: 13-7/8"

Displaced capacity: 43.99 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

equired waste & overflow sold separately

or installation over a finished floor, please order [D5135 Island Tub Drain (sold separately)



Exposed bath waste & overflow

US-BTW0231C Polished Chrome

US-BTW0231N Polished Nickel

US-BTW0231V Stainless

US-BTW0231MB* Matte Black

US-BTW0231BB* Brushed Brass

US-BTW0231BBC* Brushed Black Chrome


US-BTW0231BN* Brushed Nickel

*6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: ITD5135

This item is highly recommended for ease of installation.

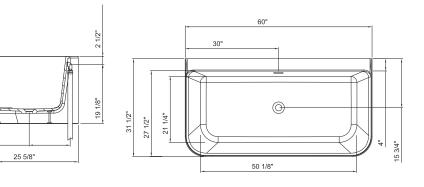



PURO BATHTUB

Size: L 66-7/8" x W 29-1/2" x H 19-1/4" Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers

Weight: 140.08 lbs


White

Water depth: 15"

US-N15CS

STEEL PLINTH (OPTIONAL) Polished Stainless US-N16P



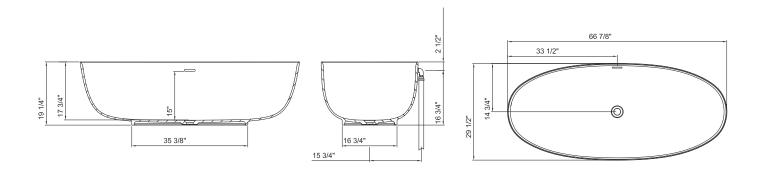

Displaced capacity: 53.5 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)





Steel Plinth

REQUIRED WASTE AND OVERFLOW



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB **DRAIN ADAPTER**

For installation over a finished floor: ITD5135

This item is highly recommended for ease of installation.



White


SONTUOSO BATHTUB

Size: L 66-1/2" x W 27-1/2" x H 23"

Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers Water depth: 15-3/8"

US-N8ECS



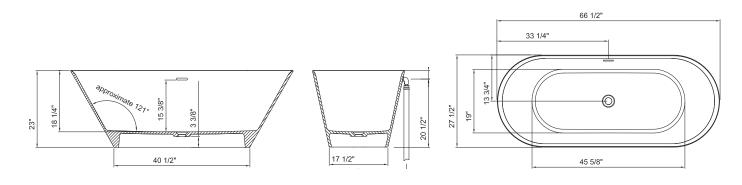

Displaced capacity: 47.16 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

Weight: 155.1 lbs

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.





TEARDROP GRANDE BATHTUB


Size: L 75-1/4" x W 32-1/4" x H 18-7/8"

Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance Generous size and center drain position comfortably accommodates two bathers

Water depth: 14-5/8"

White

US-M11FCS

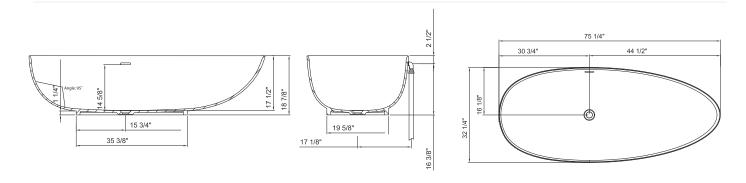

Displaced capacity capacity is the bath Weight: 152.9 lbs Required waste & For installation ove ITD5135 Island Tu

Displaced capacity: 55.75 gallons (displaced capacity is the bath's capacity less 18.49 gallons) Weight: 152.9 lbs

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



REQUIRED WASTE



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



TEARDROP PETITE BATHTUB

Size: L 66-1/2" x W 32-1/4" x H 18-7/8"

Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance


Generous size and center drain position comfortably accommodates two bathers Water depth: 14-5/8"

Weight: 147.4 lbs

White

US-M10FCS



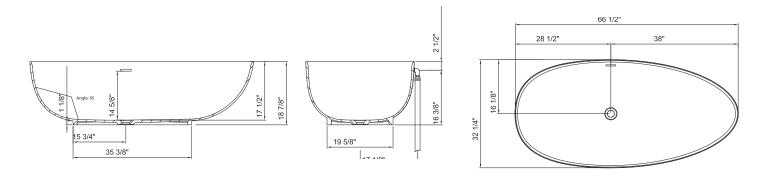

Displaced capacity: 50.07 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)



REQUIRED WASTE AND OVERFLOW

Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB **DRAIN ADAPTER**

For installation over a finished floor: ITD5135

This item is highly recommended for ease of installation.



VICENZA GRANDE BATHTUB

Size: L 70-7/8" x W 31-1/2" x H 22-1/2"

Constructed of ClearStone material which is engineered to resist stain, retain heat and minimize maintenance

Generous size and center drain position comfortably accommodates two bathers Water depth: 15"


Weight: 235.4 lbs

For installation over a finished floor, please order ITD5135 Island Tub Drain (sold separately)

White

US-N7DCS



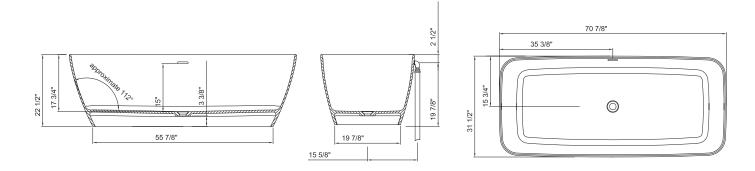

Displaced capacity: 77.81 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately



Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB **DRAIN ADAPTER**

For installation over a finished floor: ITD5135

This item is highly recommended for ease of installation.






VICENZA PETITE BATHTUB

Size: L 60" x W 31-1/2" x H 22-1/2"	Disp
Constructed of ClearStone material which is	сара
engineered to resist stain, retain heat and minimiz	e Weig
maintenance	Requ
End drain position	For in
Water depth: 14-7/8"	ITD5

White

US-N6DCS



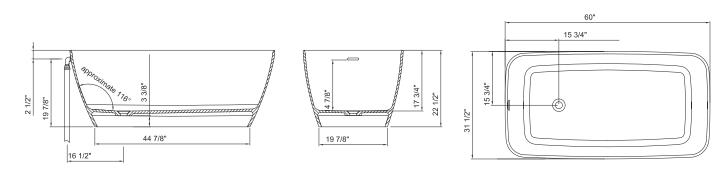

splaced capacity: 62.75 gallons (displaced pacity is the bath's capacity less 18.49 gallons) eight: 203.5 lbs

quired waste & overflow sold separately

r installation over a finished floor, please order D5135 Island Tub Drain (sold separately)

REQUIRED WASTE AND OVERFLOW

Exposed bath waste & overflow (both elliptical and rectangular overflow plates included)

9

US-CW12C Polished Chrome

US-CW12N Polished Nickel

US-CW12S Stainless

US-CW12MB* Matte Black

US-CW12BB* Brushed Brass

US-CW12BBC* Brushed Black Chrome

US-CW12BN* Brushed Nickel *6-WEEK LEADTIME

ISLAND TUB DRAIN ADAPTER

For installation over a finished floor: **ITD5135**

This item is highly recommended for ease of installation.



CLASSICO GRANDE CLAWFOOT BATHTUB


Size: L 66-1/2" x W 31-1/2" x H 26-1/8"	Displaced capacity capacity is the bath Weight: 151.8 lbs Not suitable for rin
Constructed of ClearStone material which is	
engineered to resist stain, retain heat and minimize	
maintenance	
Center drain position comfortably accommodates two bathers	Required claw feet
	Required waste & a
Water depth: 15-1/2"	

Not suitable for rim mounting faucet equired claw feet sold separately equired waste & overflow sold separately

White

US-N9CS



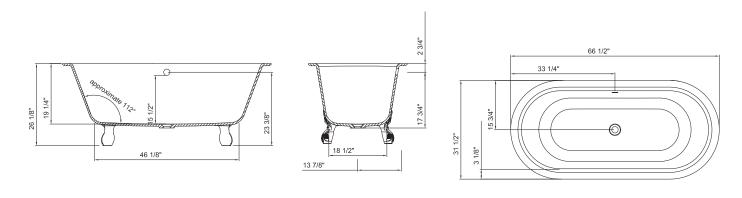

Displaced capacity: 45.65 gallons (displaced capacity is the bath's capacity less 18.49 gallons)





US-L1C Polished Chrome

US-L1N Polished Nickel

US-L1W White

REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-BTW0222C Polished Chrome

US-BTW0222N Polished Nickel




BATELLO GRANDE DOUBLE SLIPPER CLAWFOOT BATHTUB

Size: L 66-1/2" x W 31-1/2" x H 27-1/8"	Displ
Constructed of ClearStone material which is	capa
engineered to resist stain, retain heat and minimize	Weig
maintenance	Not s
Center drain position comfortably accommodates two bathers	Requ
Water depth: 14-5/8"	Requ



US-N10CS





placed capacity: 39.89 gallons (displaced pacity is the bath's capacity less 18.49 gallons) ght: 145.64 lbs

suitable for rim mounting faucet

uired claw feet sold separately

uired waste & overflow sold separately

FEET OPTIONS



US-L1C Polished Chrome

US-L1N Polished Nickel

US-L1W White

REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-BTW0222C Polished Chrome

US-BTW0222N Polished Nickel




ROMANO GRANDE SLIPPER CLAWFOOT BATHTUB

Size: L 66-1/2" x W 29-1/2" x H 31-5/8"	Displaced cap
Constructed of ClearStone material which is	capacity is the
engineered to resist stain, retain heat and minimize maintenance	Weight: 164.3
	Not suitable fo
End drain position	Required claw
Water depth: 15-1/2"	Required wast

White

US-N11BCS



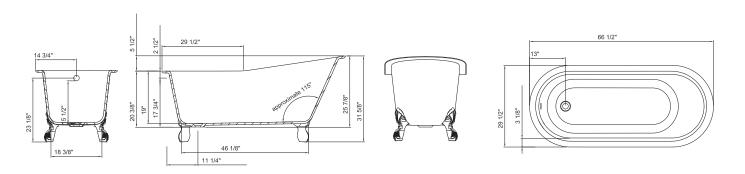

- apacity: 44.12 gallons (displaced ne bath's capacity less 18.49 gallons) 34 lbs
- for rim mounting faucet
- w feet sold separately
- Required waste & overflow sold separately





US-L1C Polished Chrome

US-L1N Polished Nickel

US-L1W White

REQUIRED WASTE AND OVERFLOW



Traditional trim exposed bath waste & overflow

US-BTW0222C Polished Chrome

US-BTW0222N Polished Nickel



ROMANO PETITE SLIPPER CLAWFOOT BATHTUB


Size: L 60" x W 31" x H 31-5/8"
Constructed of ClearStone material which is engineered to resist stain, retain heat and minimi maintenance
Center drain position comfortably accommodate two bathers
Water depth: 15-1/2"

Weight: 145.64 lbs Not suitable for rim mounting faucet Required claw feet sold separately

White

US-N11ACS



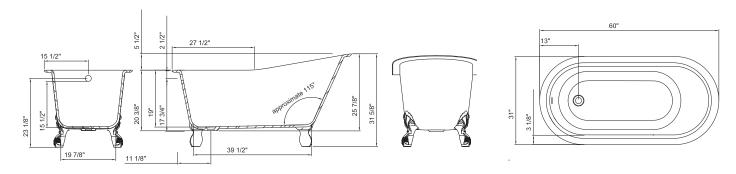

Displaced capacity: 33.95 gallons (displaced capacity is the bath's capacity less 18.49 gallons)

Required waste & overflow sold separately

FEET OPTIONS



US-L1C Polished Chrome

US-L1N Polished Nickel

US-L1W White


REQUIRED WASTE AND OVERFLOW




Traditional trim exposed bath waste & overflow

US-BTW0222C Polished Chrome

US-BTW0222N Polished Nickel

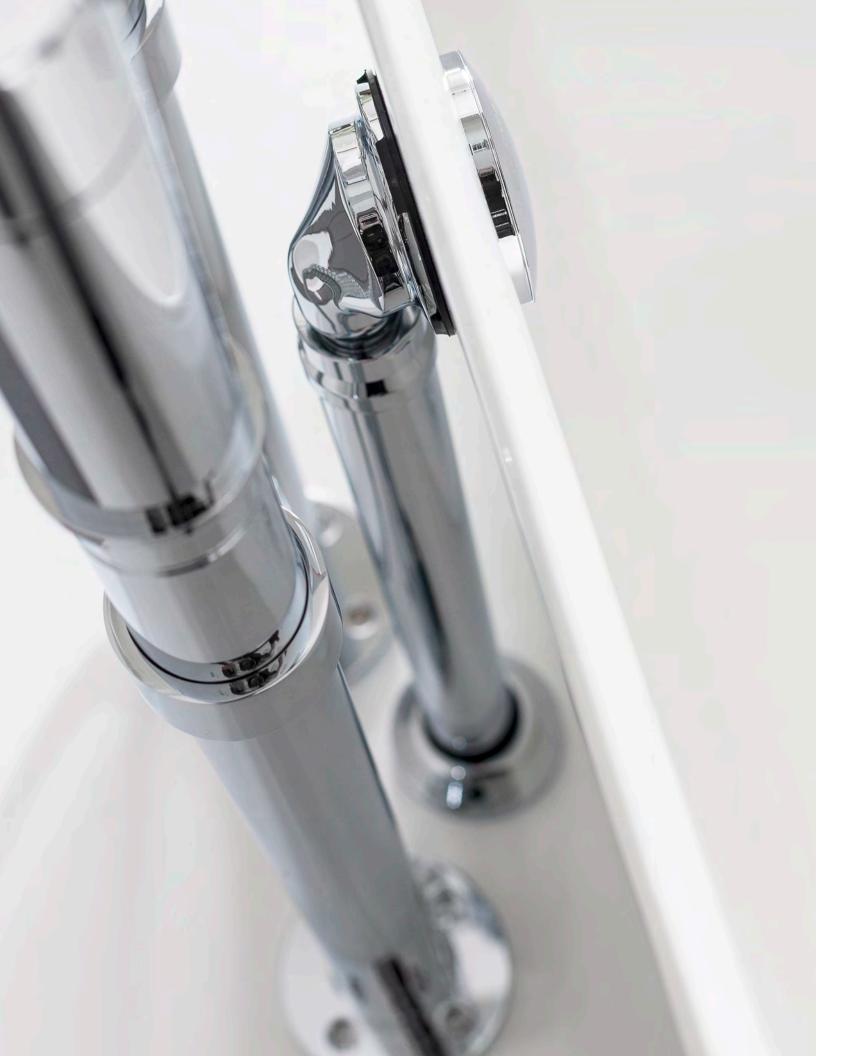



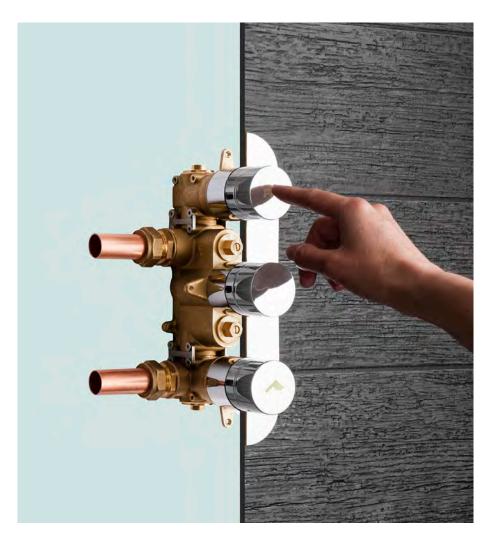

WASTES, TRAPS AND ROUGHS


QUALITY PERFORMANCE COMES FROM WITHIN

QUALITY COMES FROM WITHIN



Endurance, quality, economy and safety lay at the core of every Crosswater London thermostatic shower valve.





PRECISION TECHNOLOGY

THE PERFORMANCE 'HEART' OF THE VALVE

'Vernet CA43' is the world's leading thermostatic cartridge due to its advanced technology in smooth and precise temperature control.

The thermostatic mixers (single or multiple outlet), will maintain their pre-set water temperature, so whether you switch from one water outlet to another or turn off the water to shampoo your hair, the thermostat will automatically find the exact pre-set temperature when you recommence your shower, allowing you to relax and enjoy the ultimate showering experience.







RELIABILITY

LIMITED LIFETIME WARRANTY

The key element of the valve technology is the ingenious 'thermo-brain' feature. The high-quality materials used for this thermo-brain greatly minimize potential of lime scale settling on working parts, which extends the lifetime and performance of the valve. The lifespan is a minimum 50,000 cycles, which equates to a family of four showering twice per day for up to 17 years! (dependent upon water quality and delivery conditions).

By installing a Crosswater London thermostatic shower valve you can start to save water and energy from the first day of use. Thanks to the superior shower technology and operation efficiency, a Crosswater London thermostatic shower valve will pay for itself over a short period of time.



P & O ur frc th cc th le th le th th er th se

DURABILITY

QUALITY CERAMIC DISC CARTRIDGE

The basis for all high-quality shower valves is the performance of the internal turning parts - even after it has been used thousands of times. All Crosswater London thermostatic shower valves use Flühs ceramic disc technology inside the Vernet cartridges - the leading innovator, producer and supplier in the world of water supply products. Each valve is marked with a Flühs symbol as a sign of quality and compliance.

Silky smooth operation and precise water control are characteristic of Flühs products. All raw materials are highly resistant to acidic and alkaline solutions in the bathroom (soap, shampoo, etc). The ceramic discs themselves provide the very best operation and are highly reliable, even when you have wet and soapy hands. The strength of the ceramic discs is extremely durable to prevent the usual wear and tear, even after years of prolonged use.

SAFETY

PRECISION IN TEMPERATURE & WATER FLOW CONTROL

Once you have selected your preferred water temperature it will remain unchanged for the duration of your shower, so there's no risk of scalding from a sudden temperature increase and no surprising shocks should the temperature plummet. The Vernet cartridge has precise temperature control and automatic shutdown should a cold water failure occur, and the anti-scald function is individually checked on each cartridge prior to leaving the factory to give you peace of mind.

The Vernet CA43 cartridge provides the best temperature regulation and safety measures possible. The thermostatic mixer valve blends the hot and cold water together and reacts instantly to any changes in the water pressure. For example, when a toilet is flushed, the cartridge ensures that the temperature is maintained within 1°C below/above the set temperature.

BASIN PUSH DRAIN WITH OVERFLOW CLIC CLAC BATH WASTE & OVERFLOW Unlacquered Brass US-BSW906B Polished Chrome US-BTW0201C Brushed Nickel US-BSW906BN Polished Nickel US-BTW0201N Brushed Black Chrome US-BSW906BBC Stainless US-BTW0201V 1-1/8" **BASIN PUSH DRAIN WITH OVERFLOW** Polished Chrome US-BSW0103C Polished Nickel US-BSW0103N G 1 1/4" Stainless US-BSW0103V Matte Black US-BSW0103MB Brushed Brass US-BSW0103BB CABLE DRIVE BATH WASTE & OVERFLOW -¢1 1/4" Polished Chrome US-BTW0241C BASIN PUSH DRAIN WITHOUT OVERFLOW Polished Nickel US-BTW0241N Stainless US-BTW0241V Polished Chrome US-BSW0101C Polished Nickel US-BSW0101N Stainless US-BSW0101V ¢1 1/4"


CONTEMPORARY BOTTLE TRAP

Polished Chrome	US-BTR0402C
Polished Nickel	US-BTR0402N
Stainless	US-BTR0402V
Matte Black	US-BTR0402MB*
Brushed Brass	US-BTR0402BB*
Brushed Black Chrome	e US-BTR0402BBC*
Brushed Nickel	US-BTR0402BN*

TRADITIONAL P-TRAP

Polished Chrome	US-BTW0225C
Polished Nickel	US-BTW0225N
Stainless	US-BTW0225V
Matte Black	US-BTW0225MB*
Brushed Brass	US-BTW0225BB*
Brushed Black Chrome	US-BTW0225BBC*
Brushed Nickel	US-BTW0225BN*

*6-WEEK LEADTIME

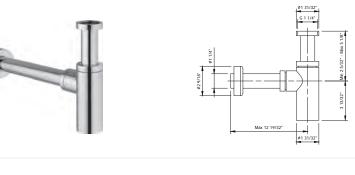

MAX 11" G 1"1/4

EXPOSED BATH WASTE & OVERFLOW

Polished Chrome	US-BTW0222C
Polished Nickel	US-BTW0222N
Stainless	US-BTW0222V





Bath wastes & overflows

¢1 1/2"

¢1 1/2*

EXPOSED BATH WASTE AND OVERFLOW

EXPOSED BATH WASTE AND OVERFLOW

(both elliptical and rectangular overflow plates included)

US-CW12N US-CW12S

US-CW12MB*

US-CW12BB*

EXPOSED BATH WASTE AND OVERFLOW (both elliptical and rectangular overflow plates included)

US-CW14N

US-CW14S US-CW14MB*

US-CW14BB*

Polished Chrome US-CW12C

Brushed Black Chrome US-CW12BBC*

Brushed Nickel US-CW12BN*

Polished Chrome US-CW14C

Brushed Black Chrome US-CW14BBC* Brushed Nickel US-CW14BN*

Polished Nickel

Stainless

Matte Black

Brushed Brass

Polished Nickel

Brushed Brass

Stainless Matte Black

Polished Chrome	US-CW11C
Polished Nickel	US-CW11N
Stainless	US-CW11S
Matte Black	US-CW11MB*
Brushed Brass	US-CW11BB*
Brushed Black Chrome	US-CW11BBC*
Brushed Nickel	US-CW11BN*



EXPOSED BATH WASTE & OVERFLOW

For use with Patinato Grande and Patinato Petite bathtubs

Polished Chrome	US-BTW0231C
Polished Nickel	US-BTW0231N
Stainless	US-BTW0231V
Matte Black	US-BTW0231MB*
Brushed Brass	US-BTW0231BB*
Brushed Black Chrome	US-BTW0231BBC
Brushed Nickel	US-BTW0231BN*

EXPOSED BATH WASTE

Polished Chrome US-CW15C Polished Nickel US-CW15N

ISLAND TUB DRAIN

Allows for freestanding tub to be installed over finished floor (before tile installation). This item is highly recommended for ease of installation.


ITD5135






*6-WEEK LEADTIME



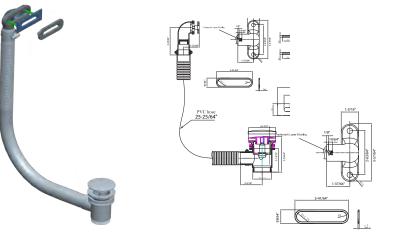





Faucets

ROUGH FOR FLOOR-MOUNT SINGLE-HOLE TUB FILLER

Minimum depth into the floor: 2-1/8"
Maximum depth into the floor: 3-1/2"
Water pressure maximum: 60 PSI
Water pressure minimum: 20 PSI

US-418ROUGH



ROUGH FOR FLOORSTANDING PILLAR LEGS

Easy-install floor rough	
Minimum depth into the floor: 1-3/4"	
Maximum depth into the floor: 2-3/4"	
Water pressure maximum: 60 PSI	
Water pressure minimum: 20 PSI	



US-AA002ROUGH

ROUGH FOR UNION FLOOR-MOUNT TUB FILLER

Minimum depth into the floor: 1-3/4"
Maximum depth into the floor: 2-3/4"
Water pressure minimum: 20 PSI
Water pressure maximum: 60 PSI

US-399ROUGH





Flühs quarter-turn ceramic disc cartridges	

ROUGH FOR WALL-MOUNT THREE-HOLE BASIN FAUCET

Flow rate: 1.2 GPM at 30 PSI	
Extension kit: US-130ROUGH-EXT	

US-130ROUGH US-130ROUGH-EXT




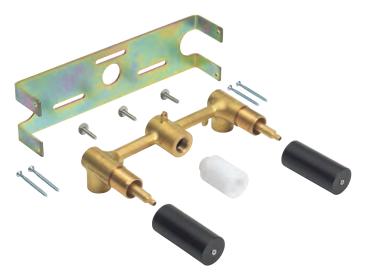


ROUGH FOR WALL-MOUNT SINGLE-LEVER BASIN FAUCET

Right-hand mixer handle (handle orientation cannot be changed)
Kerox ceramic disc cartridge
Flow rate: 1.2 GPM at 80 PSI


Polished ChromeUS-120ROUGH-CPolished NickelUS-120ROUGH-NStainlessUS-120ROUGH-VMatte BlackUS-120ROUGH-MBBrushed BrassUS-120ROUGH-BB










444

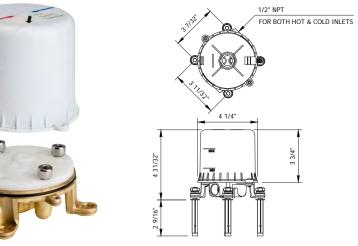

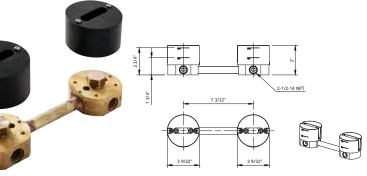

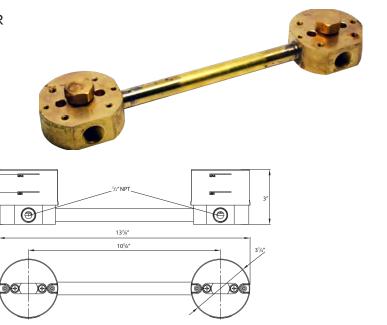

1000 3/4" THERMOSTATIC ROUGH WITH SINGLE INTEGRATED VOLUME CONTROL

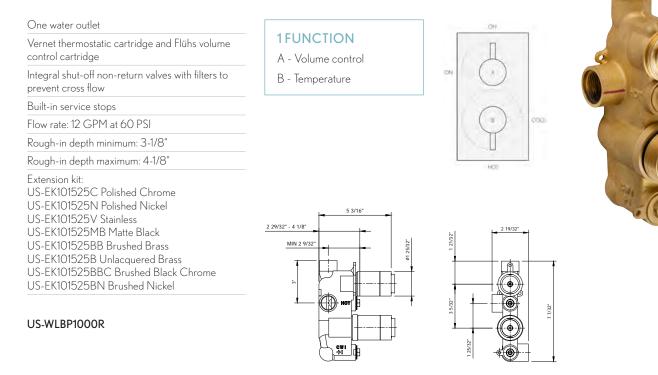

1500 3/4" THERMOSTATIC ROUGH WITH VOLUME CONTROL/DIVERTER

2 29/32" - 4 1/8

2 9/32

Two independent water outlets
Vernet thermostatic cartridge
Integral shut-off non-return valves with filters to prevent cross flow
Built-in service stops
Flow rate: 11 GPM at 60 PSI


Rough-in depth minimum: 3-1/8"

Rough-in depth maximum: 4-1/8"


Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525V Stainless US-EK101525MB Matte Black US-EK101525BB Brushed Brass US-EK101525B Unlacquered Brass


US-EK101525BBC Brushed Black Chrome US-EK101525BN Brushed Nickel

US-WLBP1500R







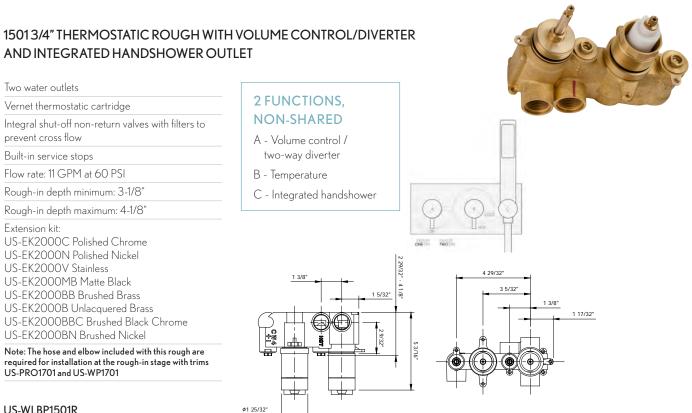

Two water outlets	
Vernet thermostatic cartridge	2 F
Integral shut-off non-return valves with filters to prevent cross flow	NC
Built-in service stops	tw
Flow rate: 11 GPM at 60 PSI	B - ⁻
Rough-in depth minimum: 3-1/8"	C -
Rough-in depth maximum: 4-1/8"	
Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel US-EK2000V Stainless US-EK2000MB Matte Black US-EK2000BB Brushed Brass US-EK2000B Unlacquered Brass US-EK2000BBC Brushed Black Chrome US-EK2000BN Brushed Nickel	
Note: The hose and elbow included with this rough are	


US-WLBP1501R

2000 3/4" THERMOSTATIC ROUGH WITH TWO INTEGRATED VOLUME CONTROLS

Two water outlets	
Vernet thermostatic cartridge and Flühs volun control cartridges	ıe
Integral shut-off non-return valves with filters t prevent cross flow	0
Built-in service stops	
Flow rate: 13 GPM at 60 PSI	
Rough-in depth minimum: 3-1/8"	

Rough-in depth maximum: 4-1/8"

Extension kit: US-EK2000C Polished Chrome US-EK2000N Polished Nickel US-EK2000V Stainless US-EK2000MB Matte Black US-EK2000BB Brushed Brass US-EK2000B Unlacquered Brass US-EK2000BBC Brushed Black Chrome US-EK2000BN Brushed Nickel




US-WLBP2000R


2 FUNCTIONS, SHARED

- A Volume control
 - B Temperature
 - C Volume control












2500 3/4" THERMOSTATIC ROUGH WITH INTEGRATED VOLUME CONTROL/THREE-WAY DIVERTER

Three water outlets		500 1	
Vernet thermostatic cartridge	3 FUNCTIONS,	OUTLET ONE ON TWO ON	
Integral shut-off non-return valves with filters to prevent cross flow	NON-SHARED A - Volume control/	OUTLET	
Built-in service stops	three-way diverter	THREE ON	
Flow rate: 12 GPM at 60 PSI	B - Temperature	(a) COLD	
Rough-in depth minimum: 3-1/8"			
Rough-in depth maximum: 4-1/8"			-6
Extension kit: US-EK101525C Polished Chrome US-EK101525N Polished Nickel US-EK101525V Stainless US-EK101525MB Matte Black US-EK101525BB Brushed Brass US-EK101525B Unlacquered Brass US-EK101525BNC Brushed Black Chrome US-EK101525BN Brushed Nickel	npt idu.y/r idu.y/r idu.y/r	HOD 2'/a" Finished Wall HOT K K K K K K K K K K K K K	

3000 THERMOSTATIC ROUGH WITH INTEGRATED VOLUME CONTROL AND VOLUME CONTROL/TWO-WAY DIVERTER

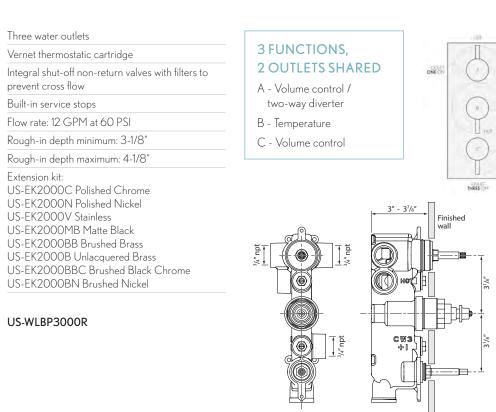




DIAL 1000 3/4" THERMOSTATIC ROUGH WITH SINGLE INTEGRATED VOLUME CONTROL

One water outlet	
Volume control features technology	; push-button on/off
Vernet thermostatic car control cartridge	tridge and Flühs volume
Integral shut-off non-ret prevent cross flow	urn valves with filters to
Built-in service stops	
Flow rate: 12 GPM at 60	O PSI
Rough-in depth minimu	m: 3-1/8"
Rough-in depth maximu	um: 4-1/8"


US-DL1000RC



DIAL 2000 3/4" THERMOSTATIC ROUGH WITH TWO INTEGRATED VOLUME CONTROLS

Volume controls feature push-button o technology	on/off
Vernet thermostatic cartridge and Flül control cartridge	hs volume
Integral shut-off non-return valves with prevent cross flow	n filters to
Built-in service stops	
Flow rate: 13 GPM at 60 PSI	
Rough-in depth minimum: 3-1/8"	
Rough-in depth maximum: 4-1/8"	

US-DL2000RC

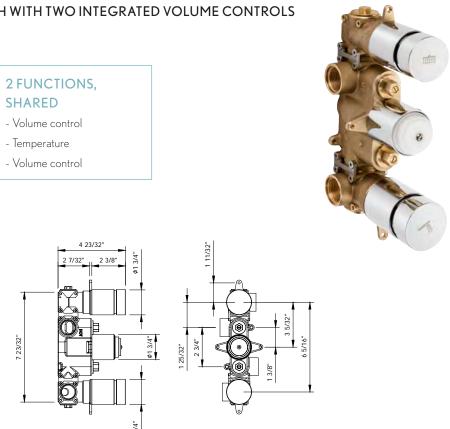

448

1FUNCTION

- Volume control

- Temperature



DIAL 2001 3/4" THERMOSTATIC ROUGH WITH TWO INTEGRATED VOLUME CONTROLS

Two water outlets

For horizontal installation	
Volume controls feature push-button on/of technology	f
Vernet thermostatic cartridge and Flühs vo control cartridge	lume
Integral shut-off non-return valves with filte prevent cross flow	rs to
Built-in service stops	
Flow rate: 13 GPM at 60 PSI	

Rough-in depth minimum: 3-1/8"

Rough-in depth maximum: 4-1/8"


Note: The hose and elbow included with this rough are required for installation at the rough-in stage with trim US-DIAL-CENT-12C

US-DL2001RC

2 FUNCTIONS. SHARED - Volume control

- Temperature - Volume control



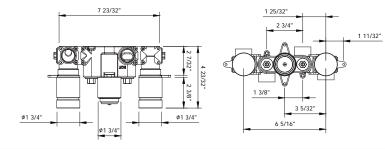

3/4"-14NPT

3/4" THERMOSTATIC VALVE ROUGH

Temperature control only; volume control/diverters sold separately		i.
Vernet thermostatic cartridge	CONTROL ONLY	
Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or thermal shock		1
Integral shut-off non-return valves with filters to prevent cross flow	The second se	r
Flow rate: 10-12 GPM at 45 PSI		
Rough-in depth minimum: 2-1/2"		
Rough-in depth maximum: 3-1/4"		
Extension kit: 9Q1172CP-PC	2 1/2-3 5/16	
9Q1172RN-PN 9Q1172AP-SN	4 7/8	
9Q1172FO-BZ	3 1/8	3
TH-RGH	5" - 5 5/8	1

One water outlet

Vernet thermostatic cartridge Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or thermal shock Integral shut-off return valve with filters to prevent cross flow

Flow rate: 10-12 GPM at 45 PSI Rough-in depth minimum: 2-3/4"

Rough-in depth maximum: 3-1/4"

Extension kit: 9Q242000CP

9Q242000RN

9Q242000AP 9Q242000FO

TH1-RGH

4. 5/163

DUAL-CONTROL 3/4" THERMOSTATIC VALVE WITH VOLUME CONTROL AND DIVERTER ROUGH

Two water outlets

Vernet thermostatic cartridge

Cartridge restricts water supply should the hot or cold supply fail, to prevent scalding or

thermal shock Integral shut-off return valve with filters to prevent cross flow

Flow rate: 10-12 GPM at 45 PSI


Rough-in depth minimum: 2-1/2"

Rough-in depth maximum: 3-1/4"

Extension kit: 9Q242000CP 9Q242000RN


9Q242000AP 9Q242000FO

TH2-RGH

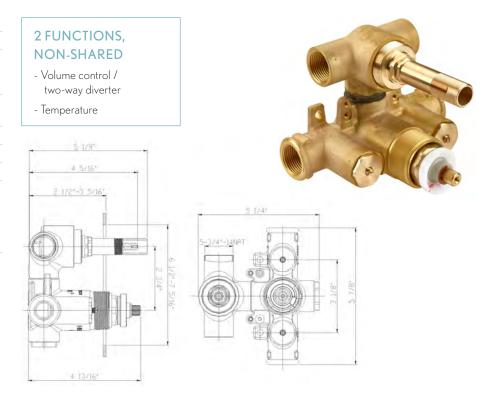



DUAL-CONTROL 3/4" THERMOSTATIC VALVE WITH VOLUME CONTROL ROUGH

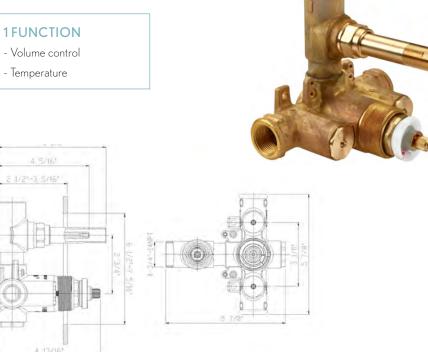

3/4" VOLUME CONTROL ROUGH

VOLUME

1 1 1/4" Ť.

CONTROL ONLY

3/8"-1 1/2"

3/4"-14 NPT

-

1 7/8"-2 5/8"

5 3/16"

1 3/32"-1 7/8"

2 FUNCTION

DIVERTER

1.3/

3/4"-14 NPT

3 3/4"

Volume control controls on/off and volume functions for a single component in a shower system Flühs quarter-turn ceramic disc cartridge Rough-in depth minimum: 1-7/8" Rough-in depth maximum: 2-5/8" Extension kit:

5T1C0319NT + 5P0C0582NT


VC-RGH



1/2" THREE-WAY DIVERTER ROUGH

Diverter alternates water flow between three water outlets	
Kerox diverter cartridge	
Rough-in depth minimum: 2-1/8"	
Rough-in depth maximum: 2-7/8"	
Extension kit: 5T1C0319NT + 5P0C0582NT	

3DV-RGH

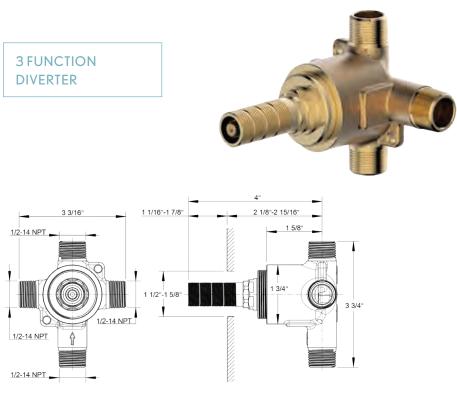


1FUNCTION

3/4" TWO-WAY DIVERTER ROUGH

Diverter alternates water flow between two water outlets
Kerox diverter cartridge
Rough-in depth minimum: 1-7/8"
Rough-in depth maximum: 2-5/8"
Extension kit: 5T1C0319NT + 5P0C0582NT

DIV-RGH






PRESSURE-BALANCE VALVE ROUGH

Kero	pressure-balance cartridge
temp	ure-balance cartridge maintains constant erature in response to changes to hot and supply
Flow	rate: 3-5 GPM at 45 PSI
Roug	h-in depth minimum: 2-1/8"
Roug	h-in depth maximum: 3"
Extor	sion kit:

Extension kit: 5T1C0319NT + 5P0C0582NT

PBS-RGH

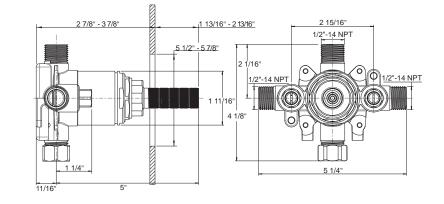



PRESSURE-BALANCE VALVE WITH DIVERTER ROUGH

Diverter alternates water flow between two outlets - tub spout/shower head, tub spout/handshower, shower head/handshower Kerox pressure-balance cartridge

Pressure-balance cartridge maintains constant temperature in response to changes to hot and cold supply

Flow rate: 3-5 GPM at 45 PSI

Rough-in depth minimum: 2-7/8"

Rough-in depth maximum: 3-7/8"

Extension kit: 5T1C0319NT + 5P0C0582NT

PBTS-RGH

2 FUNCTIONS, NON-SHARED - Two-way diverter

- Temperature



2 7/8" - 3 7/8" 1 13/16" - 2 13/16" 2 15/16" 2 1/16" 1/2"-14 NPT A) 5 1/2" - 5 7/8" R 2 3/16" 1/2"-14 NPT 1/2"-14 NPT 5 11/16" 1 15/1 1/2"-14 NPT 5 1/4"

DECK-MOUNT TUB FAUCET ROUGH

Rough valve for deck tub sets 11-02-T and 14-02-T
Flühs volume control cartridges
Inlet connection: 3/4" NPT
Deck thickness maximum: 2-1/8"
Handle spread maximum: 19"


DT-R-RGH




DECK-MOUNT TUB FAUCET WITH HANDSHOWER ROUGH

Rough valve for deck tub sets with handshower 11-03-T and 14-03-T	
Flühs volume control cartridges	
Inlet connection: 3/4" NPT	
Deck thickness maximum: 2-1/8"	
Handle spread maximum: 19"	

DTHS-R-RGH

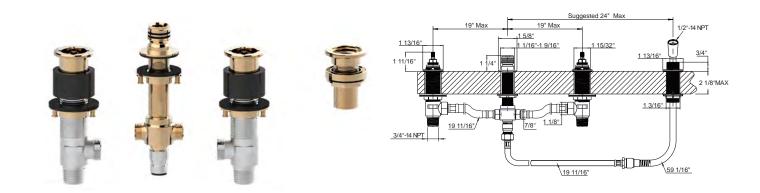

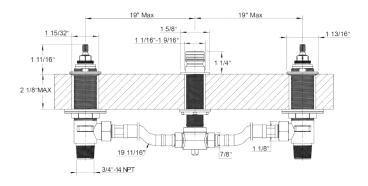


Tub faucets

DECK-MOUNT TUB FAUCET ROUGH

Rough valve for deck tub set 17-02-T	
Flühs volume control cartridges	
Inlet connection: 3/4" NPT	
Deck thickness maximum: 2-1/8"	
Handle spread maximum: 19"	

DT-S-RGH



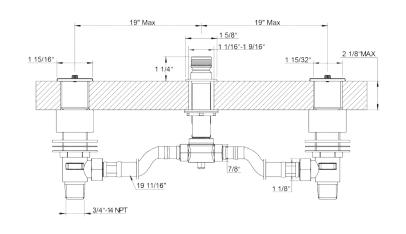


DECK-MOUNT TUB FAUCET WITH HANDSHOWER ROUGH

Rough valve for deck tub sets with handshower 15-03-T and 17-03-T
Flühs volume control cartridges
Inlet connection: 3/4" NPT
Deck thickness maximum: 2-1/8"
Handle spread maximum: 19"

DTHS-S-RGH



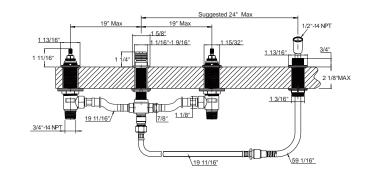



COMPLIANCE

At Crosswater London we pride ourselves on our track record of exceeding the industry's most exacting standards. In the UK, we hold more WRAS (Water Regulation Advisory Scheme) listings than any other British faucet manufacturer. In order to obtain a WRAS listing we have to show that our products not only exceed British standards but that the quality of the product we supply to our customers is maintained.

This is also the ethos we have followed in North America. All our basin faucets comply with low lead standards. We have faucets, shower heads and toilets that meet the water saving requirements of both WaterSense and the California Energy Commission. Not content with simply meeting the relevant ASME standards, we have chosen to seek IAPMO listing so we can apply the cUPC mark to our products. Again, we do this to assure our customers that we not only comply with the relevant legislation but that we maintain the highest possible quality standards throughout our product range.

In order to achieve this we use the best components from top European suppliers such as Flühs, Neoperl, Vernet and Kerox. We have our own Research and Development team, our own product designers and a dedicated quality and compliance team who ensure that every product we make adheres to strict quality controls.







THE CROSSWATER I ONDON WARRANTY

Our commitment to guality & excellence

CROSSWATER LIMITED WARRANTY

The following are the terms and conditions of Crosswater London USA's ("Crosswater London's") exclusive written warranty. No warranty by any person in addition to or different from those made in this limited warranty shall be binding on Crosswater London.

LIMITED COMMERCIAL WARRANTY

Crosswater London products used commercially are warranted by Crosswater London to be free from manufacturing defects for a period of one (1) year from the date of acquisition by original purchaser. This limited warranty is subject to the "warranty exclusions and disclaimers" set forth opposite.

LIMITED RESIDENTIAL WARRANTY

Crosswater London warrants that it will, at its election, repair, replace or make appropriate adjustment for any product that proves defective in materials and/or workmanship under normal residential installation, use and service within the warranty period for that product as stated in the "Residential Warranty Periods" set forth below. This limited warranty is limited to normal domestic use only and excludes damage resulting from reasonable wear and tear, misuse, abuse, neglect, or improper installation, maintenance and repair. This limited warranty is provided to the original purchaser only and is not transferable. Labor charges incurred by the purchaser to repair, replace, install or remove any product are not covered by this warranty.

This limited warranty is subject to the "warranty exclusions and disclaimers" set forth opposite.

RESIDENTIAL WARRANTY PERIODS

All Crosswater London products are covered by a Limited Lifetime warranty except mechanical parts of toilets and ITD-5135 (5 years), and toilet seats (1 year).

FINISHES AND DRAINS

Limited Lifetime warranty on all finishes except living finishes and drains which are excluded from the warranty. Due to the nature of drain usage, there is no finish warranty on any drain product (including lavatory and bathtub drains).

WARRANTY EXCLUSIONS AND DISCLAIMERS

To the maximum extent permitted by law, Crosswater London makes no other warranty, express or implied. To the maximum extent permitted by law, Crosswater London expressly disclaims the implied warranties of merchantability and of fitness for a particular purpose, and all other obligations or liabilities on the part of Crosswater London. Under no circumstances shall Crosswater London's liability to buyer or any third party, whether in contract, in tort, under any warranty, in negligence or otherwise, exceed the purchase price paid for the product. In no event (including with respect to any implied warranties that may not be waived or disclaimed as a matter of law) will Crosswater London be liable for any economic, special, incidental, indirect or consequential damages, whether based on breach of warranty, breach of contract, negligence, strict

liability, or any other legal theory or otherwise. Without limitation to the foregoing sentence, damages that Crosswater London will not be responsible for include, but are not limited to: loss of profits, loss of savings or revenue; loss of use of the product or any associated equipment; cost of capital; cost of any substitute equipment, facilities, or services; downtime; the claims of third parties, including customers; loss of goodwill, loss of business opportunities and/or damages on account of personal injury, physical harm or injury to property.

WARRANTY CLAIMS

Warranty claims may be made by calling (844) 992-8371 or by writing to:

Crosswater London 393 Fortune Boulevard Milford, MA 01757

info@crosswaterlondon.com

Proof of purchase (original sales receipt) from the original purchaser must be made available to Crosswater London for all warranty claims. This Limited Warranty applies only to products that are installed in the United States of America and Canada.

To the maximum extent permitted by law, Crosswater London is providing this limited warranty in lieu of all other warranties, expressed or implied. To the maximum extent permitted by law, any implied warranty, including the implied warranties of merchantability or fitness for a particular purpose, are limited in duration to the duration of this warranty, or the applicable limitations period set by your state or province, whichever is shorter.

Crosswater London USA is a trade name of Bathroom Brands US, LLC, which is solely responsible for this warranty. Effective: September 2018

THE CROSSWATER LONDON **TERMS & CONDITIONS**

DELIVERY RECEIPTS

On receipt of delivery please inspect goods to ensure all items are in satisfactory condition.

Any missing items or damaged goods must be reported within 5 days of delivery and prior to installation. Any claims made outside of this time frame will not be accepted.

To submit a claim for damaged or missing goods, please send an email with details of the issue, purchase order number, and images to returns@crosswaterlondon.com.

Crosswater London will not accept claims relating to goods that have been delivered to a third party forwarding agent for onward shipment.

Please note that all delivery dates are given in good faith. While every effort is made to deliver orders as promptly as possible Crosswater London cannot be held liable for any associated costs relating to a late delivery.

INCORRECT ITEMS AND DEFECTIVE PRODUCTS

If incorrect item(s) have been received, please contact Crosswater London as soon as possible. The correct item(s) will be shipped promptly and the incorrect item(s) will be picked up at the expense of Crosswater London.

If a product fault has been identified following installation please contact Crosswater London technical support for assistance. Please do not remove the installed product until instructed by Crosswater London as the issue may need assessment. Similarly, if a part is missing, please do not reorder the complete item and request a RGA unless instructed by Crosswater London. In many instances, part(s) will be provided to resolve the issue, eliminating the need for a return.

If it is determined that a product is faulty and needs to be returned, a return label will be issued and full credit will be given once the product is received in our warehouse. Return labels expire 30 days after issue and if allowed to expire Crosswater London is no longer responsible for return shipping.

Any labor costs relating to a defective Crosswater London product may be submitted for review and will be reimbursed at the sole discretion of Crosswater London. All labor compensations will be in the form of a Crosswater London dealer account credit. Please refer to the guarantee for full warranty terms and conditions.

RETURNS

Crosswater London offers the opportunity to return an item that is no longer required (consumer has changed mind/specification). In these instances, the item should be uninstalled and in perfect condition (including packaging) and notification of the request must be received by Crosswater London within 30 days of receipt. A 25% restocking charge will be applied to all returns unless the item is being exchanged, in which case the restocking fee will be reduced to 12.5%. This does not apply to items that are marked special order/non-returnable. Customers are responsible for return shipping unless the Returns will be kept open for 6 weeks at which time they will be closed. Any returns received after this time will not be processed. Please allow 5-7 business days from the date the return is received by Crosswater London for credit to be issued to accounts.

product is deemed faulty. Please send all RGA requests to returns@crosswaterlondon.com RGA paperwork must be included with all returns or the return will not be accepted. Local returns/drop-offs will require a signature to indicate Crosswater London has received the return. If returned goods are damaged or not in the original packaging, credit will be denied and the option offered for Crosswater London to dispose of the item(s) or for the Book revised June 2019. item(s) to be returned.

COMPANY DIRECTORY

Main: 508-381-0433 Toll Free: 844-992-8371

Fax: 508-381-6068

Crosswater London 393 Fortune Boulevard Milford, MA 01757

info@crosswaterlondon.com www.crosswaterlondon.com

General inquiries & stock inquiries: info@crosswaterlondon.com

Order and shipping inquiries: orders@crosswaterlondon.com

Marketing and collateral inquiries: marketing@crosswaterlondon.com

Replacement requests and technical inquiries: technical@crosswaterlondon.com

RGA requests and return inquiries: returns@crosswaterlondon.com











BEREA 220



LEYDEN 244

UNION 11

WISP 137

WALDORF 41

BELGRAVIA 75

ARCADE 107



K

DIAL 203





SHOWERING 321





BASINS 336

BATH FURNITURE 359

OUR COLLECTIONS

MPRO 169

From the quintessentially British to the sleek and modern, we are proud to offer a range of exquisitely designed products to suit all bathroom requirements.



BASIN TRAPS 440 WASTES 442

ROUGHS 444





DARBY 270



TAOS 296





TOILETS 371



BATHTUBS 382



FINISHES 6 WARRANTY & DIRECTORY 460



























crosswater×

393 Fortune Boulevard, Milford MA 01757 Tel: 1-844-992-8371 Email: info@crosswaterlondon.com

crosswaterlondon.com